







MXF 1027 *XSafe EcoX*

Modular Ice Machine 501 kg

Scotsman®
Ice Systems

Item
Project
Quantity

		FEATURES <ul style="list-style-type: none">• Top Materials: AISI 304 Stainless steel and new removable grid• Core Ice System: Stable evaporator system (Axial load).• New Core Evaporator: Highly balanced auger (double fly system).• New Gearmotor: Evaporator strability improved and noise free.• Innovative Ice Breaker: Very dry flake ice - 12% of water contents.• Durable Operations: High efficiency and better performance.• Easy to Clean: Facilitated cleaning process and XSafe standard.• New High-tech Water Sump with easy regulation system.• New ice level sensor: for seamless operations.• New Display: Touch & Smart.• XWave: New App with improved electronics and programming.		
	CONDENSING SYSTEM Air cooled Water cooled	RECOMMENDED BIN		
		BIN	KG	
		SB530	243	
	REFRIGERANT GAS R290			
	VOLTAGE V/HZ/PH 230\50\1			
CERTIFICATIONS   		OPERATING REQUIREMENTS		
IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.			Minimum	Maximum
		Air temperature	10	43
		Water temperature	5	38
		Water pressure	1 bar (14 psi)	5 bar (70 psi)
		Electrical voltage	-10%	+10%
		www.scotsman-ice.it www.scotsman-ice.com		

Modular Ice Machine 501 kg

April 2025

MXF 1027 *XSafe EcoX*


Modular Ice Machine 501 kg

Scotsman®
Ice Systems

Item

Project

Quantity

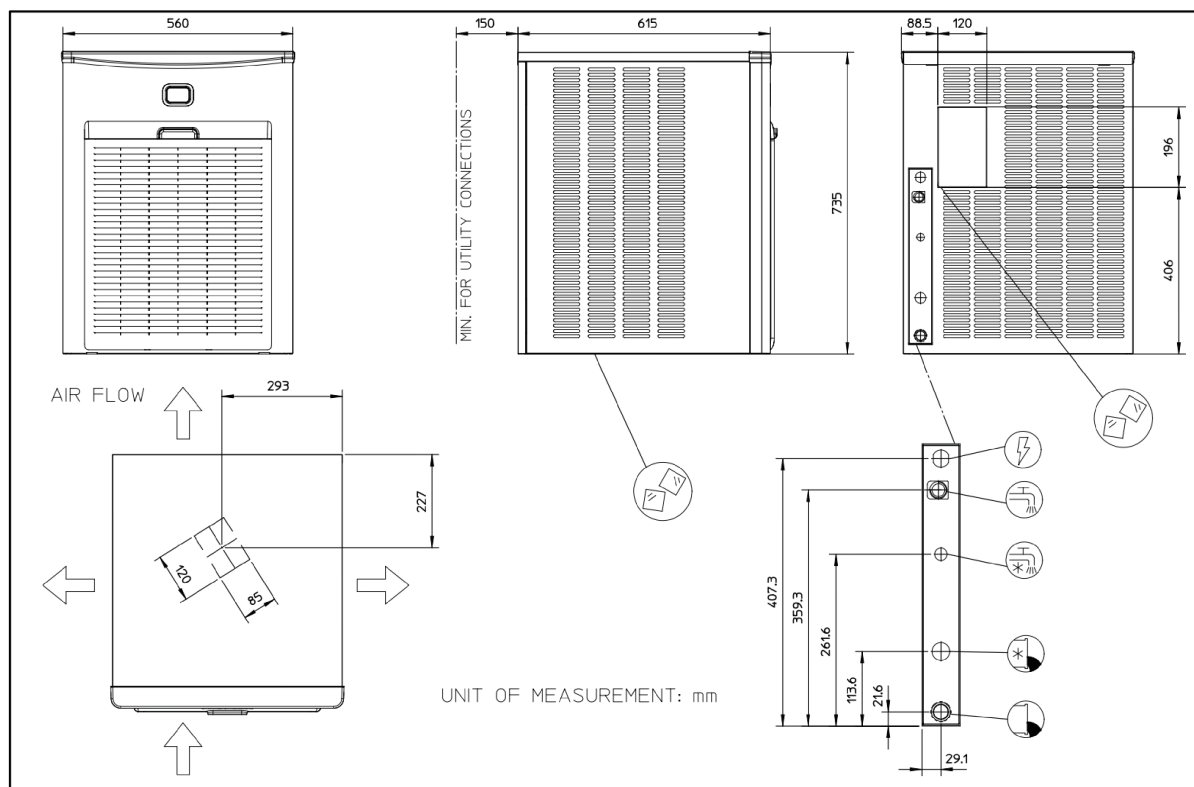

Modular Ice Machine 501 kg

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)								
560 x 615 x 735 mm			910 x 690 x 630 mm								
Net weight			Gross weight								
80 kg			90kg								
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
MXF 1027 AS OX	230\50\1	A	501	430	314	3,3	35	13	1.570	3 x 1,5	10
MXF 1027 WS OX	230\50\1	W	500	480	395	2,8	30	189	1.400	3 x 1,5	10

Milano

Madrid

Chicago

Dubai

Singapore

Shanghai

Johannesburg