

MXF 1237






XSafe EcoX

Modular Ice Machine 550 kg

Scotsman®

Ice Systems

Item
Project
Quantity

		FEATURES <ul style="list-style-type: none">• Top Materials: AISI 304 Stainless steel and new removable grid• Core Ice System: Stable evaporator system (Axial load).• New Core Evaporator: Highly balanced auger (double fly system).• New Gearmotor: Evaporator strability improved and noise free.• Innovative Ice Breaker: Very dry flake ice - 12% of water contents.• Durable Operations: High efficiency and better performance.• Easy to Clean: Facilitated cleaning process and XSafe standard.• New High-tech Water Sump with easy regulation system.• New ice level sensor: for seamless operations.• New Display: Touch & Smart.• XWave: New App with improved electronics and programming.	
	CONDENSING SYSTEM Air cooled Water cooled	RECOMMENDED BIN	
	REFRIGERANT GAS R290	BIN	KG
		SB530	243
	VOLTAGE V/HZ/PH 230\50\1		
CERTIFICATIONS  	OPERATING REQUIREMENTS		
		Minimum	Maximum
	Air temperature	10	43
	Water temperature	5	38
	Water pressure	1 bar (14 psi)	5 bar (70 psi)
	Electrical voltage	-10%	+10%
IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.		www.scotsman-ice.it www.scotsman-ice.com	

Modular Ice Machine 550 kg

April 2025

MXF 1237 *XSafe EcoX*


Modular Ice Machine 550 kg

Scotsman®
Ice Systems

Item

Project

Quantity

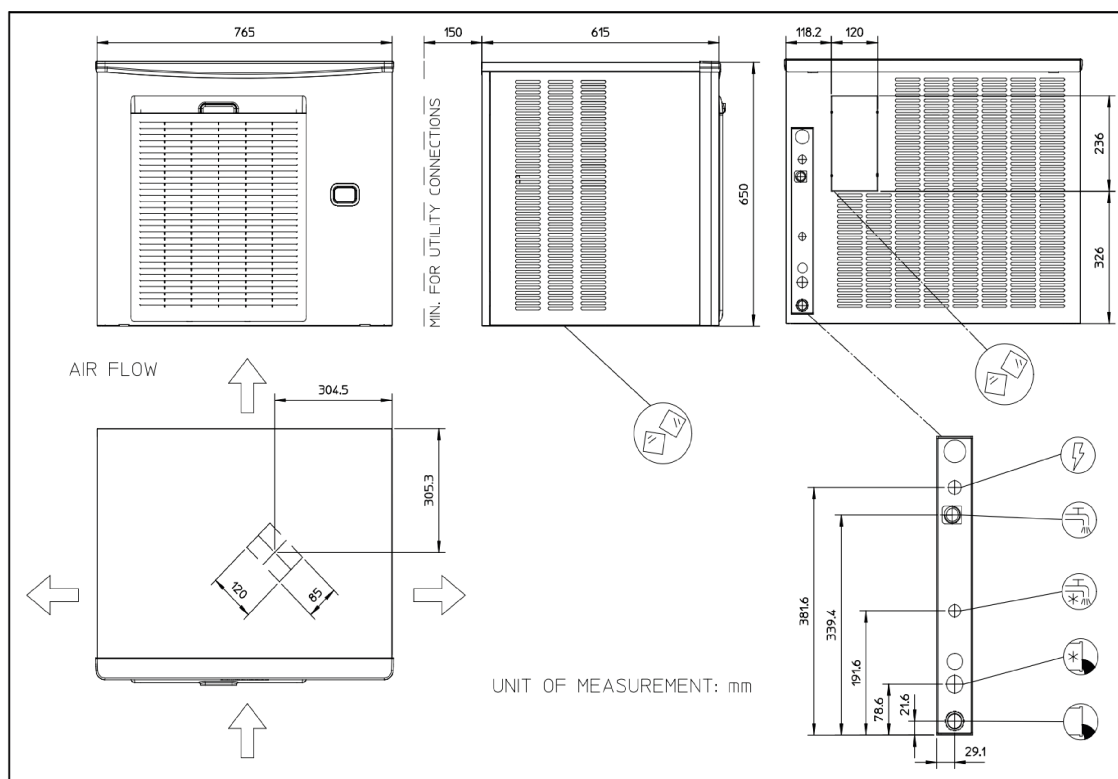

Modular Ice Machine 550 kg

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)								
765 x 615 x 650 mm			830 x 690 x 830 mm								
Net weight			Gross weight								
85 kg			97kg								
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
MXF 1237 AS OX	230\50\1	A	550	480	360	4,3	45	16	2.050	3 x 2,5	16
MXF 1237 WS OX	230\50\1	W	550	520	450	3,8	37	157	1.560	3 x 1,5	16

Milano

Madrid

Chicago

Dubai

Singapore

Shanghai

Johannesburg