




BONVUE CAKE DISPLAY

SF820V

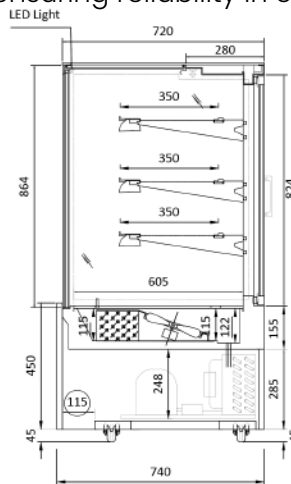

This refrigerated display unit, with its solid construction, is a practical choice for any cake shop or café. The Bonvue refrigerated display cabinet is a product of strong practicality and superior quality, meticulously crafted and designed for the display of pastries, cakes, fruits, and dairy products. Designed for performance in Climate Class 3 conditions, ensuring reliability in extreme temperatures.

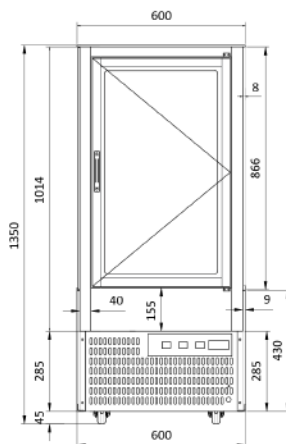

FEATURES AND FUNCTIONALITIES	
Cooling System	Fan Forced Cooling
Compressor Unit	SECOP
Energy Efficiency	TBC
Exterior & Interior of the Cabinet	AISI304 interior and exterior
Ergonomical Design	Digital controller, LED lights, 4 casters for easy movement, 2.24L Copper tube.
Durable Door Profile	2 Doors, Glass sliding door.
Shelves	3 Tempered glass shelves with AISI304 triangular support.
Glass Design	Tempered ITO heated glass on the front, top, and sides prevents fogging for clear visibility.

PERFORMANCE SPECIFICATION	
Max. ambient temp/RH	32°C 60%
Climate Class	TBC
Temperature	+2°C to +8°C
Rated kWh/year	TBC
Refrigerant	R290 (80g)
Energy Efficiency Index (EEI)	TBC
Star Rating / GEMS Rating	TBC

SAFETY & STANDARDS	
GEMS(Refrigerated Cabinets) Determination 2024 ;	
ISO 23953-1:2015; ISO 23953-2:2015;	

PHYSICAL QUALITIES	
Width (mm)	600
Depth (mm)	740
Height (mm)	1350
Packing Width (mm)	650
Packing Depth (mm)	790
Packing Height (mm)	1500
Net Weight (kg)	128
Total Capacity (L)	370
Total Display Area [m²]	TBC

TECHNICAL DESCRIPTION	
Power Cord	10Amp plug and lead
Power cord length	1.9m outside cabinet
Power Supply	240V/50Hz, 660W
Rated Current	3.18A
Evaporator Design	Copper tube, 16Wx3 fans
Compressor Cooling Capacity(W)	TBC
LED Lights	Color temperature 6300K, 6.6W x 3 LED strips under shelves 6.6W x 1 LED strip top middle 6.6W x 1 LED strip upper near front glass.

WARRANTY 2 Years Parts & Labour Plus 2 Years Parts Only Warranty When Products Registered Within 14 Days of Invoice	
--	--



ISO 23953-1:2015
ISO 23953-2:2015

