


BONVUE CAKE DISPLAY

SF830V



This refrigerated display unit, with its solid construction, is a practical choice for any cake shop or café. The Bonvue refrigerated display cabinet is a product of strong practicality and superior quality, meticulously crafted and designed for the display of pastries, cakes, fruits, and dairy products. Designed for performance in Climate Class 3 conditions, ensuring reliability in extreme temperatures.

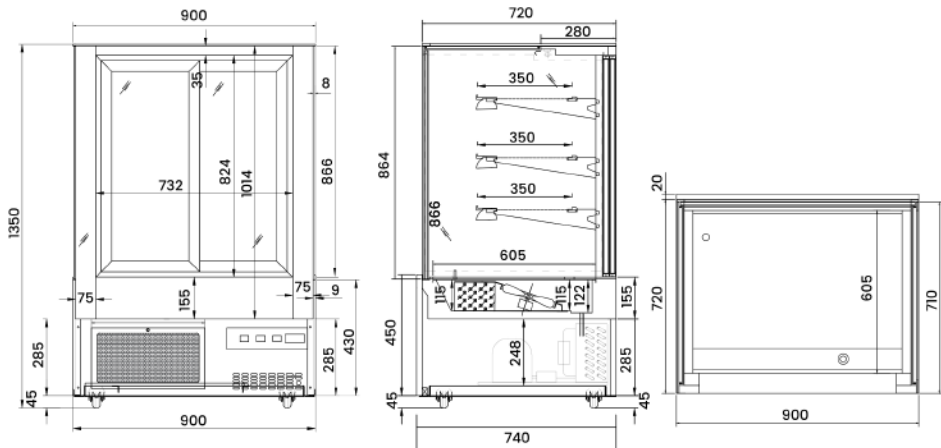

FEATURES AND FUNCTIONALITIES

Cooling System	Fan Forced Cooling
Compressor Unit	SECOPI
Energy Efficiency	14.10 kWh/24h
Exterior & Interior of the Cabinet	AISI304 interior and exterior
Ergonomical Design	Digital controller, LED lights, 4 casters for easy movement, 2.24L Copper tube.
Durable Door Profile	2 Doors, Glass sliding door.
Shelves	3 Tempered glass shelves with AISI304 triangular support.
Glass Design	Tempered ITO heated glass on the front, top, and sides prevents fogging for clear visibility.

PERFORMANCE SPECIFICATION

Max. ambient temp/RH	32°C 60%
Climate Class	3
Temperature	+2°C to +8°C
Rated kWh/year	5146.5
Refrigerant	R290 (110g)
Energy Efficiency Index (EEI)	47.97
Star Rating / GEMS Rating	4 (3M2)

SAFETY & STANDARDS

GEMS(Refrigerated Cabinets) Determination 2024 ;
ISO 23953-1:2015; ISO 23953-2:2015;

PHYSICAL QUALITIES

Width (mm)	900
Depth (mm)	740
Height (mm)	1350
Packing Width (mm)	950
Packing Depth (mm)	790
Packing Height (mm)	1500
Net Weight (kg)	166
Total Capacity (L)	560
Total Display Area [m²]	2.23

TECHNICAL DESCRIPTION

Power Cord	10Amp plug and lead
Power cord length	1.9m outside cabinet
Power Supply	240V/50Hz, 845W
Rated Current	4.84A
Evaporator Design	Copper tube, 16Wx3 fans
Compressor Cooling Capacity(W)	868
LED Lights	Color temperature 6300K, 11.4Wx3 LED strips under shelves 11.4Wx1 LED strip top middle 11.4Wx1 LED strip upper near front glass.

WARRANTY

2 Years Parts & Labour Plus 2 Years Parts Only Warranty
When Products Registered Within 14 Days of Invoice



ISO 23953-1:2015
ISO 23953-2:2015

