


# BONVUE CAKE DISPLAY

## SF840V



This refrigerated display unit, with its solid construction, is a practical choice for any cake shop or café. The Bonvue refrigerated display cabinet is a product of strong practicality and superior quality, meticulously crafted and designed for the display of pastries, cakes, fruits, and dairy products. Designed for performance in Climate Class 3 conditions, ensuring reliability in extreme temperatures.

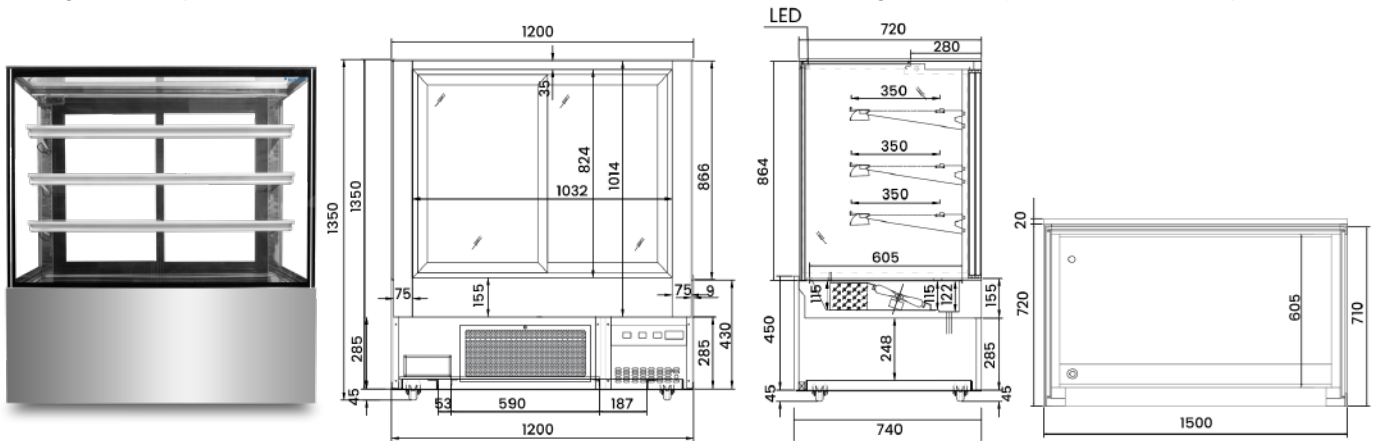

FEATURES AND FUNCTIONALITIES	
Cooling System	Fan Forced Cooling
Compressor Unit	SECOP
Energy Efficiency	18.2 kWh/24h
Exterior & Interior of the Cabinet	AISI304 interior and exterior
Ergonomical Design	Digital controller, LED lights, 4 casters for easy movement, 2.24L Copper tube and 4L movable, Water tray evaporation.
Durable Door Profile	2 Doors, Glass sliding door.
Shelves	3 Tempered glass shelves with AISI304 triangular support.
Glass Design	Tempered ITO heated glass on the front, top, and sides prevents fogging for clear visibility.
PERFORMANCE SPECIFICATION	
Max. ambient temp/RH	32°C 60%
Climate Class	3
Temperature	+2°C to +8°C
Rated kWh/year	6643
Refrigerant	R290 (140g)
Energy Efficiency Index (EEI)	51.28
Star Rating / GEMS Rating	4 (3H2)

SAFETY & STANDARDS	
GEMS(Refrigerated Cabinets) Determination 2024 ;	
ISO 23953-1:2015; ISO 23953-2:2015;	

PHYSICAL QUALITIES	
Width (mm)	1200
Depth (mm)	740
Height (mm)	1350
Packing Width (mm)	1250
Packing Depth (mm)	790
Packing Height (mm)	1500
Net Weight (kg)	190
Total Capacity (L)	740
Total Display Area [m²]	2.9

TECHNICAL DESCRIPTION	
Power Cord	10Amp plug and lead
Power cord length	1.9m outside cabinet
Power Supply	240V/50Hz, 1146W
Rated Current	5.98A
Evaporator Design	Copper tube, 16Wx3 fans
Compressor Cooling Capacity(W)	991
LED Lights	Color temperature 6300K, 15.8W x 3 LED strips under shelves 15.8W x 1 LED strip top middle 15.8W x 1 LED strip upper near front glass.

<b>WARRANTY</b> 2 Years Parts & Labour Plus 2 Years Parts Only Warranty When Products Registered Within 14 Days of Invoice	
--	--



ISO 23953-1:2015  
ISO 23953-2:2015

