



BONVUE CAKE DISPLAY SF RANGE

Bonvue refrigerated display cabinet is a product of strong practicality and superior quality, meticulously crafted and designed for the display of pastries, drinks, cakes, fruits, and dairy products. Bonvue stands as one of the leading brands in the multi-functional kitchen utensils and display stand sector. This refrigerated display unit, with its solid construction, is a practical choice for any cake shop or café.

Key Features



GEMS Compliant

4 Star GEMS Rating
Greenhouse and energy
minimum standards



Fan Forced Cooling

Uniform frost-free
performance, keeps the
cake perfectly textured
and tasty



360° Unobstructed Display

Showcase the vibrant colors
and texture of Cake



Tempered ITO heated glass

Prevents fogging
for clear visibility



SF820V

600x767x1350mm



SF830V

900x740x1350mm



SF840V

1200x740x1350mm



SF850V

1500x740x1350mm



SF860V

1800x740x1350mm

Product Design Overview



Brilliant LED Lighting

Showcases items with several individually lights



Adjustable Cake Displays

With three adjustable glass shelves



Rodent Mesh

Enhances hygiene and food safety



Fan Forced Cooling with Auto Defrost

Ensures uniform frost-free performance




Easy Movement And Positioning

Flush edging, adjustable feet for easy leveling and stable display

Details

Designed for freshness and stunning presentation, our refrigerated cake displays come in five length options. Three adjustable glass shelves plus a base maximize your display space. Cool white LED lighting on each level highlights your desserts beautifully. Fan forced cooling and automatic evaporation ensure even, frost-free performance. Digital temperature controller.

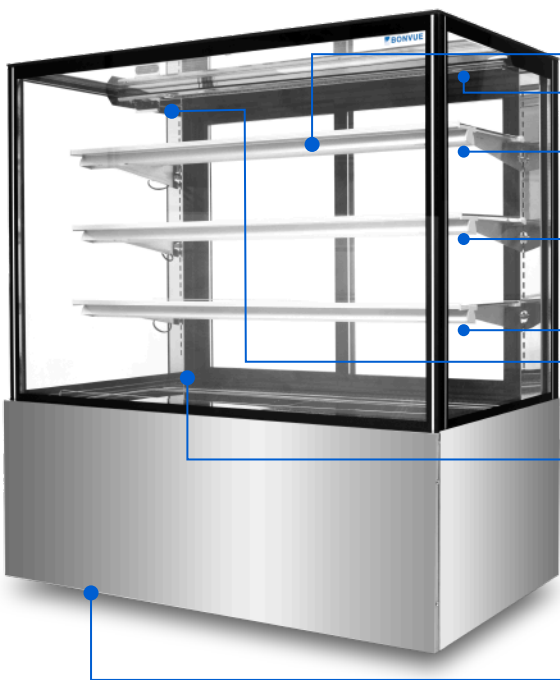

- 3 Tempered glass shelves with AISI304 triangular support



- Color temperature 6300K Cool white LED lighting




- Digital temperature display



- Tempered ITO heated glass on front, top and sides



- AISI304 interior and exterior

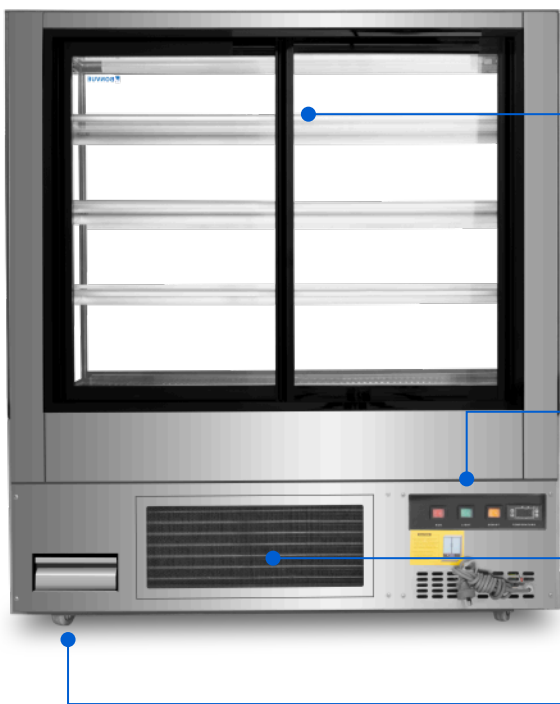

- Sliding Glass Door



- 4L Water overflow tray



- Temperature Controller



- The filter can be opened at 45° and replaced

45°




- Castor Wheels


Product Summary




SF820V

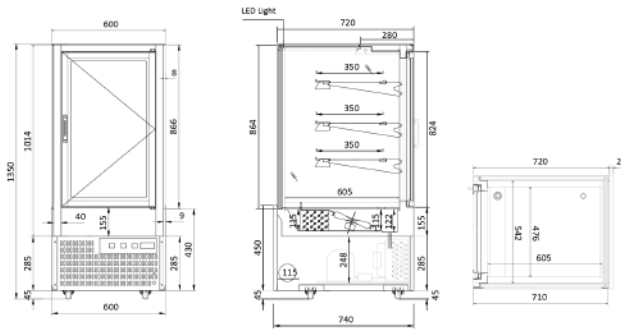


SF830V

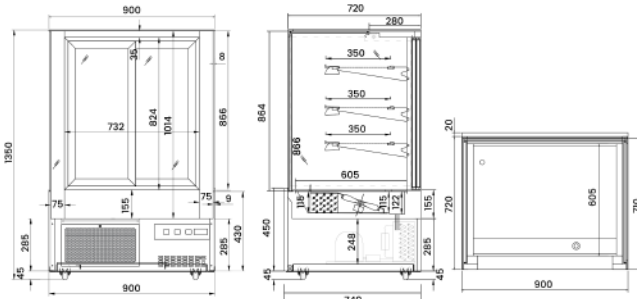



SF840V

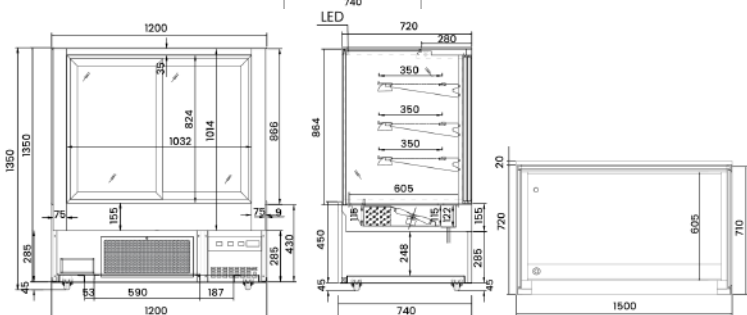

SF850V

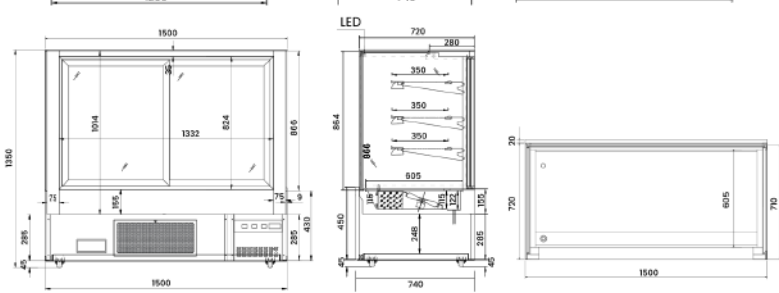

SF860V

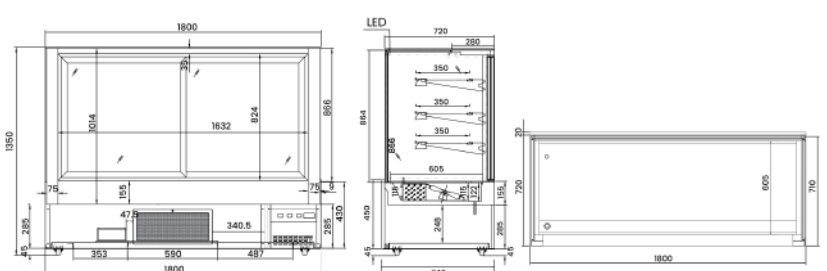

Code	Cooling System	GEMS Star Rating	Dimensions (W x D x H mm)	Weight (kg)	Temperature	Max. ambient temp/RH%	Power (W/A)	Energy Efficiency	Total Capacity (L)	Total Display Area [m²]	Refrigerant
SF820V	Fan Forced Cooling	4	600x767x1350	128	+2°C to +8°C	32°C60%	660/10	TBC	370	TBC	R290 (80g)
SF830V	Fan Forced Cooling	4	900x740x1350	166	+2°C to +8°C	32°C60%	845/10	14.1 kWh/24h	560	2.23	R290 (110g)
SF840V	Fan Forced Cooling	4	1200x740x1350	190	+2°C to +8°C	32°C60%	1146/10	18.2 kWh/24h	740	2.9	R290 (140g)
SF850V	Fan Forced Cooling	4	1500x740x1350	236	+2°C to +8°C	32°C60%	1380/10	21.7 kWh/24h	930	3.46	R290 (120g)
SF860V	Fan Forced Cooling	4	1800x740x1350	256	+2°C to +8°C	32°C60%	1422/10	26.1 kWh/24h	1120	3.9	R290 (170g)

Customisation Options



Customised base

Marble Base



Wooden Base



Black Stainless Steel Base



Suitable For Various Scenarios



Cake Shops



Cafes



Dessert Shops



Supermarkets



Convenience Stores



Restaurants