

VEE RAY SINGLE PAN GAS FRYER 600mm

GT60-HPO

- 140 MJ/hr continuous production single pan fryer
- High Power Output infra-red burner system
- Easy clean stainless steel open pan with 10 year limited warranty
- 31L oil tank capacity
- 2 large or 3 standard basket capacity
- Large capacity cool zone
- 32mm (1 1/4") drain valve
- Rear rollers
- Stainless steel exterior
- Easy service
- Fully modular



GT60-HPO

Overall Construction

- Stainless steel pan with 10 year limited warranty
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.2mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Vitreous enamelled control panel
- 32mm (1 1/4") drain valve
- 63mm dia. heavy-duty 1.2mm 304 stainless steel adjustable legs at front and two rollers at rear
- 2 large standard baskets and stainless steel lid supplied standard

Controls – Burner System

- Electronic thermostat
- Large easy use control with easy view scale
- Thermostat range 90 – 195°C
- Over-temperature safety cut-out
- Full electronic ignition system
- Two 70MJ/hr power infra-red burners
- Independent LH and RH burner systems
- Lock-out alarm indicators on front panel

Cleaning and Servicing

- Open stainless steel pans for easy clean
- Easy clean basket support bar
- 32mm (1 1/4") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

VEE RAY SINGLE PAN GAS FRYER 600mm

GT60-HPO

Specifications

Production rate

50kg/hr

Pan Size

Width 515mm

Length 380mm

Oil frying depth 95mm

Oil capacity 31L (46.5lbs shortening)

Baskets

2 chrome plated large wire baskets

210mm W x 335mm D x 145mm H

Optional 3 chrome plated standard wire baskets

145mm W x 335mm D x 145mm H

Stainless steel perforated basket support plate

Burners

2 x 70MJ/hr power infra-red burners

Gas Power

140MJ/hr, 39kW

Gas connection

R 3/4 (BSP) male

Optional rear connection
(refer specification drawing)

Electrical Connection

230-240 Vac, 1P+N+E, 50/60Hz, 0.5A

3 pin 10A plug cordset fitted

Dimensions

Width 600mm

Depth 812mm

Height 915mm

Incl. splashback 1085mm

Nett weight

100kg

Packing data

0.70m³, 148kg

Width 870mm

Depth 645mm

Height 1255mm

Gas types

Available in Natural gas and LP gas, please specify when ordering

Units supplied complete with gas type

conversion kits

Other gas types on request

Options

Adjustable feet at rear

Filtamax Filtration System

Fish plates


Extra large baskets

Standard baskets

Side splash guards

Joining caps

Castors

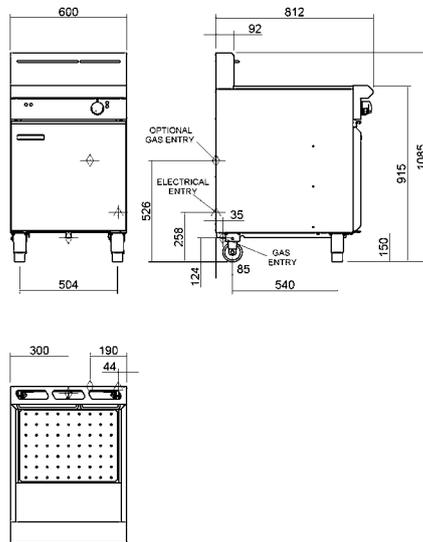

moffat.com.au

moffat.co.nz

Australia

moffat.com.au

Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +612-8833 4111
nswsales@moffat.com.au

South Australia
Telephone +613-9518 3888
vsales@moffat.com.au

Queensland
Telephone +617-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone +618-9413 2400
wasales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited

Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz



Cert. No. 6125

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.BSE.01.19/1620

an Ali Group Company



The Spirit of Excellence