


# MICROWAVE SPEED OVEN

## NP-MWO-T



The compact speed oven is designed to provide customers with an extremely fast, energy-efficient, cost-effective, and easy-to-operate cooking solution. Equipped with microwave, top and bottom heating elements, it ensures rapid and even cooking, making it perfect for busy food service environments.

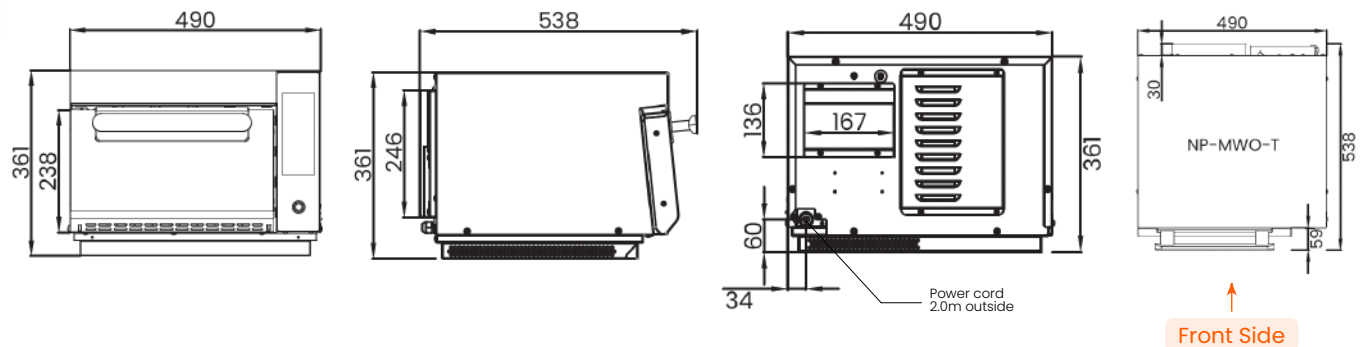

### FEATURES AND FUNCTIONS

|                                                               |                                                                                                                     |
|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Power Source                                                  | Electric                                                                                                            |
| Cooking Mode                                                  | Microwave + Thermal radiation                                                                                       |
| Cooking Area                                                  | 240×150×75mm, AISI304                                                                                               |
| Cooking Stage                                                 | 5                                                                                                                   |
| Exterior & Interior of the Cabinet                            | Exterior body AISI304<br>Interior AISI304                                                                           |
| Ergonomic Design                                              | 6.8-inch screen controller,<br>9 Pre-set Cooking Programs,<br>Timing and heating indicators,<br>USB upload/download |
| Heating Method/Type                                           | Microwave + Thermal radiation                                                                                       |
| Heat Radiation Level                                          | Low, Medium, High, Strong,<br>and Off five gears                                                                    |
| Standard Accessories<br>Loading Capacity Per<br>Shelves/Trays | 1.5kg                                                                                                               |
| Energy Consumption                                            | Device standby mode 0.37 kW/h                                                                                       |
| Door & Door Handle                                            | Door AISI304,<br>Door handle Aluminum alloy                                                                         |

### TECHNICAL DESCRIPTIONS

|                   |                                            |
|-------------------|--------------------------------------------|
| Power Cord        | 3*1.5mm <sup>2</sup> , 15Amp plug and lead |
| Power Cord Length | 2m outside cabinet                         |
| Power Supply      | 240V/50Hz                                  |
| Rated Power       | 3300W/13.8A                                |

### PHYSICAL QUALITIES

|                     |      |
|---------------------|------|
| Width (mm)          | 490  |
| Depth (mm)          | 538  |
| Height (mm)         | 361  |
| Packing Width (mm)  | 613  |
| Packing Depth (mm)  | 601  |
| Packing Height (mm) | 433  |
| Net Weight (kg)     | 42.8 |
| Gross Capacity (L)  | 8.6  |
| Net Capacity (L)    | 2.7  |

### PERFORMANCE SPECIFICATION

|                                      |                                                                                                              |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Ingress Protection Class             | IPX3                                                                                                         |
| Temperature Range                    | 170 to 250°C                                                                                                 |
| Preheating Time                      | 3 min - 3 min 30s to 200 °C                                                                                  |
| Safety cut-out and<br>reset settings | 280 °C temperature limiter<br>(back panel - manual reset)                                                    |
| Overheat Protection                  | Overheating protection at 140 °C<br>and 120 °C (This is for the overheating<br>protection of the magnetron.) |
| Noise Level                          | Below 65 decibels                                                                                            |

### WARRANTY

1 Year Parts & Labour Plus 1 Year Parts Only Warranty When  
Products Registered Within 14D Of Invoice



To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.



IEC 60335-2-90:2015 + A1:2019  
IEC 60335-2-36:2017  
IEC 60335-1:2010 + A1:2013 + A2:2016