



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

FED-X XURF1200S2V Four-Door Upright Freezer – 1236L Tropical Stainless Steel

Model / SKU: XURF1200S2V

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.


Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/3932/product/5232/>

SOLID SPLIT DOOR UPRIGHT FREEZER

XURF1200S2V



Four half door upright freezer features a stainless steel interior and exterior with rounded corners for easy cleaning, and it has an automatic defrost function. Inside, there are three levels of shelving plus a base, with each shelf capable of holding up to 40kg. The self-closing lockable doors come with heavy-duty magnetic seals. It is insulated with HFCs and CFCs free foam and tropicalised for Australian conditions. User-friendly digital controls and internal lighting are included, along with an integrated door handle for easy cleaning. Equipped with heavy-duty castors with front wheel brakes for easy movement.

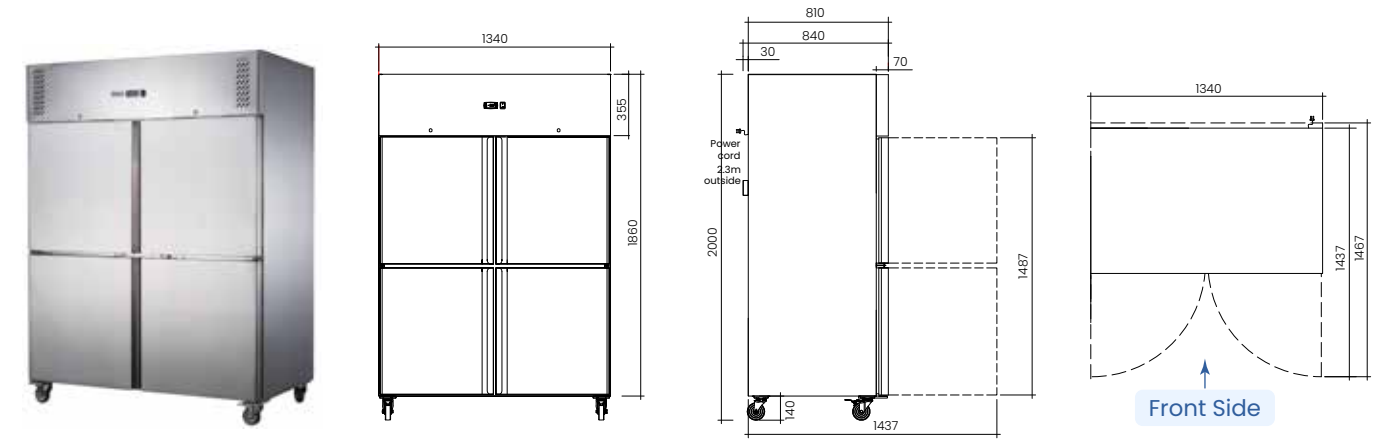

FEATURES AND FUNCTIONS	
Cooling System	Fan Forced Cooling
Energy Consumption	12.33 kWh/24h
Exterior & Interior of the Cabinet	AISI 201 Stainless steel interior and exterior with rounded corners for easy cleaning.
Ergonomic Design	Integrated door handle for easy cleaning, Heavy-duty castors with front-wheel brakes, User-friendly Digital controls and internal lighting Back stopper.
Durable Door Profile	Self-closing lockable doors with heavy-duty magnetic door seals.
Shelves	Plastic coating steel, 534x550mm Weight loading per shelf: 40kg
Ventilation (mm)	Top/Sides/Rear : 50mm

TECHNICAL DESCRIPTION	
Power Cord	10Amp plug and lead
Power cord length	3m (2.3m outside cabinet)
Power Supply	240V/50Hz, 730W
Rated Current	4.8A

SAFETY & STANDARDS	
CE MD EMC Greenhouse and Energy Minimum Standards (Refrigerated Cabinets) Determination 2020 Determination EN60335; EN62233:2008; EN 16825; EN IEC 55014; 61000; AS/NZS60335	

PHYSICAL QUALITIES	
Width (mm)	1340
Depth (mm)	810+30(Back Stopper)
Height (mm)	2000
Packing Width (mm)	1365
Packing Depth (mm)	855
Packing Height (mm)	2150
Net Weight (kg)	177
Gross Capacity (L)	1236
Net Capacity (L)	791

PERFORMANCE SPECIFICATIONS	
Max. ambient temp/RH	43°C 60%
Climate Class	4
Temperature Range	-22°C to -18°C
Rated kWh/year	5370.05
Refrigerant	R290 (150g)
Energy Efficiency Index (EEI %)	83.71
Star Rating / GEMS Rating	2 (4L1)

WARRANTY	
2 Years Parts & Labour Plus 2 Years Parts Only Warranty When Products Registered Within 14 Days of Invoice	



To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.



EN 60335
EN 62233:2008
EN 16825



EN IEC 55014
EN IEC 61000



AS/NZS 60335.2.89:2020
AS/NZS 60335.1:2020

