



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Fagor B-G9051 Kore 900 Chargrill – 400mm NG, 11kW

Model / SKU: B-G9051

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/449/product/5168/>



Catalogue
FOOD SERVICE
Chapter
COOKING

Model
B-G9051 LPG 230V 1N

19075476

28/02/2020

GAS GRILL, B-G9051


- Deep-drawn cooktops manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- Cast iron grills which can be removed without tools, 170 mm-wide sections.
- The iron grills are reversible with different finishes on each side:
 - Tilted and grooved with ridges for meat.
 - Horizontal and flat for fish and vegetables.
- These grills reach a very high temperature (400 °C), meaning that the surface of the product is quickly sealed and inside it remains much juicier.
- Fitted with an opening to collect cooking grease and a tray to store up to 12 litres (one tray for half-module machines, two trays for whole-module machines).
- It is possible to put water in the grease trays and, thanks to the radiation of heat from gas burners or electrical elements, a low intensity steam is produced and grilling can be carried out in a steam environment.
- Machines are fitted with removable 130 mm high guards to prevent splashes, made of stainless steel.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.
- Stainless steel feet with adjustable height.
- Machines with IPX5 grade water protection.
- Burner ignition through electronic spark igniter. With an access tube for manual ignition.
- Spark ignition
- Groups of three high-efficiency tubular burners with radiation deflector (one group of three burners for half-module models and two groups for whole-module models).
- Independent control for each group of burners through a safety valve with thermocouple.

OPTIONAL ACCESSORIES

- Special scraper for cast iron grill.
-
-

DIMENSIONS

X Width	400 mm	X Gross width	440 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	850 mm	Z Gross height	1255 mm
Net Weight	67,0 kg	Gross Weight	80,0 kg
Net volume	0,134 m3	Gross volume	0,564 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,100 kW
Amperage (A)	2A
Voltage	230V - 1N
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	LPG
Gas power	11,00 kW
Gas consumption	0,850 kg/h
Regulated	LPG G30/G31 28-30/37 mbar NG G20/G25/G25.1 20/25/25 mbar

CONNECTIONS TECHNICAL SPECIFICATIONS



Single-phase 230V wiring	2X1,5+T
Gas diameter 1	'R.3/4"G'





www.fagorindustrial.com



B-G9051

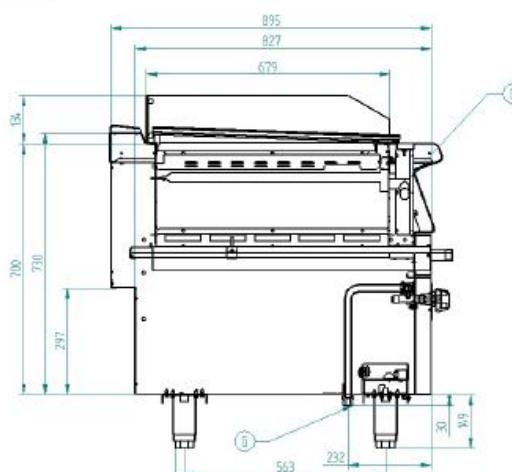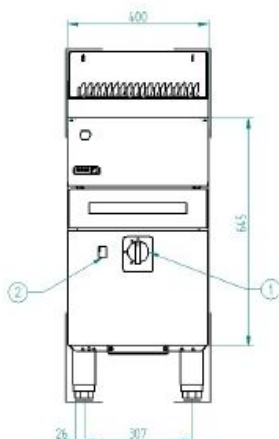

B-G9101

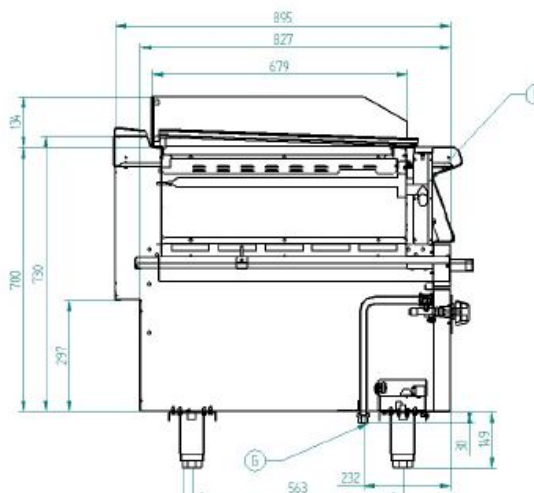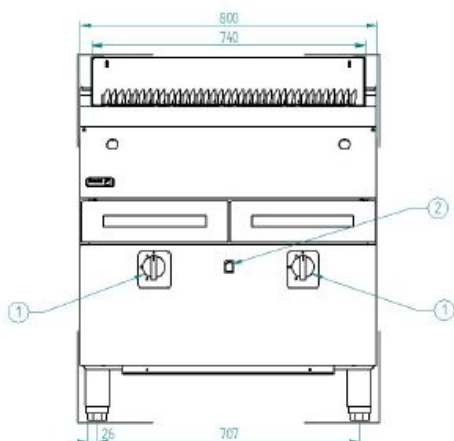

G – Entrada de Gas
D – Desagüe
1 – Grifo válvula de gas
2 – Pulsador tren de chispas

Gas Inlet
Drainage
Gas valve tap
Piezoelectric ignitor