



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Thermaster LG-1000SDBP Upright Drink Fridge – 1000L, Sliding Glass Doors, Black

Model / SKU: LG-1000SDBP


KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4259/product/6509/>



THERMASTER LG SERIES

The Benchmark in Beverage Refrigeration



2 YEARS PARTS & LABOUR PLUS **2 YEARS** PARTS ONLY WARRANTY
WHEN PRODUCTS REGISTERED WITHIN 14 DAYS OF INVOICE



Why Choose Thermaster?

Trusted across Australia's hospitality and retail industry, the Thermaster LG range delivers reliable performance, brilliant product visibility, and energy-efficient cooling.

Built for busy environments, each unit combines aesthetic presentation with durable commercial-grade components Ñ making it the professional's choice for dependable beverage display, day after day.



Proven Reliability

Trusted by professionals nationwide.



Superior Visibility

LED lighting and clear glass doors.



Energy Efficient

Fast, even cooling with low power use.



Built to Last

Durable, commercial-grade design.



Easy Maintenance


Simple to clean and service.






thermaster

FEATURES



- Digital temp. control & read-out
 - Forced air circulation
 - Evaporative drainage
 - Natural and eco-friendly refrigerant
- Interior LED lights
 - 4 castors, 2 with brakes
 - Double glazing tempered glass
 - 4 adjustable levels of shelving
- Self closing doors
 - 7 Star Energy Rating



LG-370P / LG-370BP



LG-540P / LG-540BP



LG-370P



LG-370BP

Gross Capacity (L)	370	370
Net Capacity (L)	335	335
Weight (kg)	72	72
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	268/10	268/10
Dimensions (WxDxH mm)	610x610x1973	610x610x1973



LG-540P



LG-540BP

Gross Capacity (L)	530	530
Net Capacity (L)	495	495
Weight (kg)	83	83
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	310/10	310/10
Dimensions (WxDxH mm)	700x690x2079	700x690x2079



AUS Phone: 1300 659 409
Email: sales@foodequipment.com.au
www.foodequipment.com.au






NZ Phone: 09 415 6470
Email: sales@fedproducts.co.nz
www.fedproducts.co.nz

FEATURES




- LED lighting
 - Digital temp. control & read-out
 - Fan-forced evaporator cooling
 - Self evaporating drainage
- Auto defrost
 - Castors
 - Double glazed doors
 - Self-closing doors with locks
- Light box
 - 4 shelves plus floor
 - Natural and eco-friendly refrigerant



LG-580P / LG-580BP



LG-730P / LG-730BP



LG-580P



LG-580BP

Gross Capacity (L)	568	568
Net Capacity (L)	487	487
Weight (kg)	96.5	96.5
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	349/10	349/10
Dimensions (WxDxH mm)	880x610x1973	880x610x1973



LG-730P



LG-730BP

Gross Capacity (L)	730	730
Net Capacity (L)	670	670
Weight (kg)	113	113
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	450/10	450/10
Dimensions (WxDxH mm)	1120x610x1973	1120x610x1973

FEATURES



- LED lighting
 - Embraco compressor
 - Digital temp. control & read-out
 - Fan-forced evaporator cooling
- Self evaporating drainage
 - Auto defrost
 - Castors
 - Double glazed doors
- Self-closing doors with locks
 - Light box
 - 5 levels of display
 - Natural and eco-friendly refrigerant



LG-1000P / LG-1000BP / LG-1000SDBP



LG-1200P / LG-1200BP

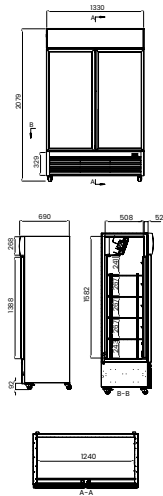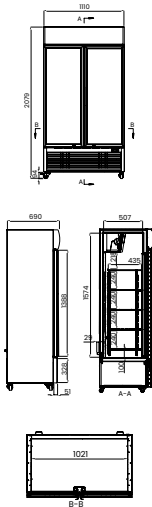

LG-1000P LG-1000BP LG-1000SDBP

Gross Capacity (L)	885	885	862
Net Capacity (L)	825	825	803
Weight (kg)	123	123	126
Temp.Range °C	+2 to +8	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65	38/65
Power (W/A)	470/10	470/10	470/10
Dimensions (WxDxH mm)	1110x690x2079	1110x690x2079	1110x690x2079



LG-1200P LG-1200BP

Gross Capacity (L)	1075	1075
Net Capacity (L)	1000	1000
Weight (kg)	132	132
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	480/10	480/10
Dimensions (WxDxH mm)	1330x690x2079	1330x690x2079



FEATURES

- Illuminated canopy
 - LED lighting
 - Easy adjustable shelves
 - Self-closing glass door
 - External door handle
- 2 layer tempered door glass
 - White powder coated steel plate
 - Automatic defrost and condensate evaporation
 - Lock & key
- Natural and eco-friendly refrigerant
 - Heavy duty castors with brake
 - Digital Temperature controller
 - 12 Shelves




LG-1203P

Gross Capacity (L)	1065
Net Capacity (L)	975
Weight (kg)	157
Temp.Range °C	+2 to +8
Ambient/RH%	38/65
Power (W/A)	555/10
Dimensions (WxDxH mm)	1600x610x1973

LG-1203P



LG-1203BP

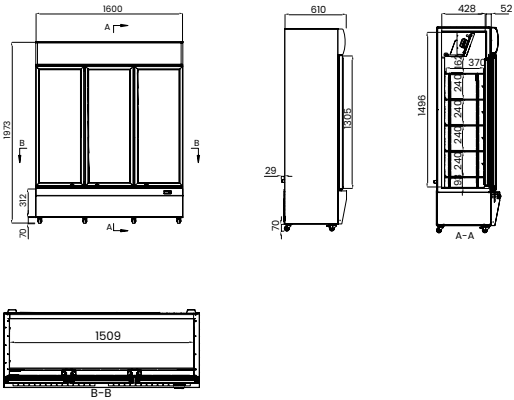

LG-1203BP

Gross Capacity (L)	1065
Net Capacity (L)	975
Weight (kg)	157
Temp.Range °C	+2 to +8
Ambient/RH%	38/65
Power (W/A)	555/10
Dimensions (WxDxH mm)	1600x610x1973



AUS Phone: 1300 659 409
Email: sales@foodequipment.com.au
www.foodequipment.com.au




NZ Phone: 09 415 6470
Email: sales@fedproducts.co.nz
www.fedproducts.co.nz

FEATURES


- Slimmer glass door frame for maximum product visibility
 - Triple-glazed with heat film
 - Self-closing door
 - Natural and eco-friendly refrigerant
- Light box
 - Auto-defrost
 - 5 shelves on each door
 - LED lightening
- Digital temperature display
 - Fan force cooling
 - Castors



LG-400PF



LG-800PF



LG-400PF

Gross Capacity (L)	400
Net Capacity (L)	343
Weight (kg)	110
Temp.Range °C	-22 to -18
Ambient/RH%	25/60
Power (W/A)	800/10
Dimensions (WxDxH mm)	670x693x2008




LG-800PF

Gross Capacity (L)	800
Net Capacity (L)	684
Weight (kg)	189
Temp.Range °C	-22 to -18
Ambient/RH%	25/60
Power (W/A)	1500/10
Dimensions (WxDxH mm)	1220x693x2008



FEATURES

- Forced air circulation
 - Adjustable shelves
 - Interior LED lights
 - Powder coated interior
- Universal wheels
 - Double glazing tempered glass
 - Self closing doors
 - Door locks
- Self evaporating drip tray
 - Aluminium door frame & handle
 - Natural and eco-friendly refrigerant















LG-600GBM

LG-1000GBM

LG-1500GBM

LG-2200GBM



LG-600GBM

LG-1000GBM

Gross Capacity (L)	636	1117
Net Capacity (L)	579	1013
Weight (kg)	130	179
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	460/10	460/10
Dimensions (WxDxH mm)	750x740x2039	1253x740x2039



LG-1500GBM

LG-2200GBM

Gross Capacity (L)	1718	2319
Net Capacity (L)	1552	2092
Weight (kg)	207.5	360
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	700/10	920/10
Dimensions (WxDxH mm)	1880x740x2039	2508x740x2039



AUS Phone: 1300 659 409
Email: sales@foodequipment.com.au
www.foodequipment.com.au



NZ Phone: 09 415 6470
Email: sales@fedproducts.co.nz
www.fedproducts.co.nz

FEATURES

- Forced air circulation
 - Adjustable shelves
 - Interior LED lights
 - Powder coated interior
- Universal wheels
 - Triple glazing tempered glass
 - Self closing door
 - Door locks
- Self evaporating drip tray
 - Aluminium door frame & handle
 - Natural and eco-friendly refrigerant












LG-600GBMF/E



LG-1000GBMF / LG-1000GBMF/E



LG-1500GBMF / LG-1500GBMF/E



	LG-1000GBMF	LG-1500GBMF
Gross Capacity (L)	1043	1618
Net Capacity (L)	897	1382
Weight (kg)	240	305
Temp.Range °C	-22 to -18	-22 to -18
Ambient/RH%	25/60	25/60
Power (W/A)	1205/10	1580/10
Dimensions (WxDxH mm)	1253x760x2039	1880x760x2039

Lower Energy Consumption Range



LG-600GBMF/E



LG-1000GBMF/E



LG-1500GBMF/E

	LG-600GBMF/E	LG-1000GBMF/E	LG-1500GBMF/E
Gross Capacity (L)	580	1006	1563
Net Capacity (L)	390	897	1382
Weight (kg)	150	240	305
Temp.Range °C	-22 to -18	-22 to -18	-22 to -18
Ambient/RH%	25/60	25/60	25/60
Power (W/A)	600/10	1205/10	1280/10
Dimensions (WxDxH mm)	750x740x2039	1253x760x2039	1880x760x2039



AUS Phone: 1300 659 409
Email: sales@foodequipment.com.au
www.foodequipment.com.au



NZ Phone: 09 415 6470
Email: sales@fedproducts.co.nz
www.fedproducts.co.nz

FEATURES

- Forced circulation
 - Adjustable shelves
 - Interior LED lights
 - Powder coated interior
- Universal wheels
 - 2 layers external tempered glass
 - Self closing doors
 - Door locks
- Self evaporating drip tray
 - Aluminium door frame & handle
 - Natural and eco-friendly refrigerant



LG-600BGBM

LG-1000BGBM











Gross Capacity (L)	636	1117
Net Capacity (L)	579	1013
Weight (kg)	130	179
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	460/10	460/10
Dimensions (WxDxH mm)	750x740x2039	1253x740x2039

LG-600BGBM

LG-1000BGBM

LG-1500BGBM

LG-2200BGBM



LG-1500BGBM

LG-2200BGBM

Gross Capacity (L)	1718	2319
Net Capacity (L)	1552	2092
Weight (kg)	207.5	360
Temp.Range °C	+2 to +8	+2 to +8
Ambient/RH%	38/65	38/65
Power (W/A)	700/10	920/10
Dimensions (WxDxH mm)	1880x740x2039	2508x740x2039



AUS Phone: 1300 659 409
Email: sales@foodequipment.com.au
www.foodequipment.com.au



NZ Phone: 09 415 6470
Email: sales@fedproducts.co.nz
www.fedproducts.co.nz

FEATURES









- Forced air circulation
 - Adjustable shelves
 - Interior LED lights
 - Powder coated interior
- Universal wheels
 - 2 layers external tempered glass
 - Self closing doors
 - Door locks
- Self evaporating drip tray
 - Aluminium door frame & handle
 - Natural and eco-friendly refrigerant



LG-600BGBMF/E

LG-1000BGBMF / LG-1000BGBMF/E

LG-1500BGBMF / LG-1500BGBMF/E



		
	LG-1000BGBMF	LG-1500BGBMF
Gross Capacity (L)	1043	1618
Net Capacity (L)	897	1382
Weight (kg)	240	305
Temp.Range °C	-22 to -18	-22 to -18
Ambient/RH%	25/60	25/60
Power (W/A)	1205/10	1580/15
Dimensions (WxDxH mm)	1253x760x2039	1880x760x2039

Lower Energy Consumption Range

			
	LG-600BGBMF/E	LG-1000BGBMF/E	LG-1500BGBMF/E
Gross Capacity (L)	580	1006	1563
Net Capacity (L)	390	897	1382
Weight (kg)	150	240	304
Temp.Range °C	-22 to -18	-22 to -18	-22 to -18
Ambient/RH%	25/60	25/60	25/60
Power (W/A)	600/10	1205/10	1280/10
Dimensions (WxDxH mm)	750x740x2039	1253x760x2039	1880x760x2039



AUS Phone: 1300 659 409
Email: sales@foodequipment.com.au
www.foodequipment.com.au





NZ Phone: 09 415 6470
Email: sales@fedproducts.co.nz
www.fedproducts.co.nz

FEATURES



- Slim Aluminium glass door frame for better product presentation
 - Stainless steel inner bottom for hygienic food storage and easy maintenance
 - Illuminated LED light box for advertising
- Double glazing
 - Hinged self-closing tempered glass door
 - Streamlined operation
 - LED lighting in canopy and inside cabinet
- Frost free
 - Digital thermostat
 - Fan force cooling system
 - Top mount design
 - Natural and eco-friendly refrigerant





LG-1006D



LG-1563D



LG-2121D



LG-1006D

Gross Capacity (L)	1006
Net Capacity (L)	702
Weight (kg)	154
Temp.Range °C	+2 to +5
Ambient/RH%	32/60
Power (W/A)	450/10
Dimensions (WxDxH mm)	1253x760x2092



LG-1563D

Gross Capacity (L)	1563
Net Capacity (L)	1090
Weight (kg)	204
Temp.Range °C	+2 to +5
Ambient/RH%	32/60
Power (W/A)	820/15
Dimensions (WxDxH mm)	1880x760x2092



LG-2121D

Gross Capacity (L)	2121
Net Capacity (L)	TBA
Weight (kg)	320
Temp.Range °C	+2 to +5
Ambient/RH%	32/60
Power (W/A)	1150/10
Dimensions (WxDxH mm)	2508x760x2092

FEATURES

- Slim Aluminium glass door frame for better product presentation
 - Stainless steel inner bottom for hygienic food storage and easy maintenance
 - Illuminated LED light box for advertising
- 3 layer glass:inside layer tempering, middle layer Low-E glass and outside layer heating glass
 - Hinged self-closing door
 - Streamlined operation
 - Natural and eco-friendly refrigerant
- LED lighting in canopy and inside cabinet
 - Auto-Defrost
 - Digital thermostat
 - Fan force cooling system
 - Top mount desing



LG-1006DF










LG-1563DF

Gross Capacity (L)	1006	1563
Net Capacity (L)	702	1090
Weight (kg)	234	323
Temp.Range °C	-22 to -18	-22 to -18
Ambient/RH%	25/60	25/60
Power (kW/A)	1.226/15	1.85/15
Dimensions (WxDxH mm)	1253x750x2092	1880x750x2092

LG-1006DF / LG-1006DF/E

LG-1563DF / LG-1563DF/E

LG-2121DF/E



Lower Energy Consumption Range



LG-1006DF/E



LG-1563DF/E



LG-2121DF/E

Gross Capacity (L)	1006	1563	2121
Net Capacity (L)	702	1090	TBA
Weight (kg)	264	373	445
Temp.Range °C	-22 to -18	-22 to -18	-22 to -18
Ambient/RH%	25/60	25/60	25/60
Power (kW/A)	1.205/10	1.28/10	2.533/15
Dimensions (WxDxH mm)	1253x750x2092	1880x750x2092	2058x750x2092

