



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Bonvue CTA-246 Chilled Counter Top Cold Display – 975mm

Model / SKU: CTA-246

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4125/product/7724/>



Chilled Angled Counter-Top Food Display

CTA-246

The countertop display unit distinguishes itself in the market through its notably larger display area and an additional shelf, enabling businesses to prominently showcase a more diverse range of products.

KEY FEATURES



Eco-Friendly Efficiency

Uses natural R290 refrigerant, with a 9 star GEMS energy rating.



Enhanced Product Showcase

Large display area with an extra shelf for more space.



Precision Temperature Control

Digital temperature controller for accurate adjustments.



Automatic Defrost Function

Streamlines upkeep by preventing ice build-up.

DETAILS

Refrigerated countertop food displays feature temperature displays that ensure food safety by maintaining optimal temperatures, preventing spoilage and bacterial growth. These displays enhance customer trust, comply with health regulations, and contribute to energy savings. Additionally, they simplify management, ultimately boosting operational efficiency and customer satisfaction.





Brilliant
LED Lighting

Dual-sided LED lights create an attractive presentation of contents.



Extra Shelving
Advantage

Comes with three adjustable chrome-plated shelves, maximizing display variety.



Robust Glass
Insulation

All sides encased in double tempered glass for safety and thermal efficiency.



Reliable
Cooling System

Ventilating cooling ensures a consistently chilled environment.



Effective Condensation
Removal

Three-side airducts adeptly manage moisture , keeping the view unobstructed.



Convenient
Access

Rear sliding doors provide smooth restocking and service.

Structure and Parts



Double-layer
Tempered Glass


Chrome-plated Shelves

Dual-sided LED Light

Shelf Bracket

Digital Controller

Power Switch

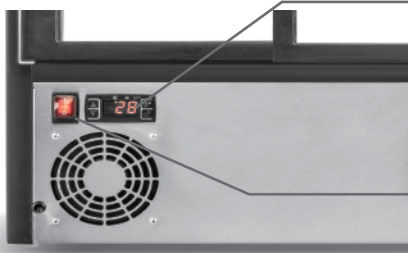


Code	GEMS Star Rating	Litre	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range °C	Ambient/ RH%	Power (W/A)
CTA-246	10	246	975x560x874	75	2 to 8	30 °C / 55%RH	215/10

SPEC SHEET

Chilled Angled Counter-Top Food Display CTA-246

This counter top display unit stands out in the market with its significantly larger display area and an extra shelf, allowing businesses to showcase a greater variety of products prominently.

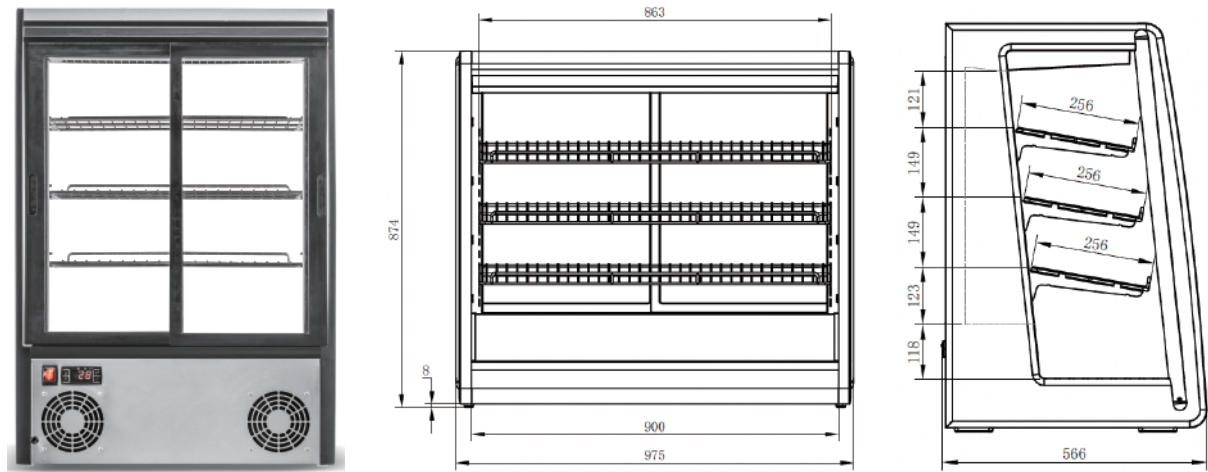

FEATURES AND FUNCTIONALITIES

Exterior & Interior of the Cabinet	Stainless Steel Body; Durable Slanted Front Glass
Glass Tempering Design	Double-layer tempered glass
Ergonomical Design	Adjustable Shelves with loading capacity 20kg per shelf; Insulated Sliding Rear Doors; Dual-sided LED Light

PERFORMANCE SPECIFICATION

Climate Class	4
Max. ambient temp./RH	30 °C, 55%RH
Temperature range	2~8 °C
Refrigerant	R290
Energy Efficiency kWh/24h	2.13
Rated kWh/year	777.5
Energy Efficiency Index (EEI)	11.8
Energy efficiency class	10

UNIT PHYSICAL QUALITY

Net Weight (kg)	75
Width (mm)	975
Depth (mm)	560
Height (mm)	874
Packing Width (mm)	1025
Packing Depth (mm)	630
Packing Height (mm)	950
Total Capacity (L)	246
Net Capacity (L)	136
Total display area (m²)	1.3

TECHNICAL DESCRIPTION

Power cord	10Amp plug and lead
Power cord length	2.4 m (2.3 m outside cabinet)
Power supply	220~240V/50HZ
Rated Current	1.5A
Interior lighting	2 side LED light
Defrost Design	Automatic Defrost
Cooling System	Ventilated cooling
Compressor Unit	Cubigel



IEC/IECEE CB;
IEC 60335-2-89:2019;
IEC 60335-1:2010 + A1:2013 + A2:2016



ISO23953-1:2015;
ISO23953-2:2015



GEMS Compliant
performance and energy
consumption standards



10
ENERGY
RATING

WARRANTY
1 Year Parts and Labour Warranty

