



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Sunmixer T9860-C-DF Double Glass Rinser Counter Top – 304 SS, Dual Station

Model / SKU: T9860-C-DF

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/2284/product/7740/>

Installation instruction

Model: 9860-C-DF Glass Rinser

When you open the product package , firstly, please check carefully the accessories according to following Part Number guide drawing. If you found any parts missing, please contact your local dealer or our factory soonest.

Attention: Be sure to read all the contents of this installation manual before installation

Part Number Guide		
		QUANTITY
1	Body	1
2	Plastic Hexagonal holder	1
3	Gasket	1
4	Strainer	1

*All diagram here are for reference only, specifications are subject to the physical products.

Technical data:

Product Name:

Glass Rinser

Media: Water

Safety pressure: 0.4Mpa

Hyper pressure scale: $\pm 10\%$

Working temperature: 85 °C

Execution standard:

Food grade CE certification

WRAS British Drinking Water Safety Certification

ACS French Health Certification

NSF American Certification

CQC China Product Certification

Install connection: G1/2"

Installing cautions:

A. Preference to installation with AS/NZS 3500.1, including the installation of any non-integral backflow prevention device.

B. This faucet has been professionally tested and adjusted, please do not disassemble and assemble by yourself.

C. Please clean the inlet pipe before installation, to avoid faucet clogged up, affect the normal water.

D. The size of deck mounting shall be subject to the A of the above diagram.


E. Please check the sealing condition of each joint after the installation, Important to make surer no leakage.

ZHEJIANG SUNMIXER SANITARY WARE CO.,LTD.


Add: Science & technology Industrial Zone,
Chumen, Yuhuan, Zhejiang, China

Http://www.pre-rinse.com E-mail: info@pre-rinse.com


Tel: +86-576-87121420 +86-576-81731911 Fax: +86-576-87121319

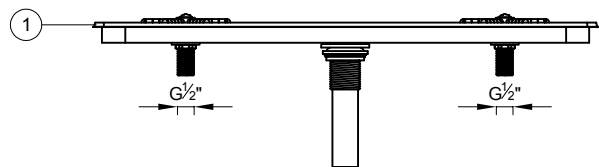


1. Taking the waste drain to connect with sink

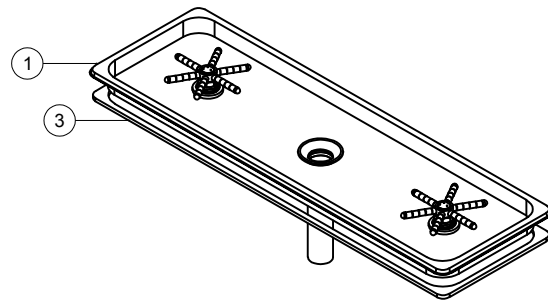

2. Put the rubber gasket under the sink groove

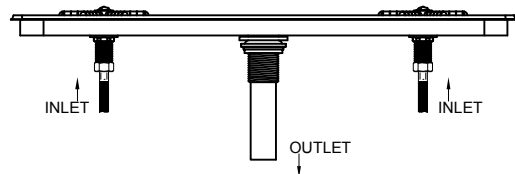

3. Connected with check valve, inlet and outlet flexible hose (The hoses are prepared by yourself)

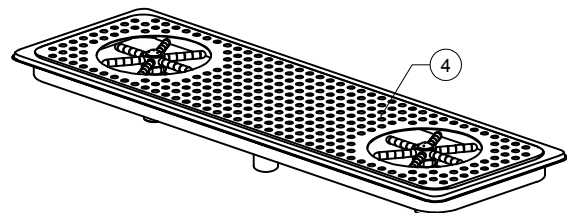

4. Put the strainer on the sink, and then installed it on the deck. It can be working after water connection

