



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**Thermaster MA400 Meat Aging Cabinet – 400L Dry Ager for Steak Maturation**

**Model / SKU: MA400**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.


Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4026/product/7829/>

# MEAT & SEAFOOD AGING CABINET

## MA400



The Meat & Seafood Aging Cabinet provides the ultimate environment for maturing meat and seafood, meeting the highest international standards. With multiple functions such as auto-defrost, auto-evaporation, salt brick, UVC sterilisation, and activated carbon air filtration, the unit can safely and cleanly mature the meat inside. The high-transparency insulated tempered glass door offers a clear view of the items, attracting customers.

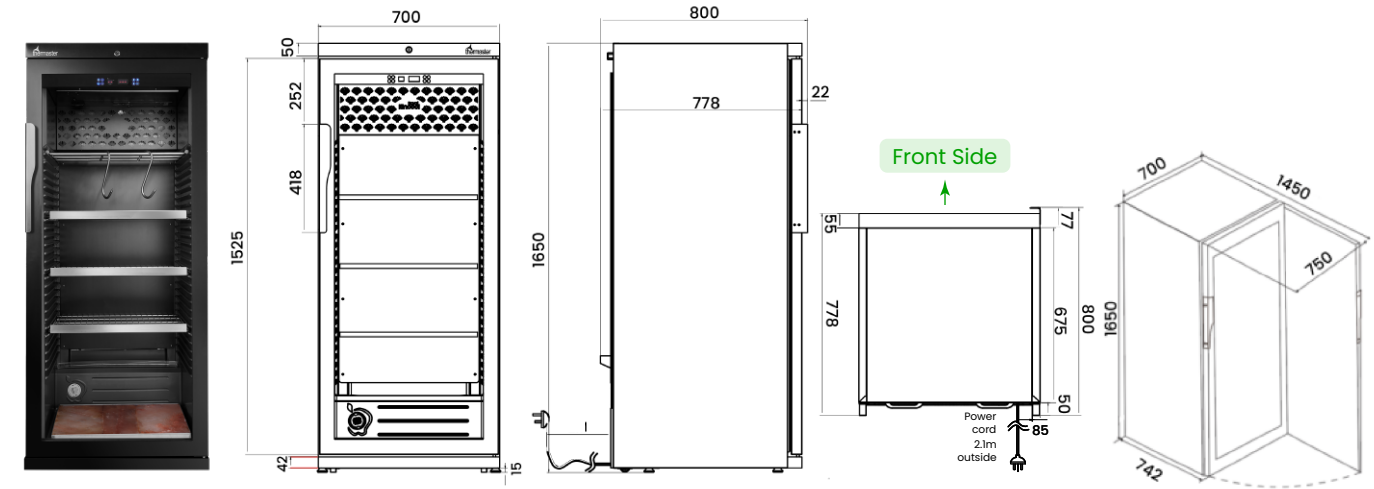

| FEATURES AND FUNCTIONS             |                                                                                                                                                   |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Cooling System                     | Fan Forced Cooling                                                                                                                                |
| Defrost System                     | Electric defrost with 54W defrost power input.                                                                                                    |
| Energy Consumption                 | 2.96 kWh/24h                                                                                                                                      |
| Exterior & Interior of the Cabinet | Exterior body black titanium AISI430 and interior plastic-dipped liner.                                                                           |
| Ergonomic Design                   | Lock and key, Digital controller, LED lights, 4 Support legs, Integrated Door Handle design.                                                      |
| Durable Door Profile               | Non-reversible door, Black titanium AISI430 frame and handle.                                                                                     |
| Location of Materials Parts        | Capacity 20kg per shelf,<br>1pc AISI304 Hanger<br>2pc S-Hook AISI304<br>3pc AISI304 Shelves<br>1pc Himalayan Salt Brick<br>1pc AISI304 Salt Tray. |
| Glass Design                       | High-transparent, film-heated, insulated, ultraviolet-proof, tempered double glass door.                                                          |

| TECHNICAL DESCRIPTION |                              |
|-----------------------|------------------------------|
| Power Cord            | 10Amp plug and lead          |
| Power Cord Length     | 2.4m (2.15m outside cabinet) |
| Power Supply          | 240V/50Hz, 160W              |
| Rated Current         | 0.8A                         |
| Evaporator Design     | Plate evaporator, 14Wx1 fan  |
| LED Lights            | 8W x 1 LED strip top middle  |

| WARRANTY                                                                                                   |  |
|------------------------------------------------------------------------------------------------------------|--|
| 2 Years Parts & Labour Plus 2 Years Parts Only Warranty When Products Registered Within 14 Days of Invoice |  |



| PHYSICAL QUALITIES      |      |
|-------------------------|------|
| Width (mm)              | 700  |
| Depth (mm)              | 800  |
| Height (mm)             | 1650 |
| Packing Width (mm)      | 770  |
| Packing Depth (mm)      | 840  |
| Packing Height (mm)     | 1860 |
| Net Weight (kg)         | 102  |
| Gross Capacity (L)      | 400  |
| Net Capacity (L)        | 300  |
| Total Display Area (m²) | 0.78 |

| PERFORMANCE SPECIFICATIONS      |              |
|---------------------------------|--------------|
| Max. ambient temp/RH            | 32°C 70%     |
| Climate Class                   | 3            |
| Temperature Range               | +1°C to +4°C |
| Rated kWh/year                  | 1080.4       |
| Refrigerant                     | R600a (80g)  |
| Energy Efficiency Index (EEI %) | 18.3         |
| Star Rating / GEMS Rating       | 8(3M2)       |

| SAFETY & STANDARDS                                                                                   |  |
|------------------------------------------------------------------------------------------------------|--|
| GEMS(Refrigerated Cabinets) Determination 2024;<br>CB; Globa-mark; ISO 23953; IEC 60335; AS/NZS60335 |  |

|                                         |                                      |                                                            |  |  |
|-----------------------------------------|--------------------------------------|------------------------------------------------------------|--|--|
|                                         |                                      |                                                            |  |  |
| IEC 60335-1:2010<br>IEC 60335-2-89:2019 | ISO 23953-1:2023<br>ISO 23953-2:2023 | AS/NZS 60335.2.89:2020;<br>AS/NZS 60335.1:2020 Amd 1: 2021 |  |  |