



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**Thermaster LG-600BGBM Single Door Supermarket Fridge – 614L, Black Finish**

**Model / SKU: LG-600BGBM**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4259/product/7835/>



THERMASTER LG SERIES

# The Benchmark in Beverage Refrigeration



**2 YEARS** PARTS & LABOUR PLUS **2 YEARS** PARTS ONLY WARRANTY  
WHEN PRODUCTS REGISTERED WITHIN 14 DAYS OF INVOICE





# Why Choose Thermaster?

Trusted across Australia's hospitality and retail industry, the Thermaster LG range delivers reliable performance, brilliant product visibility, and energy-efficient cooling.

Built for busy environments, each unit combines aesthetic presentation with durable commercial-grade components Ñ making it the professional's choice for dependable beverage display, day after day.



#### Proven Reliability

Trusted by professionals nationwide.



#### Superior Visibility

LED lighting and clear glass doors.



#### Energy Efficient

Fast, even cooling with low power use.



#### Built to Last

Durable, commercial-grade design.



#### Easy Maintenance


Simple to clean and service.





  
thermaster

FEATURES



- Digital temp. control & read-out
  - Forced air circulation
  - Evaporative drainage
  - Natural and eco-friendly refrigerant
- Interior LED lights
  - 4 castors, 2 with brakes
  - Double glazing tempered glass
  - 4 adjustable levels of shelving
- Self closing doors
  - 7 Star Energy Rating



LG-370P / LG-370BP



LG-540P / LG-540BP



LG-370P



LG-370BP

|                       |              |              |
|-----------------------|--------------|--------------|
| Gross Capacity (L)    | 370          | 370          |
| Net Capacity (L)      | 335          | 335          |
| Weight (kg)           | 72           | 72           |
| Temp.Range °C         | +2 to +8     | +2 to +8     |
| Ambient/RH%           | 38/65        | 38/65        |
| Power (W/A)           | 268/10       | 268/10       |
| Dimensions (WxDxH mm) | 610x610x1973 | 610x610x1973 |



LG-540P



LG-540BP

|                       |              |              |
|-----------------------|--------------|--------------|
| Gross Capacity (L)    | 530          | 530          |
| Net Capacity (L)      | 495          | 495          |
| Weight (kg)           | 83           | 83           |
| Temp.Range °C         | +2 to +8     | +2 to +8     |
| Ambient/RH%           | 38/65        | 38/65        |
| Power (W/A)           | 310/10       | 310/10       |
| Dimensions (WxDxH mm) | 700x690x2079 | 700x690x2079 |



AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)






NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)

FEATURES




- LED lighting
  - Digital temp. control & read-out
  - Fan-forced evaporator cooling
  - Self evaporating drainage
- Auto defrost
  - Castors
  - Double glazed doors
  - Self-closing doors with locks
- Light box
  - 4 shelves plus floor
  - Natural and eco-friendly refrigerant



LG-580P / LG-580BP



LG-730P / LG-730BP



LG-580P

|                       |              |
|-----------------------|--------------|
| Gross Capacity (L)    | 568          |
| Net Capacity (L)      | 487          |
| Weight (kg)           | 96.5         |
| Temp.Range °C         | +2 to +8     |
| Ambient/RH%           | 38/65        |
| Power (W/A)           | 349/10       |
| Dimensions (WxDxH mm) | 880x610x1973 |



LG-580BP

|                       |              |
|-----------------------|--------------|
| Gross Capacity (L)    | 568          |
| Net Capacity (L)      | 487          |
| Weight (kg)           | 96.5         |
| Temp.Range °C         | +2 to +8     |
| Ambient/RH%           | 38/65        |
| Power (W/A)           | 349/10       |
| Dimensions (WxDxH mm) | 880x610x1973 |



LG-730P

|                       |               |
|-----------------------|---------------|
| Gross Capacity (L)    | 730           |
| Net Capacity (L)      | 670           |
| Weight (kg)           | 113           |
| Temp.Range °C         | +2 to +8      |
| Ambient/RH%           | 38/65         |
| Power (W/A)           | 450/10        |
| Dimensions (WxDxH mm) | 1120x610x1973 |



LG-730BP

|                       |               |
|-----------------------|---------------|
| Gross Capacity (L)    | 730           |
| Net Capacity (L)      | 670           |
| Weight (kg)           | 113           |
| Temp.Range °C         | +2 to +8      |
| Ambient/RH%           | 38/65         |
| Power (W/A)           | 450/10        |
| Dimensions (WxDxH mm) | 1120x610x1973 |



FEATURES



- LED lighting
  - Embraco compressor
  - Digital temp. control & read-out
  - Fan-forced evaporator cooling
- Self evaporating drainage
  - Auto defrost
  - Castors
  - Double glazed doors
- Self-closing doors with locks
  - Light box
  - 5 levels of display
  - Natural and eco-friendly refrigerant



LG-1000P / LG-1000BP / LG-1000SDBP



LG-1200P / LG-1200BP

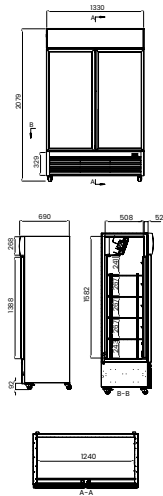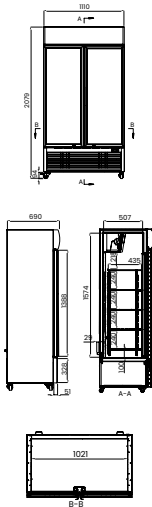

LG-1000P                      LG-1000BP                      LG-1000SDBP

|                       |               |               |               |
|-----------------------|---------------|---------------|---------------|
| Gross Capacity (L)    | 885           | 885           | 862           |
| Net Capacity (L)      | 825           | 825           | 803           |
| Weight (kg)           | 123           | 123           | 126           |
| Temp.Range °C         | +2 to +8      | +2 to +8      | +2 to +8      |
| Ambient/RH%           | 38/65         | 38/65         | 38/65         |
| Power (W/A)           | 470/10        | 470/10        | 470/10        |
| Dimensions (WxDxH mm) | 1110x690x2079 | 1110x690x2079 | 1110x690x2079 |



LG-1200P                      LG-1200BP

|                       |               |               |
|-----------------------|---------------|---------------|
| Gross Capacity (L)    | 1075          | 1075          |
| Net Capacity (L)      | 1000          | 1000          |
| Weight (kg)           | 132           | 132           |
| Temp.Range °C         | +2 to +8      | +2 to +8      |
| Ambient/RH%           | 38/65         | 38/65         |
| Power (W/A)           | 480/10        | 480/10        |
| Dimensions (WxDxH mm) | 1330x690x2079 | 1330x690x2079 |



AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)



NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)

FEATURES

- Illuminated canopy
  - LED lighting
  - Easy adjustable shelves
  - Self-closing glass door
  - External door handle
- 2 layer tempered door glass
  - White powder coated steel plate
  - Automatic defrost and condensate evaporation
  - Lock & key
- Natural and eco-friendly refrigerant
  - Heavy duty castors with brake
  - Digital Temperature controller
  - 12 Shelves



LG-1203P

|                       |               |
|-----------------------|---------------|
| Gross Capacity (L)    | 1065          |
| Net Capacity (L)      | 975           |
| Weight (kg)           | 157           |
| Temp.Range °C         | +2 to +8      |
| Ambient/RH%           | 38/65         |
| Power (W/A)           | 555/10        |
| Dimensions (WxDxH mm) | 1600x610x1973 |

LG-1203P




LG-1203BP



LG-1203BP

|                       |               |
|-----------------------|---------------|
| Gross Capacity (L)    | 1065          |
| Net Capacity (L)      | 975           |
| Weight (kg)           | 157           |
| Temp.Range °C         | +2 to +8      |
| Ambient/RH%           | 38/65         |
| Power (W/A)           | 555/10        |
| Dimensions (WxDxH mm) | 1600x610x1973 |

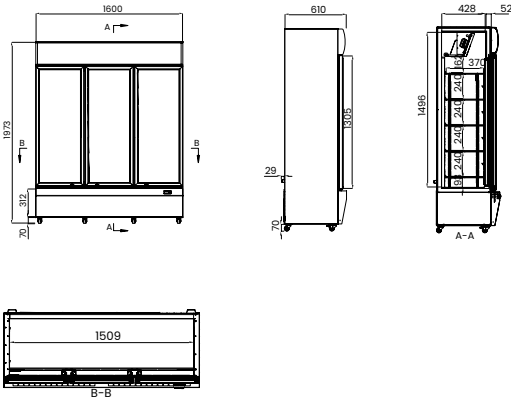

AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)



NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)






FEATURES




- Slimmer glass door frame for maximum product visibility
  - Triple-glazed with heat film
  - Self-closing door
  - Natural and eco-friendly refrigerant
- Light box
  - Auto-defrost
  - 5 shelves on each door
  - LED lightening
- Digital temperature display
  - Fan force cooling
  - Castors



LG-400PF



LG-800PF



LG-400PF

|                       |              |
|-----------------------|--------------|
| Gross Capacity (L)    | 400          |
| Net Capacity (L)      | 343          |
| Weight (kg)           | 110          |
| Temp.Range °C         | -22 to -18   |
| Ambient/RH%           | 25/60        |
| Power (W/A)           | 800/10       |
| Dimensions (WxDxH mm) | 670x693x2008 |




LG-800PF

|                       |               |
|-----------------------|---------------|
| Gross Capacity (L)    | 800           |
| Net Capacity (L)      | 684           |
| Weight (kg)           | 189           |
| Temp.Range °C         | -22 to -18    |
| Ambient/RH%           | 25/60         |
| Power (W/A)           | 1500/10       |
| Dimensions (WxDxH mm) | 1220x693x2008 |



FEATURES

- Forced air circulation
  - Adjustable shelves
  - Interior LED lights
  - Powder coated interior
- Universal wheels
  - Double glazing tempered glass
  - Self closing doors
  - Door locks
- Self evaporating drip tray
  - Aluminium door frame & handle
  - Natural and eco-friendly refrigerant















LG-600GBM

LG-1000GBM

LG-1500GBM

LG-2200GBM



|                       |                                                                                     |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |  |  |
|                       | LG-600GBM                                                                           | LG-1000GBM                                                                          |
| Gross Capacity (L)    | 636                                                                                 | 1117                                                                                |
| Net Capacity (L)      | 579                                                                                 | 1013                                                                                |
| Weight (kg)           | 130                                                                                 | 179                                                                                 |
| Temp.Range °C         | +2 to +8                                                                            | +2 to +8                                                                            |
| Ambient/RH%           | 38/65                                                                               | 38/65                                                                               |
| Power (W/A)           | 460/10                                                                              | 460/10                                                                              |
| Dimensions (WxDxH mm) | 750x740x2039                                                                        | 1253x740x2039                                                                       |

|                       |                                                                                     |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |  |  |
|                       | LG-1500GBM                                                                          | LG-2200GBM                                                                          |
| Gross Capacity (L)    | 1718                                                                                | 2319                                                                                |
| Net Capacity (L)      | 1552                                                                                | 2092                                                                                |
| Weight (kg)           | 207.5                                                                               | 360                                                                                 |
| Temp.Range °C         | +2 to +8                                                                            | +2 to +8                                                                            |
| Ambient/RH%           | 38/65                                                                               | 38/65                                                                               |
| Power (W/A)           | 700/10                                                                              | 920/10                                                                              |
| Dimensions (WxDxH mm) | 1880x740x2039                                                                       | 2508x740x2039                                                                       |



AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)



NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)

FEATURES

- Forced air circulation
  - Adjustable shelves
  - Interior LED lights
  - Powder coated interior
- Universal wheels
  - Triple glazing tempered glass
  - Self closing door
  - Door locks
- Self evaporating drip tray
  - Aluminium door frame & handle
  - Natural and eco-friendly refrigerant












LG-600GBMF/E



LG-1000GBMF / LG-1000GBMF/E



LG-1500GBMF / LG-1500GBMF/E



|                       |                                                                                     |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |  |  |
|                       | LG-1000GBMF                                                                         | LG-1500GBMF                                                                         |
| Gross Capacity (L)    | 1043                                                                                | 1618                                                                                |
| Net Capacity (L)      | 897                                                                                 | 1382                                                                                |
| Weight (kg)           | 240                                                                                 | 305                                                                                 |
| Temp.Range °C         | -22 to -18                                                                          | -22 to -18                                                                          |
| Ambient/RH%           | 25/60                                                                               | 25/60                                                                               |
| Power (W/A)           | 1205/10                                                                             | 1580/10                                                                             |
| Dimensions (WxDxH mm) | 1253x760x2039                                                                       | 1880x760x2039                                                                       |

Lower Energy Consumption Range



LG-600GBMF/E



LG-1000GBMF/E



LG-1500GBMF/E

|                       |              |               |               |
|-----------------------|--------------|---------------|---------------|
|                       | LG-600GBMF/E | LG-1000GBMF/E | LG-1500GBMF/E |
| Gross Capacity (L)    | 580          | 1006          | 1563          |
| Net Capacity (L)      | 390          | 897           | 1382          |
| Weight (kg)           | 150          | 240           | 305           |
| Temp.Range °C         | -22 to -18   | -22 to -18    | -22 to -18    |
| Ambient/RH%           | 25/60        | 25/60         | 25/60         |
| Power (W/A)           | 600/10       | 1205/10       | 1280/10       |
| Dimensions (WxDxH mm) | 750x740x2039 | 1253x760x2039 | 1880x760x2039 |



AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)



NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)

FEATURES

- Forced circulation
  - Adjustable shelves
  - Interior LED lights
  - Powder coated interior
- Universal wheels
  - 2 layers external tempered glass
  - Self closing doors
  - Door locks
- Self evaporating drip tray
  - Aluminium door frame & handle
  - Natural and eco-friendly refrigerant



LG-600BGBM

LG-1000BGBM











|                       |              |               |
|-----------------------|--------------|---------------|
| Gross Capacity (L)    | 636          | 1117          |
| Net Capacity (L)      | 579          | 1013          |
| Weight (kg)           | 130          | 179           |
| Temp.Range °C         | +2 to +8     | +2 to +8      |
| Ambient/RH%           | 38/65        | 38/65         |
| Power (W/A)           | 460/10       | 460/10        |
| Dimensions (WxDxH mm) | 750x740x2039 | 1253x740x2039 |

LG-600BGBM

LG-1000BGBM

LG-1500BGBM

LG-2200BGBM



LG-1500BGBM

LG-2200BGBM

|                       |               |               |
|-----------------------|---------------|---------------|
| Gross Capacity (L)    | 1718          | 2319          |
| Net Capacity (L)      | 1552          | 2092          |
| Weight (kg)           | 207.5         | 360           |
| Temp.Range °C         | +2 to +8      | +2 to +8      |
| Ambient/RH%           | 38/65         | 38/65         |
| Power (W/A)           | 700/10        | 920/10        |
| Dimensions (WxDxH mm) | 1880x740x2039 | 2508x740x2039 |



AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)



NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)

FEATURES










- Forced air circulation
  - Adjustable shelves
  - Interior LED lights
  - Powder coated interior
- Universal wheels
  - 2 layers external tempered glass
  - Self closing doors
  - Door locks
- Self evaporating drip tray
  - Aluminium door frame & handle
  - Natural and eco-friendly refrigerant



LG-600BGBMF/E

LG-1000BGBMF / LG-1000BGBMF/E

LG-1500BGBMF / LG-1500BGBMF/E



|                       |               |               |
|-----------------------|---------------|---------------|
|                       |               |               |
|                       | LG-1000BGBMF  | LG-1500BGBMF  |
| Gross Capacity (L)    | 1043          | 1618          |
| Net Capacity (L)      | 897           | 1382          |
| Weight (kg)           | 240           | 305           |
| Temp.Range °C         | -22 to -18    | -22 to -18    |
| Ambient/RH%           | 25/60         | 25/60         |
| Power (W/A)           | 1205/10       | 1580/15       |
| Dimensions (WxDxH mm) | 1253x760x2039 | 1880x760x2039 |

Lower Energy Consumption Range

|                       |               |                |                |
|-----------------------|---------------|----------------|----------------|
|                       |               |                |                |
|                       | LG-600BGBMF/E | LG-1000BGBMF/E | LG-1500BGBMF/E |
| Gross Capacity (L)    | 580           | 1006           | 1563           |
| Net Capacity (L)      | 390           | 897            | 1382           |
| Weight (kg)           | 150           | 240            | 304            |
| Temp.Range °C         | -22 to -18    | -22 to -18     | -22 to -18     |
| Ambient/RH%           | 25/60         | 25/60          | 25/60          |
| Power (W/A)           | 600/10        | 1205/10        | 1280/10        |
| Dimensions (WxDxH mm) | 750x740x2039  | 1253x760x2039  | 1880x760x2039  |



AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)



NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)





FEATURES



- Slim Aluminium glass door frame for better product presentation
  - Stainless steel inner bottom for hygienic food storage and easy maintenance
  - Illuminated LED light box for advertising
- Double glazing
  - Hinged self-closing tempered glass door
  - Streamlined operation
  - LED lighting in canopy and inside cabinet
- Frost free
  - Digital thermostat
  - Fan force cooling system
  - Top mount design
  - Natural and eco-friendly refrigerant





LG-1006D



LG-1563D



LG-2121D



LG-1006D

|                       |               |
|-----------------------|---------------|
| Gross Capacity (L)    | 1006          |
| Net Capacity (L)      | 702           |
| Weight (kg)           | 154           |
| Temp.Range °C         | +2 to +5      |
| Ambient/RH%           | 32/60         |
| Power (W/A)           | 450/10        |
| Dimensions (WxDxH mm) | 1253x760x2092 |



LG-1563D

|                       |               |
|-----------------------|---------------|
| Gross Capacity (L)    | 1563          |
| Net Capacity (L)      | 1090          |
| Weight (kg)           | 204           |
| Temp.Range °C         | +2 to +5      |
| Ambient/RH%           | 32/60         |
| Power (W/A)           | 820/15        |
| Dimensions (WxDxH mm) | 1880x760x2092 |



LG-2121D

|                       |               |
|-----------------------|---------------|
| Gross Capacity (L)    | 2121          |
| Net Capacity (L)      | TBA           |
| Weight (kg)           | 320           |
| Temp.Range °C         | +2 to +5      |
| Ambient/RH%           | 32/60         |
| Power (W/A)           | 1150/10       |
| Dimensions (WxDxH mm) | 2508x760x2092 |



AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)



NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)

FEATURES









- Slim Aluminium glass door frame for better product presentation
  - Stainless steel inner bottom for hygienic food storage and easy maintenance
  - Illuminated LED light box for advertising
- 3 layer glass:inside layer tempering, middle layer Low-E glass and outside layer heating glass
  - Hinged self-closing door
  - Streamlined operation
  - Natural and eco-friendly refrigerant
- LED lighting in canopy and inside cabinet
  - Auto-Defrost
  - Digital thermostat
  - Fan force cooling system
  - Top mount desing



LG-1006DF / LG-1006DF/E

LG-1563DF / LG-1563DF/E

LG-2121DF/E



|                       |                                                                                     |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |  |  |
|                       | LG-1006DF                                                                           | LG-1563DF                                                                           |
| Gross Capacity (L)    | 1006                                                                                | 1563                                                                                |
| Net Capacity (L)      | 702                                                                                 | 1090                                                                                |
| Weight (kg)           | 234                                                                                 | 323                                                                                 |
| Temp.Range °C         | -22 to -18                                                                          | -22 to -18                                                                          |
| Ambient/RH%           | 25/60                                                                               | 25/60                                                                               |
| Power (kW/A)          | 1.226/15                                                                            | 1.85/15                                                                             |
| Dimensions (WxDxH mm) | 1253x750x2092                                                                       | 1880x750x2092                                                                       |

Lower Energy Consumption Range

|                       |                                                                                     |                                                                                     |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |  |  |  |
|                       | LG-1006DF/E                                                                         | LG-1563DF/E                                                                         | LG-2121DF/E                                                                         |
| Gross Capacity (L)    | 1006                                                                                | 1563                                                                                | 2121                                                                                |
| Net Capacity (L)      | 702                                                                                 | 1090                                                                                | TBA                                                                                 |
| Weight (kg)           | 264                                                                                 | 373                                                                                 | 445                                                                                 |
| Temp.Range °C         | -22 to -18                                                                          | -22 to -18                                                                          | -22 to -18                                                                          |
| Ambient/RH%           | 25/60                                                                               | 25/60                                                                               | 25/60                                                                               |
| Power (kW/A)          | 1.205/10                                                                            | 1.28/10                                                                             | 2.533/15                                                                            |
| Dimensions (WxDxH mm) | 1253x750x2092                                                                       | 1880x750x2092                                                                       | 2058x750x2092                                                                       |



AUS Phone: 1300 659 409  
Email: [sales@foodequipment.com.au](mailto:sales@foodequipment.com.au)  
[www.foodequipment.com.au](http://www.foodequipment.com.au)



NZ Phone: 09 415 6470  
Email: [sales@fedproducts.co.nz](mailto:sales@fedproducts.co.nz)  
[www.fedproducts.co.nz](http://www.fedproducts.co.nz)