



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Fagor FT-E705L Kore 700 Bench Top Electric Griddle – 400 mm 5 kW

Model / SKU: FT-E705L

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/2592/product/8181/>



Catalogue
FOOD SERVICE
Chapter
COOKING

Model
FT-E705 L 400V 3N

19058922

09/03/2020

ELECTRIC FRY-TOP, FT-E705 L


- Deep-drawn surface tops manufactured in 1.5 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- 12 or 15 mm thick mild steel fry tops which are quick-heating and high power.
- Whole-module fry tops have two separate heating areas.
- Rapid reaction and recovery times of the fry-top temperature.
- The fry tops are welded to the deep-drawn surface top.
- The deep-drawn shell and its rounded edges and corners make cleaning much easier.
- The fry top is tilted towards the front to make it easier to collect grease and liquids.
- Fitted with an opening to collect cooking grease and a tray to store it which has capacity to store up to 2 litres depending on the model.
- Optional anti-splash side and rear guards, easy to remove.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.
- Machines with IPX5 grade water protection.
- Electrically heated models with stainless steel heating elements; thermostatic temperature control, between 100 and 300 °C.
- Safety thermostat.
- Model with smooth plate of 328 x 468 mm.
- Single heating zone.

OPTIONAL ACCESSORIES

- Scraper (The models with a chrome surface include the scraper as standard.).
- Anti-splash guard (in three parts to make cleaning easier).
- "
- "

DIMENSIONS

X Width	400 mm	X Gross width	440 mm
Y Depth	730 mm	Y Gross depth	822 mm
Z Height	290 mm	Z Gross height	535 mm
Net Weight	70,0 kg	Gross Weight	83,0 kg
Net volume	0,080 m3	Gross volume	0,193 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	5,000 kW
Amperage (A)	7,3A
Heating power	5,00 kW
Voltage	400V - 3N
Electric frequency	50/60Hz


CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	3X2,5MM2+T
Single-phase 230V wiring	2X4MM2+T
Three-phase +N 400V wiring	3X1,5MM2+T+N




www.fagorindustrial.com

FT-E705

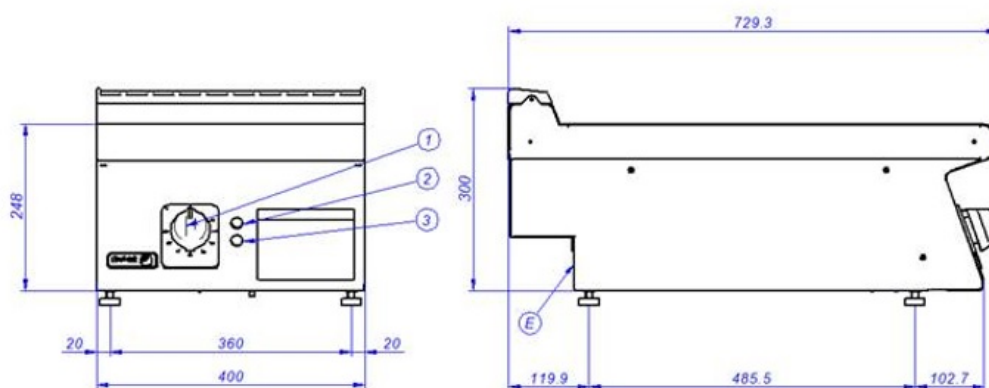

FT-E710

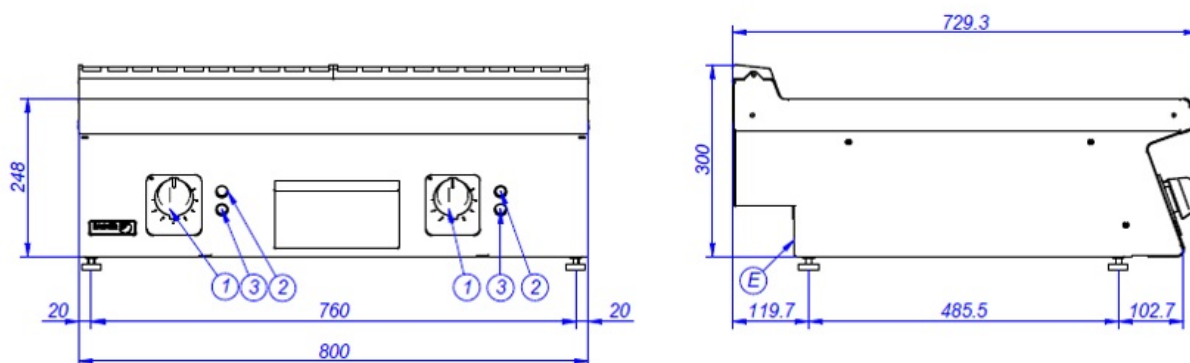

E – Conexión eléctrica
1 – Mando termostato
2 – Piloto verde
3 – Piloto ámbar

Electrical connection
Thermostat control
Green pilot
Ambar pilot

Connexion électrique
Commande de thermostat
Lumière verte
Lumière ambre