



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

## Fagor Kore 700 Fryer – Dual 15L Tanks, High-Efficiency – F-E7215

**Model / SKU: F-E7215**

### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/2605/product/8186/>



Catalogue  
FOOD SERVICE  
Chapter  
COOKING

Model  
F-E7215 400V 3N 50/60Hz 2C

1907145509/03/2020

ELECTRIC FRYER, F-E7215

- Surface top manufactured in 1.5 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- Well built into the surface top with robotic welding and polishing.
- Cold area in the lower part of the well which helps to preserve the characteristics and quality of the oil used for longer.
- Thermostatic temperature control, between 60 and 200 °C.
- Safety thermostat in all models.
- Fitted with individual lids for each well.
- Drainage of oil from the well through a mechanical ball valve which is robust, reliable and resistant to high temperatures.
- High power machine that heat up quickly and have a high power - litre ratio (up to 1.00 kW/litre).
- Electric model with AISI 304 stainless steel heating elements located inside the well which can be tilted by over 90° to ensure perfect cleaning.
- Number of wells: two of 15 litres capacity

BASKETS PROVIDED:


- 1 large basket per well (250 x 280 x 100 mm).

OPCIONAL ACCESSORIES

- Small basket (125 x 280 x 100 mm).
- "
- "

DIMENSIONS

|            |          |                |          |
|------------|----------|----------------|----------|
| X Width    | 800 mm   | X Gross width  | 840 mm   |
| Y Depth    | 730 mm   | Y Gross depth  | 822 mm   |
| Z Height   | 850 mm   | Z Gross height | 1255 mm  |
| Net Weight | 120,0 kg | Gross Weight   | 138,0 kg |
| Net volume | 0,500 m3 | Gross volume   | 0,867 m3 |



ELECTRICITY TECHNICAL SPECIFICATIONS

|                    |           |
|--------------------|-----------|
| Electric power     | 24,000 kW |
| Amperage (A)       | 34,8A     |
| Heating power      | 24,00 kW  |
| Voltage            | 400V - 3N |
| Electric frequency | 50/60Hz   |


CONNECTIONS TECHNICAL SPECIFICATIONS

|                            |            |
|----------------------------|------------|
| 230 V three-phase wiring   | 3X16MM2+T  |
| Single-phase 230V wiring   | 2X35MM2+T  |
| Three-phase +N 400V wiring | 3X6MM2+T+N |





www.fagorindustrial.com

**F-E7115**

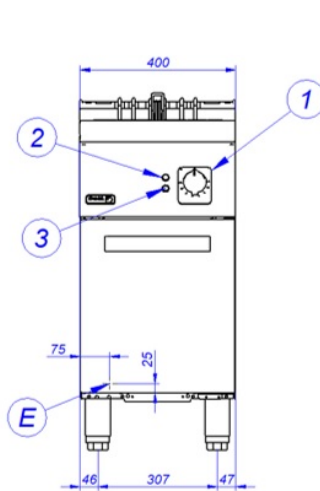

**F-E7215**

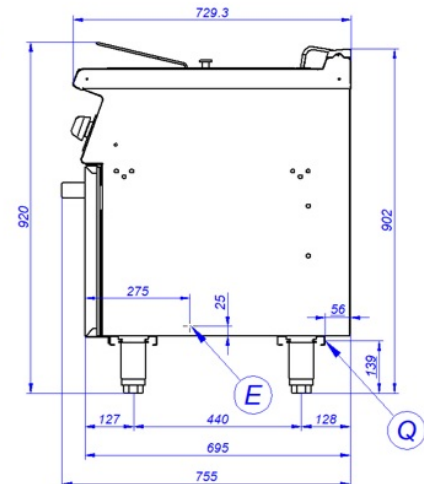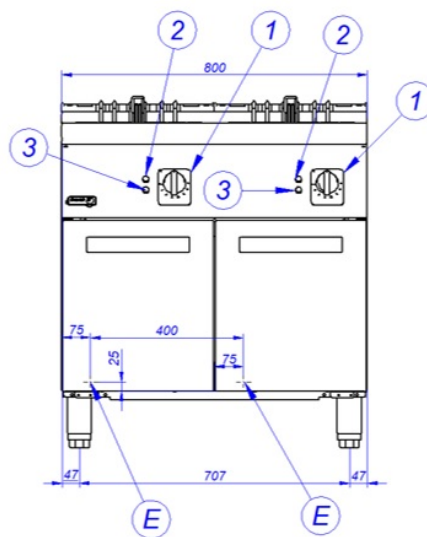

E – Conexión eléctrica  
Q – Conexión equipotencial  
1 – Mando termostato  
2 – Piloto verde  
3 – Piloto ámbar  
4 – Mando entrada agua

Electrical connection  
Equipotential connection  
Thermostat control  
Green pilot  
Amber pilot  
Water control

Connexion électrique  
Connexion équipotentiel  
Commande de thermostat  
Lumière verte  
Lumière ambre  
Commande d'entrée d'eau