



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

FED-X XURC1410G2V Double Glass Door Upright Fridge | 1410L

Model / SKU: XURC1410G2V

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE


The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/3941/product/5227/>

GLASS TWO DOOR UPRIGHT FRIDGE

XURC1410G2V

Two full glass door upright fridge features a stainless steel interior and exterior with rounded corners for easy cleaning, and it has an automatic defrost function. Inside, there are three levels of shelving plus a base, with each shelf capable of holding up to 40kg. The self-closing lockable doors come with heavy-duty magnetic seals. It is insulated with HFCs and CFCs free foam and tropicalised for Australian conditions. User-friendly digital controls and internal lighting are included. Equipped with heavy-duty castors with front wheel brakes for easy movement.

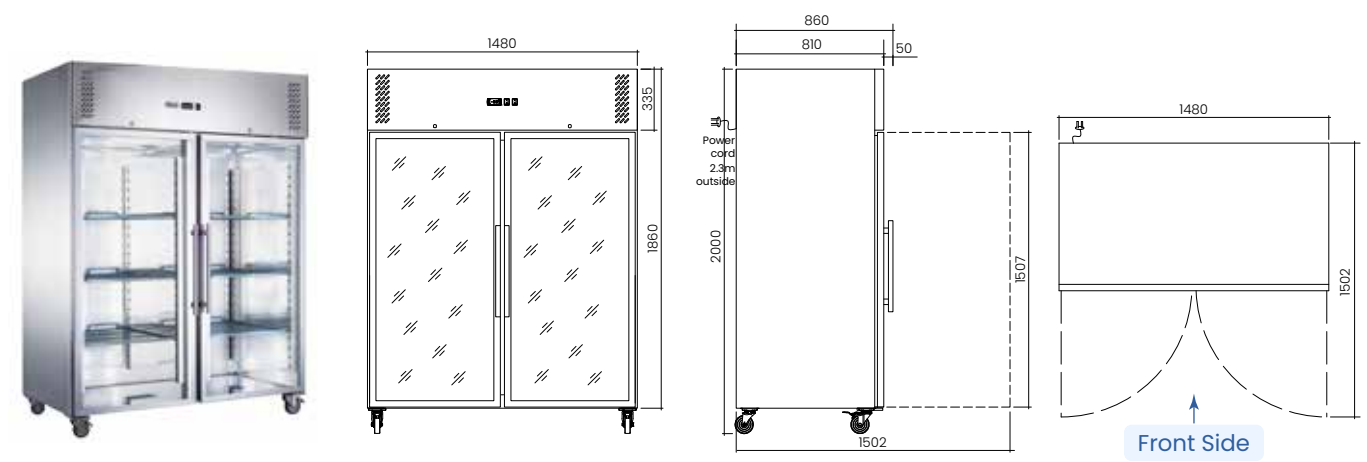

FEATURES AND FUNCTIONS

Cooling System	Fan Forced Cooling
Energy Consumption	4.356 kWh/24h
Exterior & Interior of the Cabinet	AISI 201 Stainless steel interior and exterior with rounded corners for easy cleaning.
Ergonomic Design	Stainless steel grip handle Heavy-duty castors with front-wheel brakes, User-friendly Digital controls and internal lighting Back stopper.
Durable Door Profile	Self-closing lockable doors with heavy-duty magnetic door seals.
Shelves	Plastic coating steel, 534x550mm Weight loading per shelf: 40kg
Total Display Area [m²]	2.97
Ventilation (mm)	Top/Sides/Rear : 50mm

TECHNICAL DESCRIPTION

Power Cord	10Amp plug and lead
Power cord length	3m (2.3m outside cabinet)
Power Supply	240V/50Hz, 415W
Rated Current	2.4A

SAFETY & STANDARDS

CE MD EMC Greenhouse and Energy Minimum Standards (Refrigerated Cabinets) Determination 2020 Determination
EN60335; EN62233:2008; EN 16825; EN IEC 55014; 61000;

To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.

PHYSICAL QUALITIES

Width (mm)	1480
Depth (mm)	830+30(Back Stopper)
Height (mm)	2000
Packing Width (mm)	1505
Packing Depth (mm)	855
Packing Height (mm)	2070
Net Weight (kg)	208
Gross Capacity (L)	1410
Net Capacity (L)	960

PERFORMANCE SPECIFICATIONS

Max. ambient temp/RH	38°C 60%
Climate Class	4
Temperature Range	+2°C to +8°C
Rated kWh/year	2186.28
Refrigerant	R290 (105g)
Energy Efficiency Index (EEI %)	72.79
Star Rating / GEMS Rating	3 (4MI)

WARRANTY
2 Years Parts & Labour Plus 2 Years Parts Only Warranty
When Products Registered Within 14 Days of Invoice




EN 60335
EN 62233:2008
EN 16825


EN IEC 55014
EN IEC 61000


ENERGY RATING
3


GEMS Compliant
greenhouse and energy minimum standards