



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Woodson WR.CFS23 Cold Food Display – 3 Bay Straight Glass Fridge

Model / SKU: WR.CFS23


KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /home/sarah/kw_system/07_Content_Library/product_db/supplier raw data/stoddart_extracted/16_Woodson/Data Sheets/

Product Information

- Exceptional value for money cold food display in a traditional straight profile
- Double glazed toughened glass front and sides for improved performance and efficiency
- Refrigerated by a 90mm deep cold plate well with cross fin coil over
- Adjustable digital controller designed to hold temperature accurately between 2°C and 5°C
- Rear toughened glass roller doors as standard
- Top mounted LED light for illuminated interior
- Insulated tank with double skin stainless steel construction
- Undermount refrigeration unit supplied with drain hose for connection to waste
- Designed to operate at ambient temperatures up to 32°C
- Takes gastronorm pans up to 65mm deep (sold separately)
- Other pan sizes and combinations available
- Available in a range of sizes from 3-6 modules
- Available in a variety of profiles, with matching hot food displays
- Wide range of functional accessories available
- **12-month onsite warranty**




Note:

- All Woodson units are designed for use with Woodson pans. Other suppliers pans may fit, however this is not guaranteed.
- Cabinets require ventilation for built in cold displays
- Optional trolley and panels sold separately

Specifications

Model	WR.CFS23	WR.CFS24	WR.CFS25	WR.CFS26
W x D x H (mm)	1030 x 600 x 690	1355 x 600 x 690	1680 x 600 x 690	2005 x 600 x 690
Gas	R134a	R134a	R134a	R134a
Total Connected Load	0.6kW	0.72kW	0.84kW	0.84kW
Electrical Connection	240VAC / 50Hz (10A plug & lead)	240VAC / 50Hz (10A plug & lead)	240VAC / 50Hz (10A plug & lead)	240VAC / 50Hz (10A plug & lead)

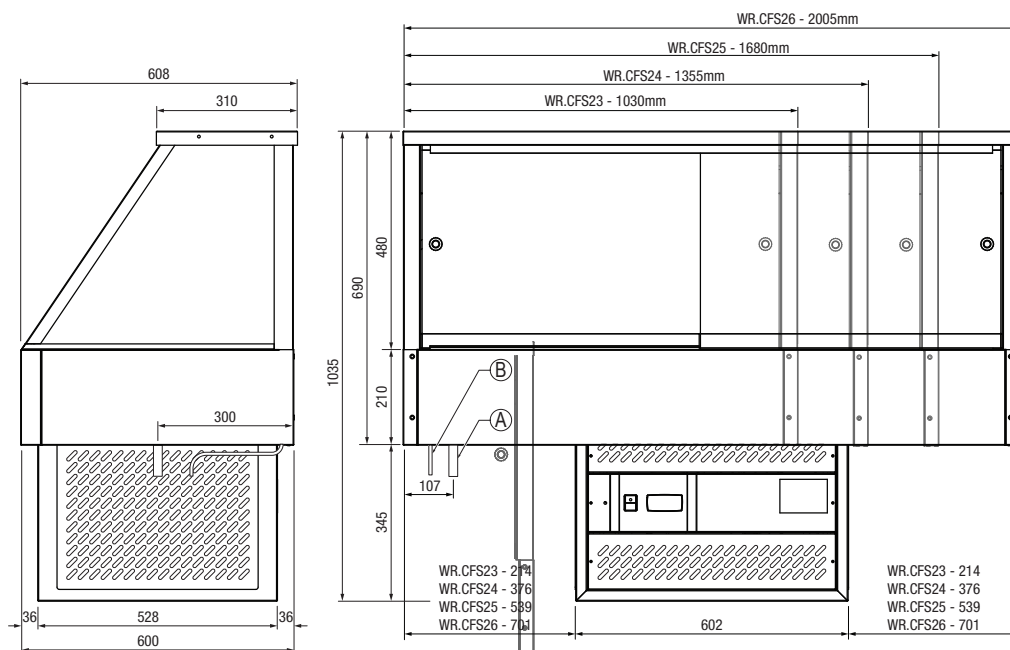

www.stoddart.com.au

www.stoddart.co.nz

Revision: A - 06/12/2024 - 05

Due to continuous product research and development,
the information contained herein is subject to change without notice.

