



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Anets FDAGG214R Goldenfry 2 Fryer System – 38L, Self-Oil Filter

Model / SKU: FDAGG214R

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

fdagg214r b2 datasheet

SKU: FDAGG214R

Distributed by KW Commercial - kwcommercial.com.au

Manufacturer documentation - (c) Anets

Retrieved: 2026-07-08

<https://www.kwcommercial.com.au/product/anets-fdagg214r-goldenfry-2-fryer-filter-drawer-system-with-millivo>



The Anets Goldenfry range now includes a wide variety of tube fryers using the inverted burner design to deliver efficiency and fast recovery.

Product Information:

- Goldenfry tube fryer filter systems come standard with AGG14R 4 gas tube millivolt control fryers banked together
- Millivolt control - 2 fryer filter drawer system
- Easy two step filtering
- 30 litre per minute filter pump for fast refill times
- Self aligning filter connection for effortless hookup
- Rear oil return for bottom cleaning
- Filter pan is stainless with rear wheels for easy handling
- Filter pan lid is self storing and out of the way
- All filtration systems come standard on adjustable height castors, and with Washdown/discharge hose, Box of 50 envelope papers, Starter sample pack of filter powder, Lids, Clean out rod and brush
- Cooking capacity of approximately 80kg of frozen 10mm fries / 100kg of frozen french cut fries per hour

TECHNICAL DATA:

Dimensions (W x D x H):	794 x 876 x 1172	
Total Weight:	190Kg	
Cooking Area (W x D x H):	356 x 356 x 127mm (x2)	
Oil Capacity:	19 -21 Litres per tank	




GAS DETAILS	Natural Gas (NG)	Universal LP Gas (ULPG)
Minimum Supply Pressure	1.7 kPa	2.74 kPa
Operating Pressure	1.0 kPa	2.5 kPa
Total Gas Supply	258MJ/Hr	258MJ/Hr

3/4" BSP connection
10A plug & lead fitted

240 Volt 10Amp connection required to run filter system.

Legend:

A Gas Connection

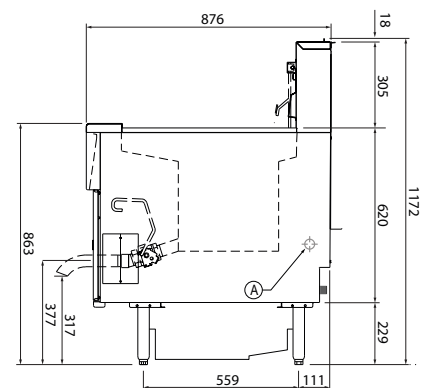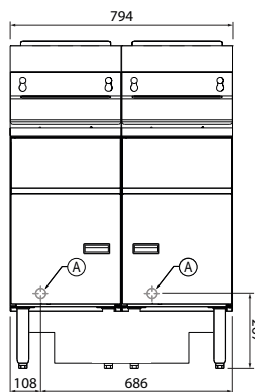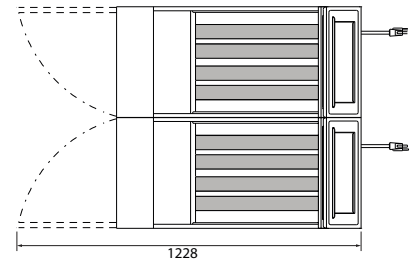

NOTE: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure when all appliances are full on.



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: B - 2/8/2024 - 02

www.stoddart.com.au

www.stoddart.co.nz

