



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

FED-X XUB7C13S2D 4-Door Stainless Steel Bench Fridge with GN Drawers

Model / SKU: XUB7C13S2D

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.




Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4197/product/8724/>

UNDERCOUNTER FRIDGES WITH DRAWERS

XUB7C13S2D



The Fed-X XUB D Series undercounter fridges offer exceptional practicality for commercial kitchens. Their refrigerated drawers keep ingredients within reach to improve workflow, while robust stainless steel construction and precise fan-forced cooling ensure reliable performance in Australian conditions.

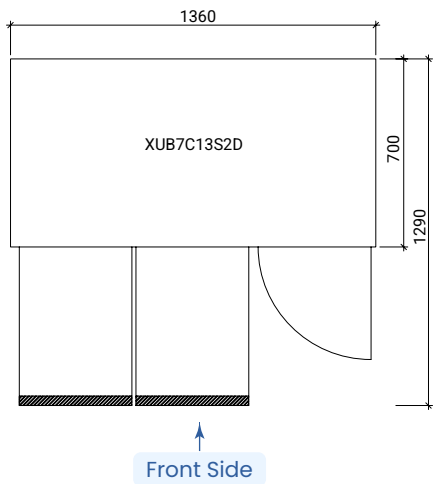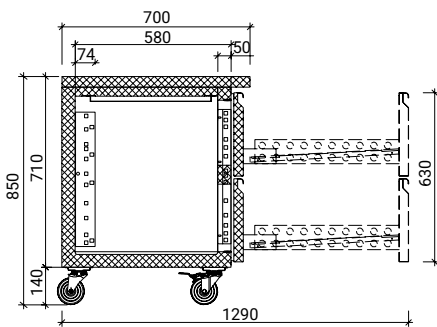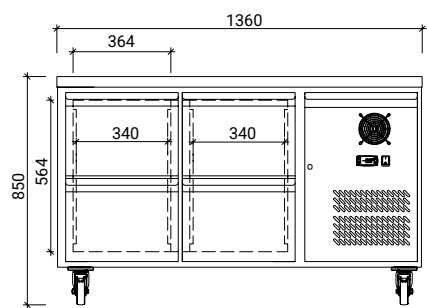

FEATURES AND FUNCTIONS	
Cooling System	Fan forced cooling
Defrost Method	Auto-defrost
Energy Consumption	2.267 kWh/24h
Exterior & Interior of the Cabinet	Exterior Body & Interior Body AISI201
Ergonomic Design	Water tray 0.7L, Digital controller, Rounded corners for easy cleaning, Unit can be placed against wall, Heavy duty castors with front wheel brakes.
Drawers	4 Drawers, AISI201, Heavy duty drawers, Integrated recessed drawer handle.
Blowing Agent	60mm, Cyclopentane
Ventilation (mm)	Top/Sides: 50mm, Rear: No requirement

TECHNICAL DESCRIPTION	
Power Cord	10Amp plug and lead
Power Cord Length	3m (2.3m outside cabinet)
Power Supply	240V/50Hz, 215W
Rated Current	1.3A
Evaporator Design	Aluminum finned type 1 pc fan
Compressor Cooling Capacity(W)	295

WARRANTY
2 Years Parts & Labour Plus 2 Years Parts Only Warranty
When Products Registered Within 14 Days of Invoice

PHYSICAL QUALITIES	
Width (mm)	1360
Depth (mm)	700
Height (mm)	850
Packing Width (mm)	1390
Packing Depth (mm)	730
Packing Height (mm)	910
Net Weight (kg)	105
Net Capacity (L)	208
Gross Capacity (L)	282

PHYSICAL QUALITIES	
Max. ambient temp/RH	43°C 70%
Climate Class	5
Temperature Range	-2°C to +8°C
Rated kWh/year	827
Refrigerant	R290 (56g)
Energy Efficiency Index (EEI %)	36.5
Star Rating / GEMS Rating	5 (5Ml)

SAFETY & STANDARDS: GEMS Certificate; IEC/IECEE CB Scheme;



To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.