



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Fagor 700 series natural gas mild steel 1 zone fry top FTG7-05L

Model / SKU: FTG7-05L

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/412/product/5703/>



Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
FT-G705 L LPG

19030765

03/05/2021

DENOMINATION:

LPG gas frytop with thermostatic temperature control, smooth hot-plate, half module, 700 range.

DESCRIPTION :

- Stamped surface tops manufactured in 1.5 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- Rapid reaction and recovery times of the fry-top temperature.
- The fry tops are welded to the stamped surface top.
- The stamped shell and its rounded edges and corners make cleaning much easier.
- The fry top is tilted towards the front to make it easier to collect grease and liquids.
- Fitted with an opening to collect cooking grease and a tray to store it which has capacity to store up to 2 litres depending on the model.
- Optional anti-splash side and rear guards, easy to remove.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.
- Machines with IPX5 grade water protection.
-
- Model with smooth hot plates.
- 12 mm thick mild steel fry tops which are quick-heating and high power.
- Gas heated model with high efficiency burners (separate burners for whole-module models).
- Model with thermostatic temperature control (between 100 and 300 °C).
- Burner ignition through electronic spark igniter. Therefore, the gas models do not need electricity for installation. With an access tube for manual ignition.
-
- Whole-module fry tops have two separate heating areas.

POSSIBLE OPTIONS :


- 230 1N- Transformation A 230 V single phase
- 230 III - A 230 V three-phase transformation without neutral
- MARINE - Other machines - Ship transformation - 440 III

POSSIBLE ACCESSORIES :

- REFRIGERATED STANDS 900
- ACCESSORIES KORE
- STANDS 700
- FRY-TOP ACCESSORIES KORE
- KORE WHEELS
- TALL CHIMNEY KORE

DIMENSIONS

X Width	400 mm	X Gross width	440 mm
Y Depth	730 mm	Y Gross depth	820 mm
Z Height	290 mm	Z Gross height	510 mm
Net Weight	35,0 kg	Gross Weight	42,0 kg
Net volume	0,080 m3	Gross volume	0,184 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage N/A

GAS TECHNICAL SPECIFICATIONS

Gas type LPG

Gas power 7,50 kW

Gas consumption 0,591 kg/h

Regulated LPG G30/G31 28-30/37 mbar

NG G20/G25/G25.1 20/25/25 mbar

CONNECTIONS TECHNICAL SPECIFICATIONS


Gas diameter 1 R.3/4"G




www.fagorindustrial.com



FT-G705

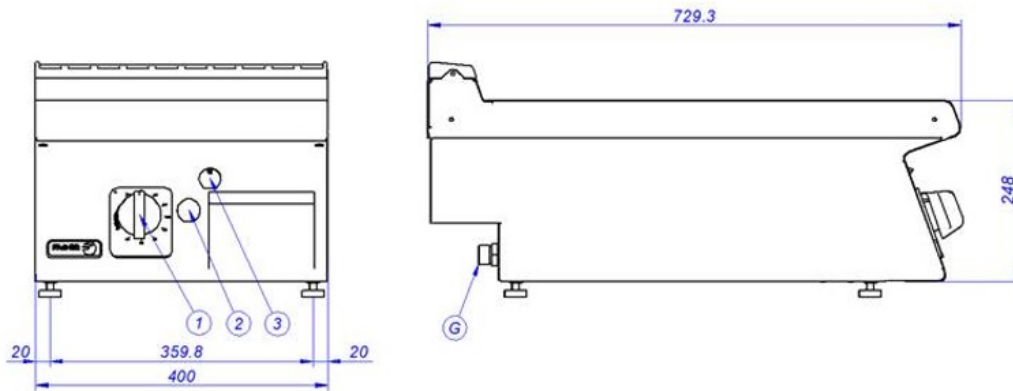

FT-G710

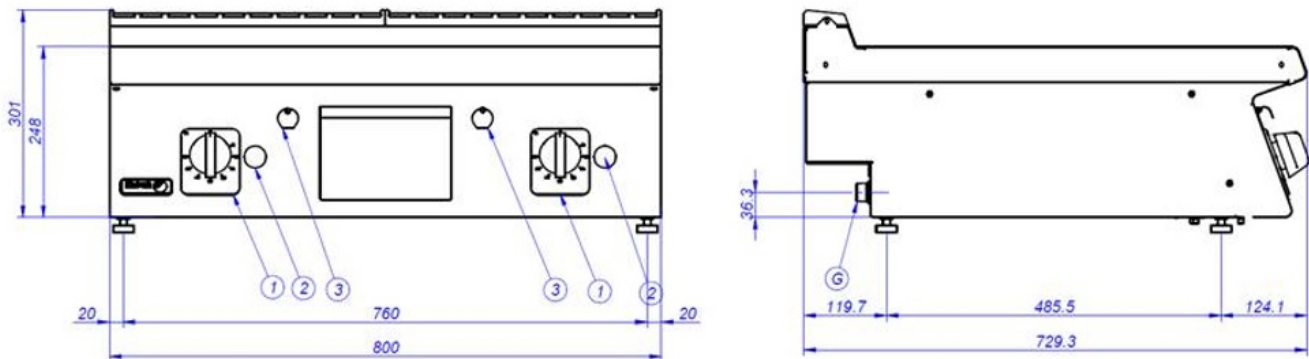

G – Entrada de Gas
E. Conexión eléctrica
1 – Grifo válvula de gas
2 – Pulsador piezoeléctrico
3. Orificio de encendido manual

Gas Inlet
Electrical connection
Gas valve tap
Piezoelectric ignitor
Manual ignition hole

Entrée de gaz
Connexion électrique
Robinet vanne gaz
Allumeur piézoélectrique
Trou d'allumage manuel