



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Friginox MX15-5AECR Reach-In Blast Chiller/Freezer – 4×1/1 GN

Model / SKU: MX15-5AECR

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/Friginox_MX15-5AECR_an.pdf

MX15-5AECR Reach-in Blast Chiller / Freezer

Standard Features

- Free standing unit on legs
- Economy unit
- Electro mechanical controls
- Removable and adjustable shelf runners able to accept Gastronorm pans
- Temperature display in °C
- Functions - Chill, Freeze and "Hard" cycle
- Automatic preservation mode at the end of cycle
- Defrost feature removes ice from evaporator
- Eco-friendly R455A refrigerant gas model
- Refrigerant evaporator with double air flow
- Adjustable shelf runner height 5 x 64mm or 9 x 32mm spacing
- Supplied with 4 pair of runners
- Self-closing door magnetically seals. Door remains open past 90°C for convenient loading and unloading
- Right hinge door model - left hinge door available upon request
- Internal coved corners, removable door gasket
- Water protection index rating IP459
- Adjustable 150mm legs for levelling up to 180mm




Please refer to Moffat price list for options and accessories

Technical data


Tray capacity	4 x 1/1 GN trays
Tray clearance	64mm
External dimensions	W 770mm x D 790mm x H 945mm
Load capacity	Blast Chilling +70°C to +3°C 15kg* Blast Freezing +70°C to -18°C 5kg*
Electrical connections	1P+N+E, 230-240V, 50Hz, 0.95kW
Nett weight	120kg
Air-cooled condensing unit - Refrigerant type R455A	
Ambient temperature requirement +15°C — +32°C	

* Note – Load capacities may vary depending on the thermal conductivity of the food being chilled, the thickness of product and container used

Dimensions

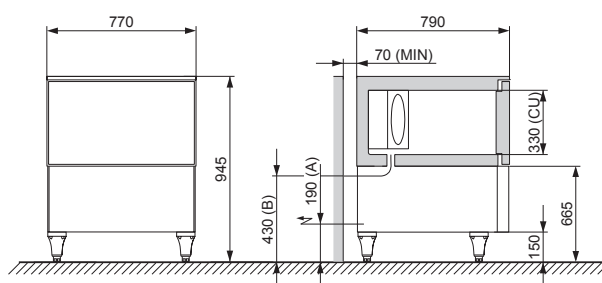

- (A) Electrical power supply
(B) De-icing water runoff
(CU) Useful
(MIN) Minimum



Australia
moffat.com.au

Moffat Pty Limited
740 Springvale Road
Mulgrave
Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values.
In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.
© Copyright Moffat Ltd
AN-FRI-S-2501



an Ali Group Company



The Spirit of Excellence