



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Frigenox MX85AT7R Reach-In Blast Chiller/Freezer – 21 Trays

Model / SKU: MX85AT7R

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/Frigenox_MX85AT7R_an.pdf

MX85AT7R Reach-in Blast Chiller / Freezer

Standard Features

- Free standing and self-contained unit on legs
- 7" ergonomic touch screen with large keys for ease of use
- User friendly operation with easy to use functions:
 - Hard or soft chill / hard or soft freeze mode
 - Easy switch to probe or timer mode
 - Self Adaptive intelligent chilling mode
- Auxiliary functions: ice cream hardening, ventilated drying, multiple timers, customisable multiple phases, raw fish sanitation
- 40 programmable cycles with favourites key – shortcuts to last 9 programs used
- Eco-friendly R455A refrigerant gas model
- Refrigerant evaporator with double air flow
- Removable and adjustable shelf runners able to accept gastronorm pans or euro standard 600mm x 400mm bakery trays.
- Adjustable shelf runner height 21 x 66mm or 43 x 33mm spacing
- Supplied with 21 pair shelf runners
- Pre-chilling cycle key to maximise efficiency
- Automatic hold mode after each cycle
- Manual defrosting with automatic control of time
- 3 point core temperature probe
- Timer mode or continuous run
- Right hinge door model - left hinge door available upon request
- Integrated door latch to aerate cabinet when not in use
- Automatic fan stop when opening the door
- External and internal finish made of 304 stainless steel
- Heated door frame to reduce condensation
- Injected polyurethane foam insulation - 60mm thick
- 150mm high stainless steel adjustable feet to 180mm

Please refer to Moffat price list for options and accessories

Technical data

Tray capacity	21 x 1/1GN trays
Tray clearance	66mm
External dimensions	W 770mm x D 790mm x H 2235mm
Load capacity	85kg* chill / 40kg freeze*
Electrical connections	3P+N+E, 400-415V, 50/60Hz, 20A, 4.0kW
Nett weight	225kg
Waste	Provide for a water runoff with trap
Air-cooled condensing unit - Refrigerant type R455A	
Ambient temperature requirement +15°C — +32°C	

* Note – Load capacities may vary depending on the thermal conductivity of the food being chilled, the thickness of product and container used

Australia
moffat.com.au

Moffat Pty Limited
740 Springvale Road
Mulgrave
Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand
moffat.co.nz


Moffat Limited
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values. In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.


© Copyright Moffat Ltd
AN-FRI-S-2501



Dimensions

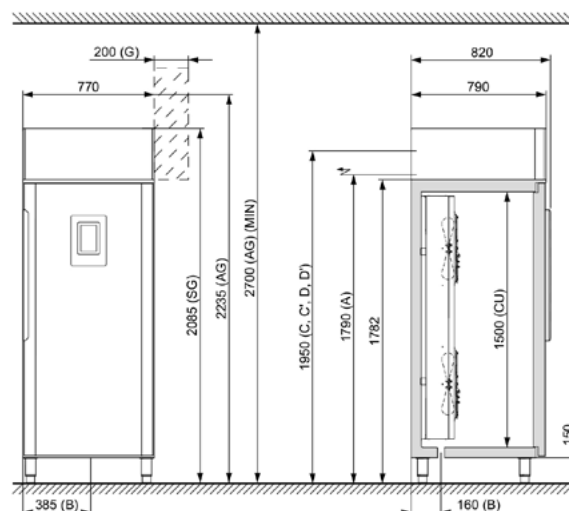

- (A) Electrical power supply
- (B) De-icing water runoff
- (AG) Without housed unit
- (G) Area to keep clear for ventilation of the condensing unit
- (D) Liquid line 1/2"
- (D') Suction line 7/8"
- (CU) Useful
- (MIN) Minimum

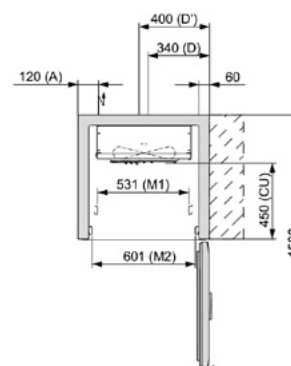

an Ali Group Company



The Spirit of Excellence