



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Friginox MX1LSTS7-CF 1-Trolley Blast Chiller/Freezer – 1080mm

Model / SKU: MX1LSTS7-CF

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/Friginox_MX1LSTS7-CF_an.pdf

MX1LSTS7-CF Roll-in Blast Chiller / Freezer

Remote condensing unit version

Standard Features

- Roll-in trolley unit single or passthrough access (trolley not included) - various door opening configuration available upon request
- 7" ergonomic touch screen with large keys for ease of use
- User friendly operation with easy to use functions:
 - Hard or soft chill / hard or soft freeze mode
 - Easy switch to probe or timer mode
 - Self Adaptive intelligent chilling mode
- Auxiliary functions: ice cream hardening, ventilated drying, multiple timers, customisable multiple phases, raw fish sanitation
- 40 program cycles with favourites key – shortcuts to last 9 programs used
- Supplied with 20mm insulated stainless steel floor and ramp expansion and solenoid valves, drip tray and piping
- Pre-chilling cycle key to maximise efficiency
- Automatic hold mode after each cycle
- Manual defrosting with automatic control of time
- 3 point core temperature probe
- Timer mode or continuous run
- Integrated door latch to aerate cabinet when not in use
- Automatic fan stop when opening the door
- USB HACCP Recorder
- External and internal finish made of 304 stainless steel
- Heated door frame to reduce condensation
- Injected polyurethane foam insulation - 80mm thick
- Assembly required
- Remote condensing unit not supplied

Please refer to Moffat price list for options and accessories

Technical data

Capacity	1 x 1/1GN trolley (trolley not included)
External dimensions	W 1080mm x D 1030mm x H 2170mm
Usable internal dimensions	W 650mm x D 790mm x H 1885mm (A1) W 650mm x D 820mm x H 1885mm (A2)
Load capacity	80kg chill / 40kg freeze*
Electrical connections	1P+N+E, 230-240V, 50/60Hz, 20A, 2.7kW
Waste	Provide for a water runoff & trap to the selected waste point (B)
Door configuration	Must be stated at time of order
Nett weight	200kg
Remote condensing unit version (remote condensing unit not included)	
Remote condensing unit requirements - Refrigerant type R452A (other gas types available upon request)	
Condensing capacity upright Blast Chiller/Freezer 1.6kW / 3.8kW / 7.1kW for the respective evaporation temperatures of -40/-20/-10°C	
Remote condensing unit with pump down control	
Ambient temperature requirement +15°C — +43°C	

* Note – Load capacities may vary depending on the thermal conductivity of the food being chilled, the thickness of product and container used

Australia
moffat.com.au

Moffat Pty Limited
740 Springvale Rd, Mulgrave
Victoria 3170, Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand
moffat.co.nz


Moffat Limited
45 Illinois Drive, Izone Business Hub
Rolleston 7675, New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values.
In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN-FRI-S-2501




Dimensions

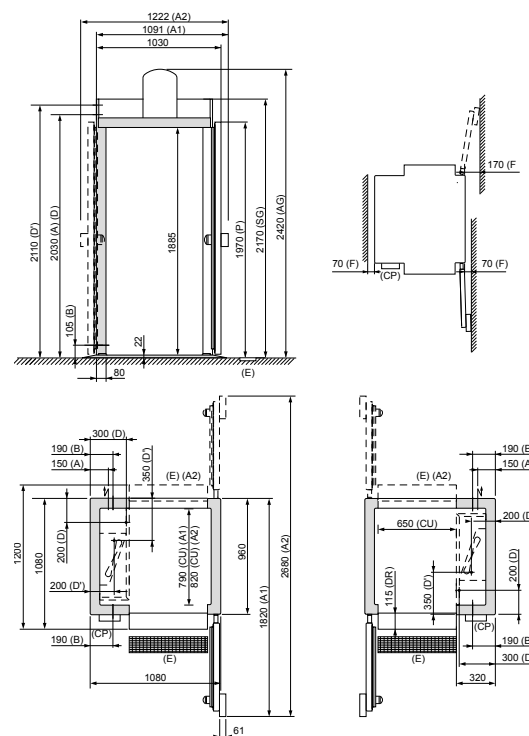

- | | |
|--|---|
| (A) Electrical power supply | (E) Duct |
| (B) Pre-drilling for de-icing water runoff | (F) Distance from wall |
| (AG) With air-cooled housed unit | (CU) Useful |
| (SG) Without housed unit | (P) Door height compared with the floor |
| (D) Liquid Line 3/8" | (DR) Ramp proud |
| (D') Suction line 1"1/8 | (A1) Single Access |
| (CP) Control panel | (A2) Pass through |

Alternative door opening configurations available

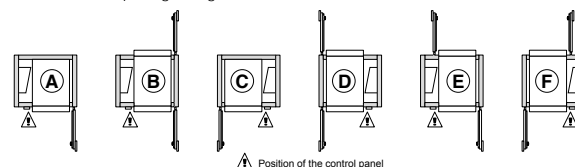

an Ali Group Company



The Spirit of Excellence