



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Friginox EF-A-MX1TS7-CF - Blast Chiller / Freezer Refrigeration System

Model / SKU: EF-A-MX1TS7-CF

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/Friginox_EF-A-MX1TS7-CF_an.pdf

EF-A-MX1TS7-CF Blast Chill/Freeze Refrigeration System

Standard Features

- Control panel, electrical box, evaporator block and air deflector
 - 7" ergonomic touch screen with large keys for ease of use
 - User friendly operation with easy to use functions:
 - Hard or soft chill / hard or soft freeze mode
 - Easy switch to probe or timer mode
 - Self Adaptive intelligent chilling mode
 - Auxiliary functions: ice cream hardening, ventilated drying, multiple timers, customisable multiple phases, raw fish sanitation
 - 40 program cycles with favourites key – shortcuts to last 9 programs used
 - Friginox refrigeration system includes, control panel, electrical box, evaporator, air deflector, expansion and solenoid valves, drip trays and piping
 - Pre-chilling cycle key to maximise efficiency
 - Automatic hold mode after each cycle
 - Manual defrosting with automatic control of time
 - Multi-point core temperature probe
 - Timer mode or continuous run
 - Automatic fan stop when opening the door
 - Pre-wired electrical box with connection terminal
 - Fixing of the evaporator on a vertical wall
 - Supply of accessories for fixing the evaporator on a vertical wall (isothermal panels), with injected polyurethane foam.
- For other panel types please advise for specific fittings
- ** All external panels to be supplied by contractors ****
- Assembly required

Please refer to Moffat price list for options and accessories

Technical data

Recommended internal room dimensions	W 760mm x D 820mm x H 1885mm
Load Capacity	80kg chill / 40kg freeze*
Electrical Connections	1P+N+E, 230-240V, 50/60Hz, 20A, 2.7kW
Waste	Provide for a water runoff & trap
Nett weight	115kg
De-icing waste runoff tray and pipework not included, to be supplied by panel installer	
Remote condensing unit version (remote condensing unit not included)	
Refrigerant type R452A (other gas types available upon request)	
Condensing capacity upright Blast Chiller/Freezer 1.6kW / 3.8kW / 7.1kW for the respective evaporation temperatures of -40/-20/-10°C	
Remote condensing unit with pump down control	

* Note – Load capacities may vary depending on the thermal conductivity of the food being chilled, the thickness of product and container used

Australia
moffat.com.au

Moffat Pty Limited
740 Springvale Road
Mulgrave
Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au


New Zealand
moffat.co.nz

Moffat Limited
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values.
In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.
© Copyright Moffat Ltd
AN-FRI-2501



Dimensions

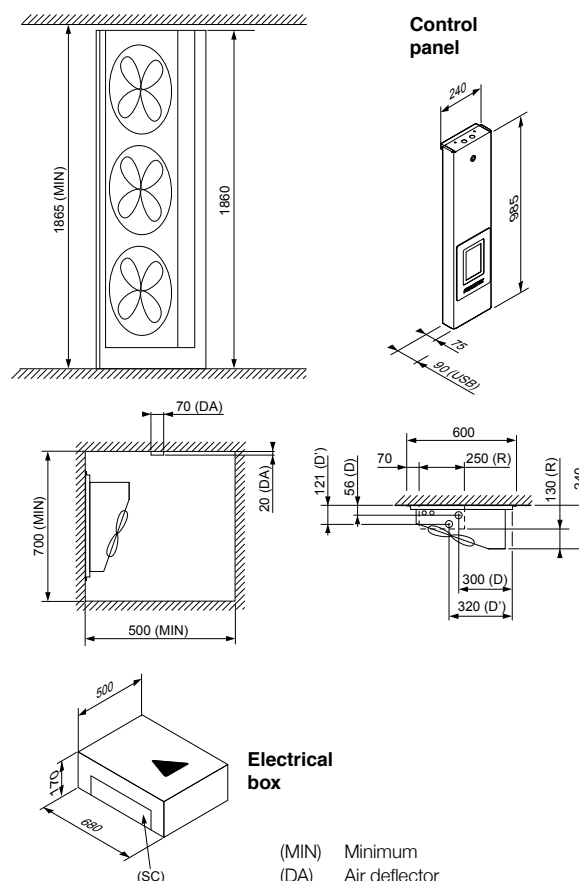

Electrical box

- (MIN) Minimum
(DA) Air deflector
(D) 3/8" liquid line connection
(D') 1" 1/8 suction line connection
(R) Cables and pipe output
(SC) Electric cables output
(USB) With USB option



an Ali Group Company



The Spirit of Excellence