



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Friginox SBFMX30AECR 6 Tray Blast Chiller/Freezer – 30kg Chill 15kg Freeze

Model / SKU: SBFMX30AECR

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/Friginox_SBFMX30AECR_an.pdf

SBFMX30AECR Reach-in Blast Chiller / Freezer


Standard Features

- Suitable for mounting 6 or 10 tray Combi Steamer on top
- Free standing unit on legs
- Electromechanical controls
- Eco-friendly R455A refrigerant gas model
- Refrigerant evaporator with double air flow
- Air-cooled condensing unit
- Adjustable shelf runner height 6 x 90mm or 12 x 45mm spacing
- Supplied with 6 pairs of runners
- Temperature display in °C
- Functions - Chill, Freeze and "Hard" cycle
- Automatic preservation mode at the end of cycle
- Pre-chilling cycle key to maximise efficiency
- 3 point core temperature probe
- Automatic fan stop when opening the door
- Right hinged door only model
- Operator selectable de-icing cycle
- External and internal finish made of 304 stainless steel
- Front frame with anti-condensation system
- Injected polyurethane foam insulation - 60mm thick
- 105mm high stainless steel adjustable feet to 135mm

Please refer to Moffat price list for options and accessories



Dimensions





- (A) Electrical power supply
- (B) De-icing water runoff
- (CU) Useful
- (MIN) Minimum
- (SG) Without housed unit
- (D) Liquid line 3/8"
- (D') Suction line 5/8"

Technical data

Trolley Capacity	6 x 1/1GN trays
Tray clearance	90mm
External dimensions	W 930mm x D 805mm x H 838mm
Load capacity	30kg* chill / 15kg* freeze
Electrical connections	1P+N+E, 230-240V, 50/60Hz, 15A, 1.7kW
Nett weight	140kg
Waste	Provide for a water runoff with trap
Air-cooled condensing unit - Refrigerant type R455A	
Ambient temperature requirement +15°C — +32°C	

* Note – Load capacities may vary depending on the thermal conductivity of the food being chilled, the thickness of product and container used

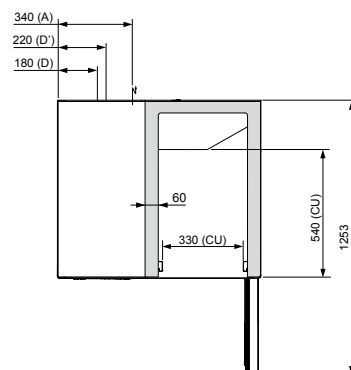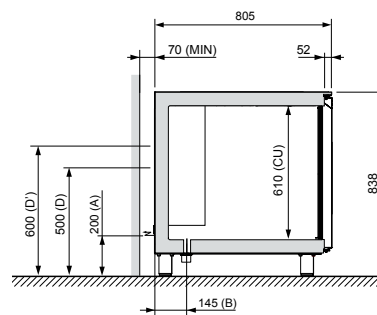

Australia
moffat.com.au

Moffat Pty Limited
740 Springvale Road
Mulgrave
Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values.
In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN-FRI-S-2501



an Ali Group Company



The Spirit of Excellence