



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Anets AGG14T Split■Pot Gas Fryer – 9–11L/side | KW Commercial Kitchen

Model / SKU: AGG14T

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

agg14t b2 datasheet

SKU: AGG14T

Distributed by KW Commercial - kwcommercial.com.au

Manufacturer documentation - (c) Anets

Retrieved: 2026-07-08

<https://www.kwcommercial.com.au/product/anets-agg14t-split-pot-gas-fryer-397mm>



The Anets GoldenFry range now includes a wide variety of tube fryers using the inverted burner design to deliver efficiency and fast recovery.

Product Information:

- 4 x 102mm deep tube burners (2 tubes per side)
- Highly efficient "inverted" tube burners
- Tank - Stainless steel construction
- Cabinet - Stainless steel front, door & sides
- Battery spark ignitor operation
- Millivolt Thermostat
- High temperature safety limit switch
- Built in integrated flue deflector & gas regulator
- Cooking capacity of approximately 14kg of frozen 10mm fries / 18kg of frozen french cut fries per hour per tank
- Supplied with 2 x 165mm wide nickle plated wire fryer baskets, removable stainless steel basket support, lid, drain pipe extension & clean out rod
- 10 year warranty on stainless steel frypot

OPTIONAL EXTRAS:




- Fish plate alternative
- Capping strips & Splashguards
- 229mm (9") fixed and swivel castors with brakes

TECHNICAL DATA:

Dimensions (W x D x H):	397 x 876 x 1172
Total Weight:	104 Kg
Cooking Area (W x D x H):	177 x 127 x 356mm (x2)
Oil Capacity:	9-11 Litres per pan

GAS DETAILS	Natural Gas (NG)	Universal LP Gas (ULPG)
Minimum Supply Pressure	1.7 kPa	2.74 kPa
Operating Pressure	1.0 kPa	2.5 kPa
Gas Supply Per Tank	53MJ/Hr	53MJ/Hr
Total Gas Supply	100MJ/Hr	100MJ/Hr

3/4" BSP connection

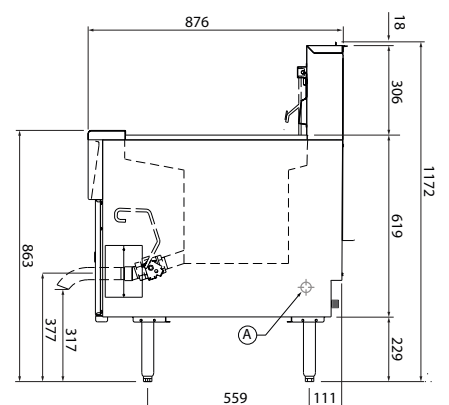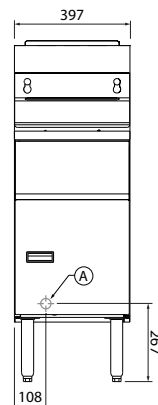

Legend:

A Gas Connection

NOTE: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure when all appliances are full on.



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: B - 2/8/2024 - 02

www.stoddart.com.au

www.stoddart.co.nz

