



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Benchstar IF3500S-AL Auto-Lift Benchtop Deep Fryer – 8L

Model / SKU: IF3500S-AL

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4045/product/9066/>


AUTOMATIC LIFTING FRYER



IF3500S-AL



The oil temperature is precisely controlled, solving common fryer issues like forgotten food during busy periods, temperature fluctuations, inconsistent taste, lack of standardisation, and staff shortages. The device also features overheating & overvoltage protection and will automatically shut down after 6 hours of operation. It is timer controlled. Once the cooking is done, the device will automatically rise without any manual intervention.

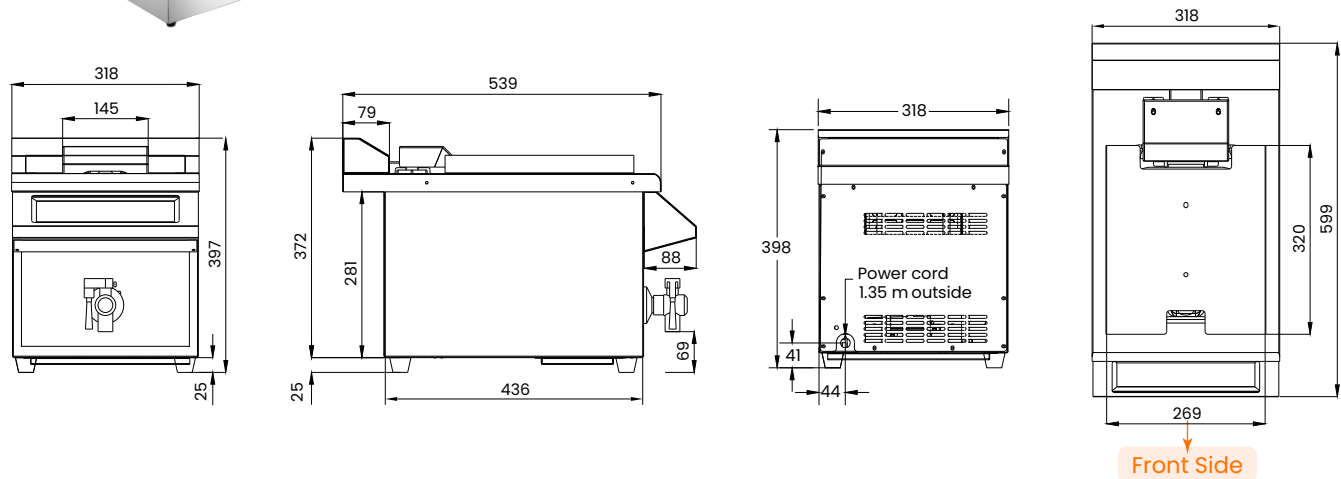

FEATURES AND FUNCTIONS	
Power Source	Electric
Cooking Settings	5 Level (With Memory Function)
Exterior & Interior of the Cabinet	Exterior body AISI201 Interior AISI202.
Ergonomic Design	Touch control with tempered glass, Timing and heating indicators, 0-15 min with audible bell, 1 pcs lid, Faucet oil drain valve, LED lights.
Fired Basket	190×230×140mm, 1pcs with AISI201, Load capacity 10 kg.
With Cold Zone	Cold zone capacity 0.35L, Material AISI202.
Automatic System	Auto Shut-off, Auto lifting, Lifting speed 12.1 mm/s; Height 127 mm.
Filtration Settings	1pcs filter screen, AISI201, Single-layer filtration, Faucet oil drain valve.

Safety System	Automatically shuts down after 6h of operation, Timer controlled, Overheating&over voltage protection.
---------------	--

TECHNICAL DESCRIPTION	
Power Cord	10Amp plug and lead
Power cord length	1.8m (1.35m outside cabinet)
Power Supply	240V/50Hz
Rated&Heating Power	3500W

PHYSICAL QUALITIES	
Width (mm)	320
Depth (mm)	600
Height (mm)	400
Packing Width (mm)	404
Packing Depth (mm)	722
Packing Height (mm)	500
Net Weight (kg)	16.5
Gross Capacity (L)	12.4
Net Capacity (L)	8

PERFORMANCE SPECIFICATION	
Ingress Protection Class	IPX3
Temperature Range	60 to 190°C
Preheating Time	Tbc
Heating Element/Location	Copper coil/Under tank
Heater Design	Electromagnetic heating without heating tubes.
Heating Protection	Within 240°C; >AC 290V; <AC 150V

WARRANTY	
1 Year Parts and Labour Warranty	

