



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**Sammic UX-150SBC DD Pass-Through Dishwasher – 10.5kW, 500×600 Rack**

**Model / SKU: UX-150SBC DD**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.sammic.com.au/wp-content/uploads/2025/specsheet/UX-150SBC-DD.pdf>



# DISHWASHER UX-150SBC 400/50/3N DD

Rack size 600 mm x 500 mm and door clearance 430 mm. Double-skinned hood.

P/N 1303460



WARE WASHING  
PASS-THROUGH DISHWASHERS

## SALES DESCRIPTION

Top panel.

Sani-Control: guaranteed disinfection.

Double-walled hood: insulation and energy efficiency.

High-performance stainless steel wash arms.

3-stage filtering system.

### Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing
- ✓ WRAS certified.

### New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).

### Double-Walled (Ultra ISO)

- ✓ Double-Walled Structure: thermo-acoustic insulation to attenuate the sound level and improve energy efficiency

### High performance washing arms

- ✓ Stainless steel nozzles that ensure the distribution of washing water with proper angles and precise jets.
- ✓ Optimal washing results.
- ✓ Easy removal of the diffusers without tools for maintenance and cleaning.

### 3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant



washing performance.

### Designed to last

- ✓ “Flow” opening mechanism: allows the hood to be raised with less effort
- ✓ High load capacity 43 cm: suitable for GN 1/1 and Euronorm
- ✓ Stainless steel surface filters for greater stability and resistance during intensive use

### Premium warewashing

- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Top panel: it allows quick and intuitive reading of information, ideal for corner installations.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

### You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

## INCLUDES

- ✓ Rinse aid pump.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.
- ✓ Detergent Dispenser
- ✓ 1 basket for glasses and pots.
- ✓ 1 basket for plates.
- ✓ 1 cutlery insert.

## ACCESSORIES

- ☐ Tables for pass-through dishwashers
- ☐ Central sorting tables
- ☐ Double connection central sorting table
- ☐ Prewashing tables for pass-through and rack conveyor dishwashers
- ☐ Connecting tables for pass-through dishwashers and rack conveyors
- ☐ Dosing equipments for AX / UX hood-type dishwashers
- ☐ Tables for connecting two hood-type dishwashers
- ☐ External control panel for UX pass-through dishwashers
- ☐ Special baskets for plastic glasses
- ☐ 600 x 500 mm baskets

## SPECIFICATIONS

Basket dimensions: 600 mm x 500 mm

Useful height: 430 mm

Cycles: 6

Cycle duration: 60 / 90 / 100 / 150 / 210"

Production baskets / hour: 60 / 40 / 36 / 24 / 17

Boiler capacity: 12 l

Wash tank capacity: 25 l

### Consumption and savings

- ✓ Water consumption/cycle: 3 l
- ✓ Automatic switch-off: 120'

### Energy consumption



DISHWASHER UX-150SBC 400/50/3N DD

Rack size 600 mm x 500 mm and door clearance 430 mm. Double-skinned hood.



P/N 1303460

Loading

- ✓ Pump: 1500 W / 2 Hp
- ✓ Tank: 3000 W
- ✓ Boiler: 9000 W
- ✓ Total loading: 10500 W

Electrical supply: 400 V / 50 Hz / 3N~ (16 A)\_\_\_

External dimensions (W x D x H)\_\_\_

- ✓ Width:730 mm (Wide with handle: 810 mm)

- ✓ Depth: 760 mm (Bottom with handle: 835 mm)

- ✓ Height: 2080 mm / 1572 mm


Net weight: 130 kg

Wash temperature: 65°C

Rinse temperature: 87°C

Crated dimensions

840 x 860 x 1600 mm

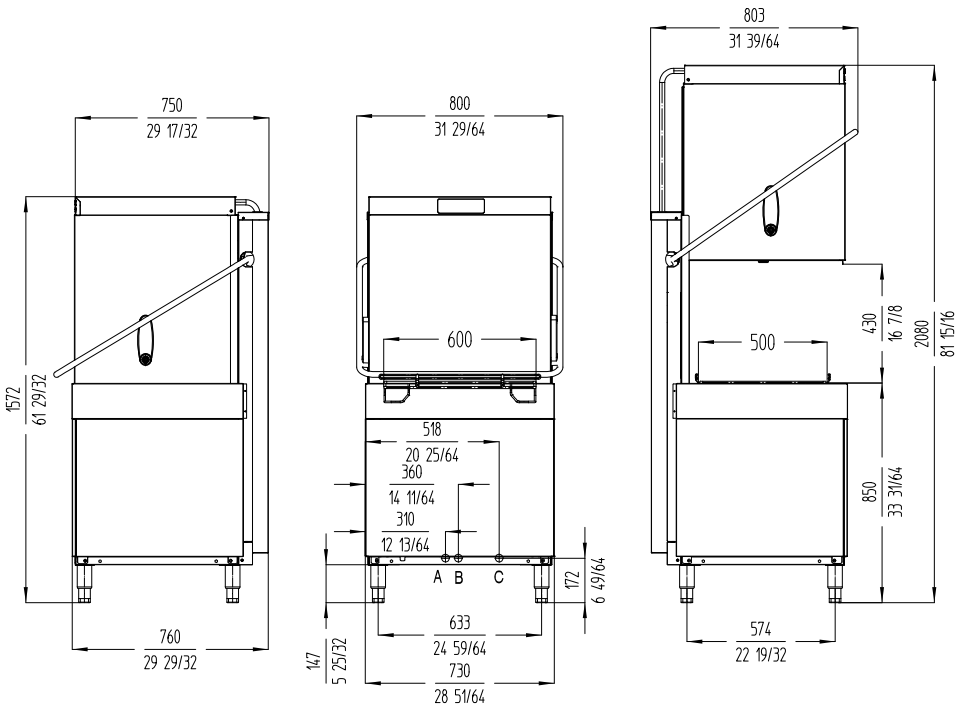

A: Entrada de agua 3/4" GAS  
B: Tubo de desagüe ø30mm  
C: Cable conexión

**sammic** | [www.sammic.com](http://www.sammic.com)  
Food Service Equipment Manufacturer

Polígono Basarte, 1.  
20720 Azkoitia, Spain  
phone +34 943 15 72 36  
[sales@sammic.com](mailto:sales@sammic.com)



|          |      |
|----------|------|
| Project  | Date |
| Item     | Qty  |
| Approved |      |

product sheet  
updated 28/01/2025