



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Washtech PW2 Wide-Body Front-Loading Warewasher – 2×500mm Racks

Model / SKU: PW2

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE


The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/PW2_Au.pdf

PW2

Widebody Front-Loading Warewasher
W 1235mm x D 860mm x H 1790mm

Wash Chamber
W 1100mm
D 650mm
H 750mm



Washtech warewashers are built to improve the efficiency of operations washing oversized and/or heavily soiled items, from bakeries to production kitchens, supermarkets to hospitals. This is achieved with a continuous and consistent wash process throughout the day that is easy on your staff. With highly efficient water consumption rates, they are also light on the environment and operating costs.

The PW2 is a powerful, highly durable, simple-to-use and easy-to-maintain front-loading warewasher. It features Washtech hybrid controls which combine IP67 stainless switches, tried-and-tested switchgear, with a customisable electronic timer. Built with a large wash chamber and counterbalanced split door, the PW2 is ideal for washing bins, crates, bowls and other oversized items.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech PW2 will not let you down.

Standard Features

- Versatile 2, 4 and 6 minute wash cycles
- Large internal wash chamber with useable area of W 1100mm x D 650mm x H 750mm
- Low hot water consumption of 4.0 litres per cycle
- Washtech hybrid controls
- Easy installation supplied with:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
- Internal upper rail with optional and adjustable tines suited for hanging ladles, whisks and/or washing up to 20 baking or GN trays (up to 40mm deep) per cycle
- High powered dual-pump wash system
- Suitable for connection to low inlet water temperature and/or pressure (break tank and rinse pump fitted)
- Heavy-duty stainless steel construction and wash manifold
- Robust stainless steel wash and rinse arms with precision stainless steel jets
- Double heavy-duty stainless steel filtration system including dual scrap trays and separate wash inlet filter
- Wash chamber easily accessible via insulated counter-sprung split door
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x 435mm cup cover (K0452)
- 1 x cutlery basket (C660508)
- 1 x potwasher rack grid (824 30001)
- 1 x hanging rail with adjustable tines (824 10228)



PW2



moffat.com.au
washtech.com.au

Moffat Pty Limited

VIC/TAS/SA

70 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Fax 03-9518 3833
vsales@moffat.com.au

NSW

Telephone 02-8833 4111
nswsales@moffat.com.au

QLD


Telephone 07-3630 8600
qldsales@moffat.com.au

WA

Telephone 08-9413 2400
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
Version: WPW20020 2103

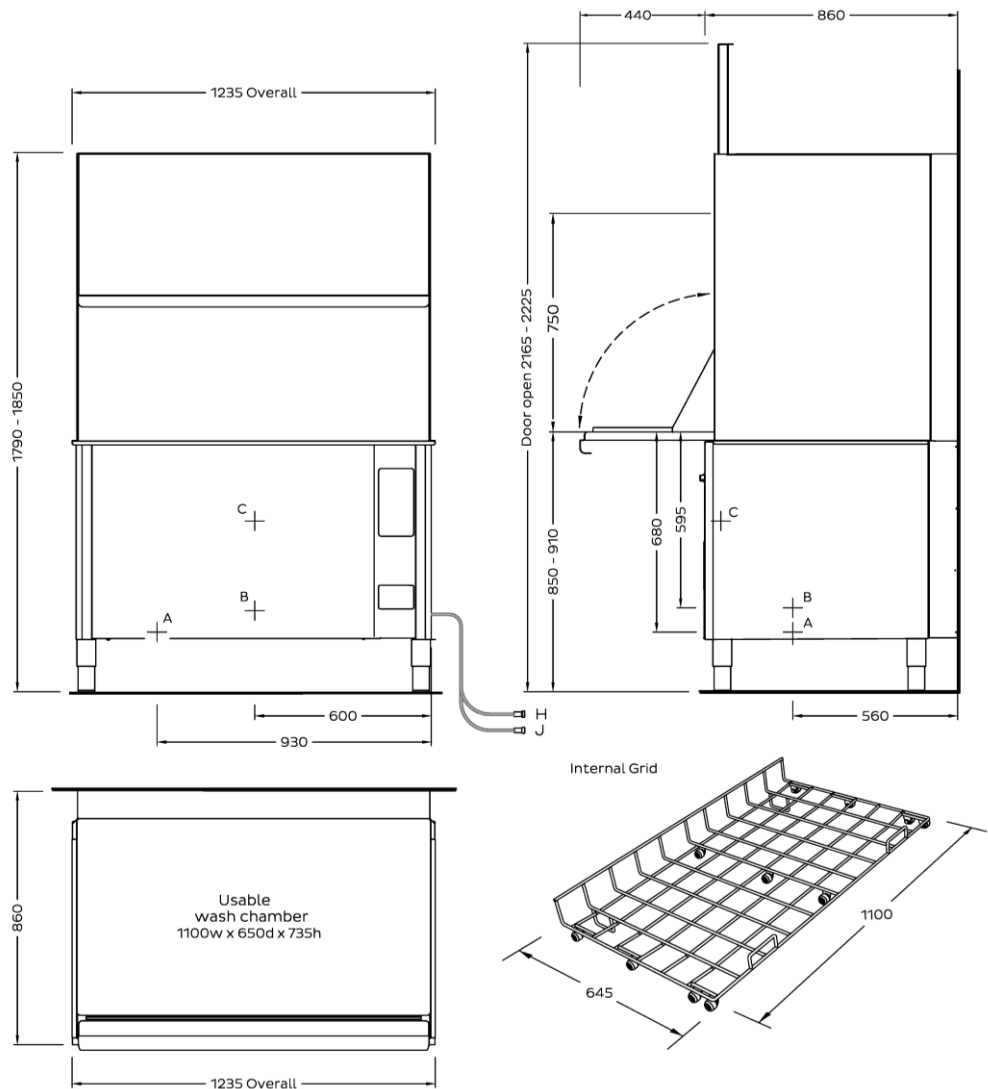

A - Hot Water*

Temperature 65°C
Connection 3/4" male; hose supplied
Pressure 100-350kPa
Flow 10 litres per min
Quality Potable - refer table
Backflow Prevention AVB
Consumption 4.0 litres per cycle

B - Waste

Connection 1.5" BSP male
Line 2.0" / 50mm minimum

C - Electrical	V	Hz	A/phase	Max kW
Three Phase	400	50	30	19.50
Three Phase	400	50	20	12.00

Dimensions

	Machine	Packed
Width (mm)	1235	1310
Depth (mm)	860	945
Height (mm)	1790	1830
Weight (kg)	220	276
Volume (m³)		2.18

Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl-		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

Isolating switch must be within 1m of, and not directly behind the machine.

* Suitable for connection to cold inlet water. For optimal productivity, use hot inlet water.

Refer to operator manual for installation instructions.



an Ali Group Company

