KW COMMERCIAL KITCHEN

PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

TurboChef SPTC.HHC.1618.48.V HhC 1618 High-h Conveyor Oven – 48” Ventless High-Sp

Model / SKU: SPTC.HHC.1618.48.V

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au

Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier’s instructions, specifications or warranty terms.

Official supplier source: /home/sarah/kw_system/07_Content_Library/product_db/supplier raw data/stoddart_extracted/15_TurboChef/Data Sheet

sptc.hhc.1618.48.v a1 datasheet

SKU: SPTC.HHC.1618.48.V

Distributed by KW Commercial - kwcommercial.com.au

Manufacturer documentation - (c) TurboChef

Retrieved: 2026-07-08

https://www.kwcommercial.com.au/product/sptc-hhc-1618-48-v-sptc-hhc-1618-48-v-a1-datasheet

TURBO CHEF HIGH h CONVEYOR 16.18™

SPTC.HHC.1618.48.V

Product Information

- 7” intuitive capacitive touch screen, featuring durable tempered glass
- Variable-speed recirculating air impingement system
- Idle mode for energy conservation
- Self-diagnostics for monitoring oven components and performance
- Independently-controlled top and bottom air impingement
- All stainless steel interior construction
- 400mm (16”) cook chamber opening
- 1219mm (48”) conveyor belt assembly with left or right feed conveyor belt direction (via software)
- Stackable design up to 3 high (requires stacking kit, sold separately)
- Includes two 150mm (6”) conveyor extensions
- External air filtration
- Easy to clean mono-finger design
- Cool to touch covers and panels

- **12-month warranty (Terms and conditions apply)**




Specifications

Model	SPTC.HHC.1618.48.V
W x D x H (mm)	1219 x 805 x 432 *1529 overall width including conveyor extensions
Weight	91kg
Belt Dimensions (mm)	406 x 1219
Opening (mm)	25 / 75
Total Connected Load	7.4kW (20A circuit*)
Electrical Connection	3Ø + N + E 380-415VAC / 50Hz IEC, 5-pin, 20A plug and lead fitted (1.8m)


*Circuit required to be determined at installation by a qualified electrician.


Shipping	Box: 1060 x 1346 x 711 / 141kg Crate: 1473 x 1168 x 711 / 166kg

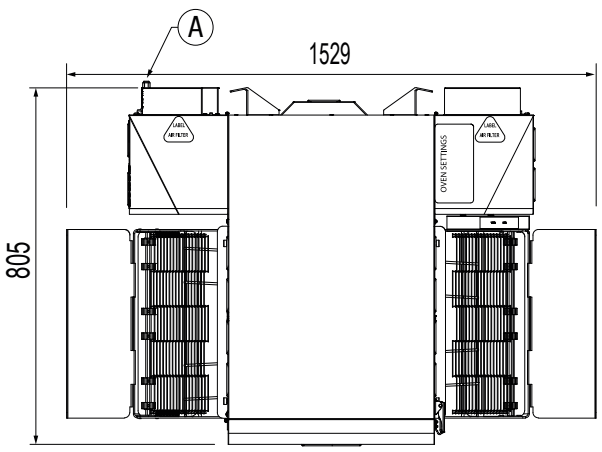

Legend

A Electrical Connection

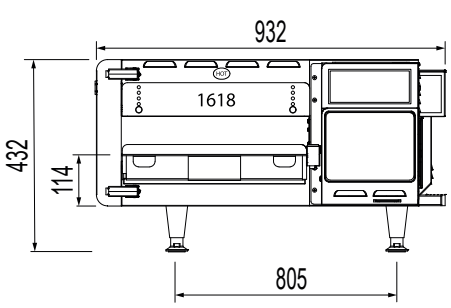

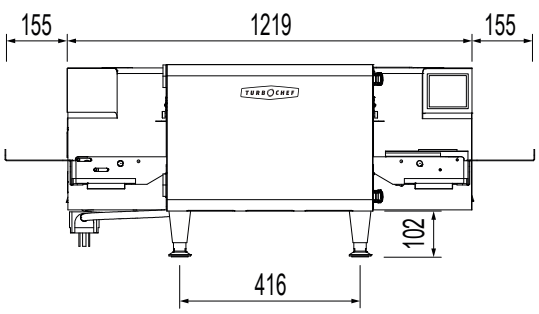

www.stoddart.com.au
www.stoddart.co.nz

Revision: A - 19/08/2024 - 01

Due to continuous product research and development, the information contained herein is subject to change without notice.