



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Thermaster ZCDTD125 Combined Display Freezer – 1250mm, 2 Doors

Model / SKU: ZCDTD125

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.




Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4202/product/6536/>

COMBINED FREEZER

ZCDTD125-BTM



The ZCDTD Series are designed to maximise frozen storage capacity while reducing floor footprint, making them ideal for supermarkets, convenience stores, and specialty retailers. With dual-zone operation, these units feature a top freezer with sliding self-closing doors and a spacious bottom freezer equipped with baskets for efficient stock organisation. The illuminated canopy provides built-in space for eye-level branding or product advertising, helping boost sales directly at the point of purchase.

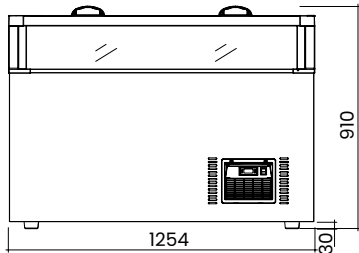

FEATURES AND FUNCTIONS

Cooling System	Static cooling
Energy Consumption	6.21 kWh/24h
Exterior & Interior of the Cabinet	Exterior Body White, Painted steel Interior Body Silver, Embossed aluminum
Ergonomic Design	LOW-E tempered glass, LED Lights, Self-evaporation, Digital controller.
Glass Door	Top Glass: 1 layer of LOW-E tempered. Front Glass: Triple-pane insulated glass, Outer and inner tempered Low-E, middle clear tempered.
Durable Door Profile	Grey color, plastic Sliding door
Shelves/Baskets	10 Baskets
Blowing Agent	70mm, Cyclopentane
Ventilation (mm)	Top/Rear: ≥100 mm Sides: No requirement

TECHNICAL DESCRIPTION

Power Cord	10Amp plug and lead
Power Cord Length	2.6m (2m outside cabinet)
Power Supply	240V/50Hz, 285W
Rated Current	2.5A
Compressor Cooling Capacity(W)	400
LED Lights	Upper inner liner, 2×8W LED strip

WARRANTY

2 Years Parts and Labour + 2 Years Parts Only for Products Registered within 14 Days of Invoice



PHYSICAL QUALITIES

Width (mm)	1254
Depth (mm)	836
Height (mm)	870+210 (Countertop support)
Packing Width (mm)	1384
Packing Depth (mm)	994
Packing Height (mm)	1205
Net Weight (Kg)	111
Gross Capacity (L)	470
Net Capacity (L)	327
Display Area (m²)	0.62

PERFORMANCE SPECIFICATIONS

Ambient temp/RH	25°C 60%
Climate Class	3
Temperature Range	-22°C to -18°C
Rated kWh/year	2266.65
Refrigerant	R290 (100g)
Energy Efficiency Index (EEI %)	59.86
Star Rating / GEMS Rating	4 (3Li)

SAFETY & STANDARDS: GEMS Certificate; IEC/IECEE CB Scheme; IOS;



To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.