



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Thermaster ZCDTD125 Combined Display Freezer – 1250mm, 2 Doors

Model / SKU: ZCDTD125

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page


DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4304/product/6536/>

UPRIGHT GLASS DOOR FREEZER

CIRCUIT DIAGRAM

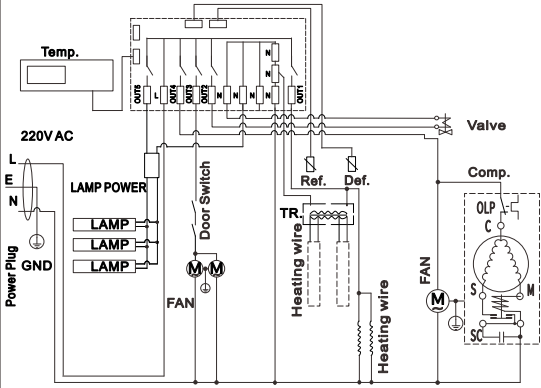




MODEL	ZCD-TD125-TOP
CLIMATIC CATEGORY	3
PROTECTIVE CLASSIFICATION OF ELECTRIC SHOCK RESISTANCE	I
INSULATION BLOWING GAS	Cyclopentane
TOTAL CAPACITY	218L
RATED VOLTAGE	220-240V~
RATED FREQUENCY	50Hz
RATED CURRENT	3.4A
RATED POWER INPUT	550W
DEFROST POWER INPUT	664W
LIGHT POWER	20W
REFRIGERANT	R290(65g)
ENERGY CONSUMPTION	13.50kWh/24h
NET WEIGHT	122kg

ISLAND FREEZER

CIRCUIT DIAGRAM

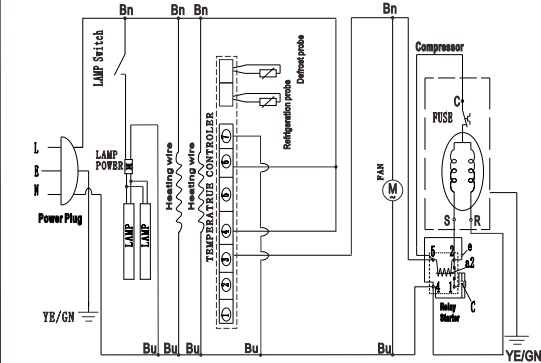



MODEL	ZCD-TD125-BTM
CLIMATIC CATEGORY	3
PROTECTIVE CLASSIFICATION OF ELECTRIC SHOCK RESISTANCE	I
INSULATION BLOWING GAS:	Cyclopentane
CAPACITY	470L
RATED VOLTAGE	220-240V
RATED FREQUENCY	50Hz
RATED CURRENT	2.5A
POWER	320W
POWER OF LAMP	16W
REFRIGERANT	R290 (100g)
ENERGY CONSUMPTION	6.21KW. h/24h
NET WEIGHT	109Kg