



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Bonvue H-SF840V Heated Display Cabinet – 1200mm, 740L

Model / SKU: H-SF840V


KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/4425/product/8987/>

DELUXE HEATED DISPLAY CABINET H-SF SERIES

DELUXE COLD DISPLAY SF SERIES



Fan-Forced Element Heating

Consistent heat distribution to hold serving temperature across every level.



Fan Forced Cooling

Uniform frost-free performance, keeps the cake perfectly textured and tasty.

Warm Yellow Lighting

Creates an inviting, "fresh-from-the-oven" look for hot snacks and baked goods.




Cold White LED Shelf Lighting

Crisp, bright lighting on every level to make cakes and drinks stand out.

Purpose-Built Hot Holding

Optimised to maintain stable warmth without relying on refrigeration components.



Natural Eco-Friendly Refrigerant

Uses a greener refrigerant choice for efficient, responsible cooling.




**SF820V
H-SF820V**

600x767x1350mm



**SF830V
H-SF840V**

1728x1095x1300mm



SF840V

1200x740x1350mm




SF850V

1500x740x1350mm




SF860V


1800x740x1350mm

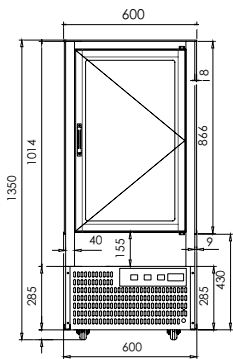


SF820V

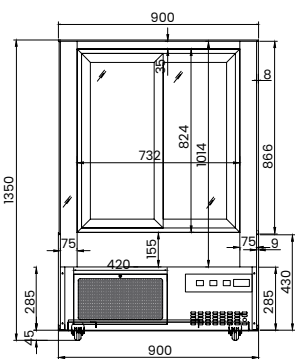


SF830V

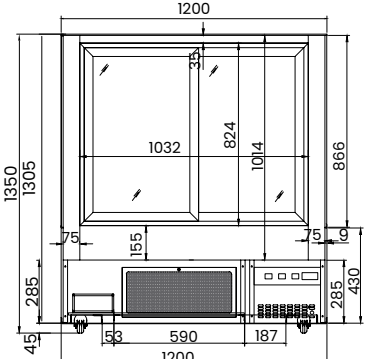


SF840V

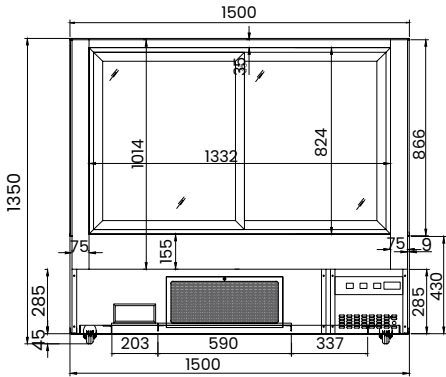

SF850V

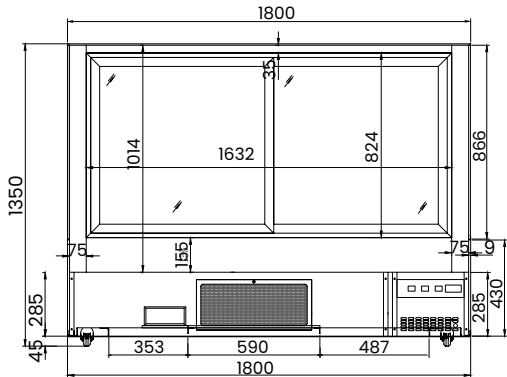


SF860V

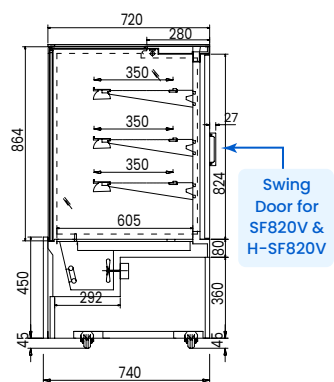


Swing Door for SF820V & H-SF820V


Code	Dimensions (WxDxH mm)	Net Weight(kg)	Net Capacity(L)	Temp Range (°C)	Ambient temp/RH%	Power (W/A)	Display area (m²)	GEMS Star Rating
SF820V	600x767x1350	128	370	+2 to +8	32°C60%	660/10	-	4
SF830V	900x740x1350	166	560	+2 to +8	32°C60%	845/10	2.23	4
SF840V	1200x740x1350	190	740	+2 to +8	32°C60%	1146/10	2.9	4
SF850V	1500x740x1350	236	930	+2 to +8	32°C60%	1380/10	3.46	4
SF860V	1800x740x1350	256	1120	+2 to +8	32°C60%	1422/10	3.9	4

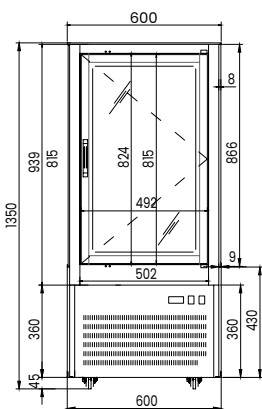


H-SF820V

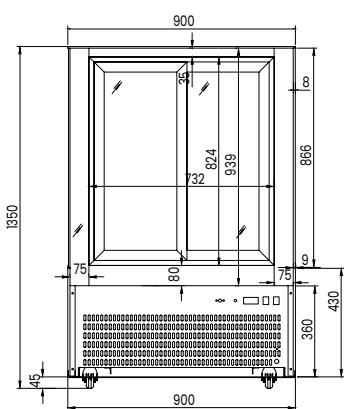

H-SF830V

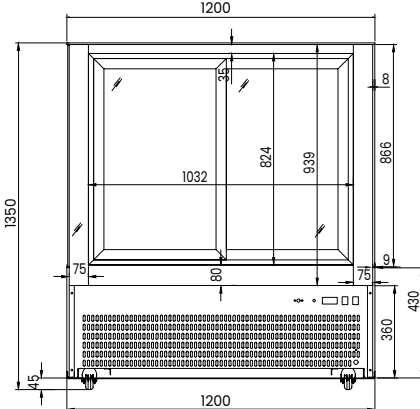

H-SF840V

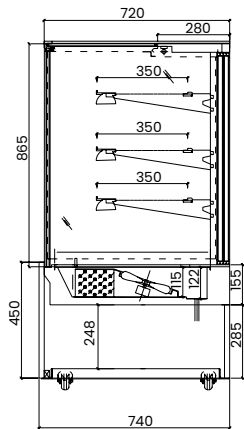

Code	Dimensions (WxDxH mm)	Net Capacity(L)	Weight (kg)	Temp Range (°C)	Voltage	Power (W/A)
H-SF820V	600x767x1350	370	140	+30 to +85	240	786/10
H-SF830V	900x740x1350	560	170	+30 to +85	240	1044/10
H-SF840V	1200x740x1350	740	200	+30 to +85	240	1314/10

To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.