



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Rancilio RC3G C5CRONO BLK CLASSE 5 CRONO USB TALL 3GR Espresso Machine

Model / SKU: RC3G C5CRONO BLK

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/RC3G_C5CRONO_BLK_AN.pdf

Classe 5 Crono USB Tall - RC3G C5CRONO BLK

RANCILIO CLASSE 5 CHRONO USB TALL 3 GROUP



STANDARD FEATURES

- Tall deck accommodates tall cups up to 145mm in height includes retractable tray for espresso cups
- Steady Brew patented heat exchanger technology for outstanding temperature control
- Single hot water tap with manual operation
- Ergonomic portafilter holder up to 21g capacity, comfortable for all-day operation
- C-Lever – quarter turn steam tap features two positions: purge (down) or fully open (up)
- Integrated digital display with shot timer for each group
- Hydro hub – integrated manifold for precise water delivery and distribution
- Multifunction onboard computer and USB port for simple programming and data transfer
- Water pump pressure control gauge that keeps you in control
- Built-in volumetric rotary vane water pump for simple and safe installation
- Steam boiler pressure control with mechanical pressure stat
- Automated cleaning programme simplifies your daily clean

OVERALL CONSTRUCTION

- Hand rolled copper steam boiler - 16 litre capacity
- Brushed stainless steel front and rear panels
- Anthracite black ABS nylon side panels
- Backflow valve on boiler and steam tap
- Adjustable feet with optional extensions

CONTROLS

- Soft-touch keypads with 4 programmable drink dosing pre-sets for easy espresso preparation
- White LED backlights easy to read keypad buttons
- Two manual steam wands for frothing and steaming milk

CLEANING AND MAINTENANCE

- Stainless steel drip tray - dishwasher safe
- Easy Clean manages the cleaning process of group heads to perform automatically
- Genuine cleaning products sold separately

INCLUDES

- 1 x Single group handle
- 1 x Single filter basket – 8.5g
- 3 x Double group handle
- 3 x Double filter basket – 20g
- 1 x Stainless steel blind filter basket
- 1 x Group head cleaning brush
- User manual / Warranty card

MATCHING PRODUCTS



CLASSE 5 USB
TALL 1 GROUP



CLASSE 5 CRONO USB
TALL 2 GROUP COMPACT



CLASSE 5 CRONO USB
TALL 2 GROUP



CLASSE 7 USB
TALL 2 GROUP



CLASSE 7 USB
TALL 2 GROUP ISTEAM



CLASSE 7 USB
TALL 3 GROUP



KYRO EVO

Classe 5 Crono USB Tall - RC3G C5CRONO BLK

RANCILIO CLASSE 5 CHRONO USB TALL 3 GROUP

TECHNICAL INFORMATION

Dimensions

Width: 1010mm
Depth: 539mm
Height: 519mm
Nett weight: 85kg
Boiler Capacity: 16 litres

ELECTRICAL

Power requirements: 240V, 1P+N+E,
50/60Hz, 6.64kW, 32A cordset fitted
Boiler Power: 6kW



WATER CONNECTIONS AND DRAINS

- 40mm PVC drain and waste trap - 300mm upstand
- Fixed water supply connection
- Mains cold water 3/8" BSP male thread connection
- Flow pressure: 200kPa -500kPa, min 4L/min



Australia

www.moffat.com.au

New Zealand

www.moffat.co.nz

Australia

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +61 3-9518 3888

Facsimile +61 3-9518 3833

vsales@moffat.com.au

New South Wales

Telephone +61 2-8833 4111

nswsales@moffat.com.au

South Australia

Telephone +61 3-9518 3888

vsales@moffat.com.au

Queensland

Telephone +61 7-3630 8600

qldsales@moffat.com.au

Western Australia

Telephone +61 8-9413 2400

wasales@moffat.com.au

New Zealand

Moffat Limited

Christchurch

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150

sales@moffat.co.nz



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.




© Copyright Moffat Ltd
AN.RAN.2601

RANCILIO WATER SPECIFICATION

Optimum Parameter	Measurement Range
	Never more than 50 PPM more than to Total Hardness
TDS <135	
Carbonate Hardness 50 ppm	40-90 ppm
Total Hardness 85 ppm	50-100 ppm
pH (ideal) 7	6.5 – 8.5
Chlorides Cl -	< 30 ppm

INSTALLATION CLEARANCE

- Allow 152.4mm / 6" clearance on all sides of the machine.
- Allow 609mm x 127mm / 24" x 5" for in-line filter. Filter can be mounted behind the machine or under the counter.
- Allow a minimum of 3" (762 mm) clear space under filter to facilitate filter change.
- All services to be within 1m of machine placement
- Always refer to installation manual

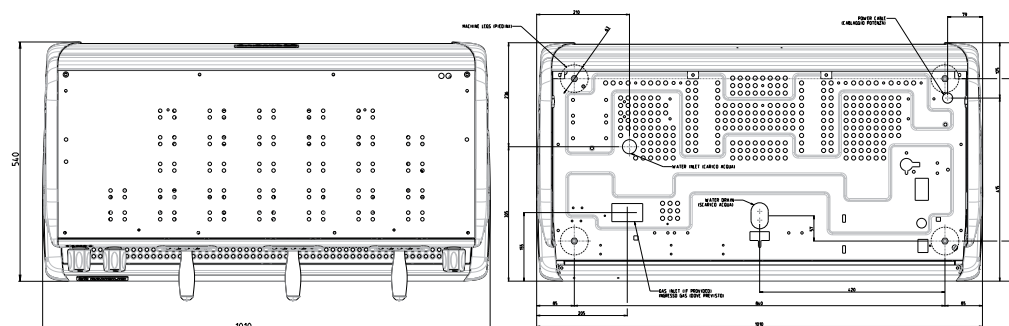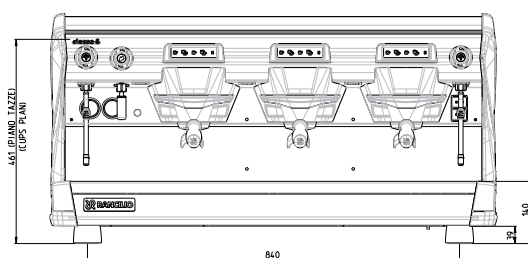

Specifications may vary between models

an Ali Group Company



The Spirit of Excellence