



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Waldorf 800 Series BM8450E - 450mm Electric Bain Marie 1/1 GN - 160mm Splash Back

Model / SKU: BM8450E

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/BM8450E_BMLB8450E_AN.pdf

Electric Bain Marie 450mm

BMB8450E, BMLB8450E



OVERALL CONSTRUCTION

- 25mm (1") pan drain valve
- Stainless steel pan
- Bull nose welded 1.5mm stainless steel
- Splashback and side panels 1.2mm stainless steel
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet

CONTROLS

- Large easy to use knob - heat resistant reinforced
- Mechanical on/off thermostat switch
- Auto reset over-temperature safety cut-out
- Indicator lights for power & heating
- Fine adjustment water faucet for pan filling

CLEANING AND SERVICING


- Open stainless steel pan for easy clean
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

- Heavy-duty construction
- High performance Bain Marie
- Easy clean 160mm stainless steel 1/1 GN pan
- 1.0kW externally mounted element
- Integrated water fill and water faucet
- Safety cut-out thermostat - empty pan
- Stainless steel exterior
- Vitreous enamel finish to front panels
- Easy clean
- Easy service
- Fully modular

Electric Bain Marie 450mm

BMB8450E, BMLB8450E

BMB8140E

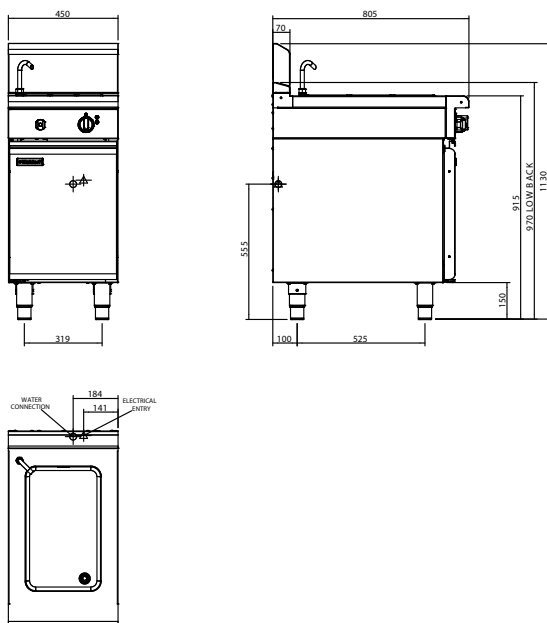

SPECIFICATIONS

Heating Element

1 x 1kW surface mount element

Electrical requirements

1.0kW, 220-240 Vac 50/60Hz,
P+N+E, 4.5A

3 pin 10A cordset fitted

Electrical connection

141mm from RH side,
555mm from floor

Water connection

Cold water connection

184mm from right hand side,

555mm from floor

R1/2 (BSP) male

550kPa 80psi maximum water pressure

Dimensions

Width 450mm

Depth 805mm

Height 915mm

Incl. low back 970mm

Incl. splashback option 1130mm

Nett weight

53kg

Packing data

0.58m3, 95kg

Width 865mm

Depth 490mm

Height 1350mm

OPTIONS AT EXTRA COST

Castors

Plinth mounting



moffat.com.au

moffat.co.nz

Australia

moffat.com.au

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +613-9518 3888

Facsimile +613-9518 3833

vsales@moffat.com.au

New South Wales

Telephone +612-8833 4111

nswsales@moffat.com.au

South Australia

Telephone +613-9518 3888

vsales@moffat.com.au

Queensland

Telephone +617-3630 8600

qldsales@moffat.com.au

Western Australia

Telephone +618-9413 2400

wasales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited

Rolleston

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150

sales@moffat.co.nz



Designed and manufactured by



ISO9001

All Blue Seal products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



Copyright Moffat Ltd.
AN.W8.2019

an Ali Group Company



The Spirit of Excellence