



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Washtech CD180 Rack Conveyor Dishwasher – 180 Racks/hr, 3-Stage

Model / SKU: CD180

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/Washtech%20CD180_AU.pdf

CD180

RACK CONVEYOR DISHWASHER

WASHTECH®



STANDARD FEATURES

- Capacity of 180 racks / 3,240 plates per hour
- Water consumption of 240L per hour
- 600mm pre-wash module with 1.5HP wash pump
- 1200mm single tank wash module with 2.0HP wash pump
- Single stage final rinse
- Easily maintained electromechanical controls
- Heavy-duty stainless steel construction and wash system
- Removable upper and lower heavy-duty stainless steel wash arm cassettes and rinse arms
- Full width, easily removable stainless steel wash filter trays
- Powerful drive with safety clutch
- Auto-start idles dishwasher when no racks are being washed.

- 2x 500mm dish rack (600 70028)
- 2x 500mm cup rack (600 70029)
- 2x cutlery container (C660503)
- 1x cutlery basket (C660508)

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	250-350kPa
Flow	20L per minute
Backflow prevention	DCV
Consumption	240L per hour*

B - Drainage

Connection	1.5" BSP male
Line	2.0" / 50mm minimum





C - Electrical	V	Hz	A/ph	Max kW
Three phase	400-415	50	27	18.00

F - Extraction

Typical minimum	170L/sec**
-----------------	------------

*Water consumption rates may vary based on site conditions.
**Requirements will vary by site, consult with a ventilation engineer.

Isolating switch must be within 1m of, and not directly behind, the machine.
Refer to operator manual for installation and operating instructions.

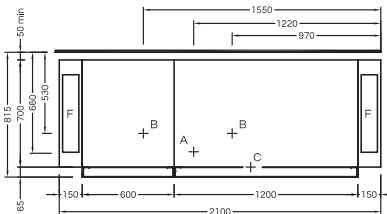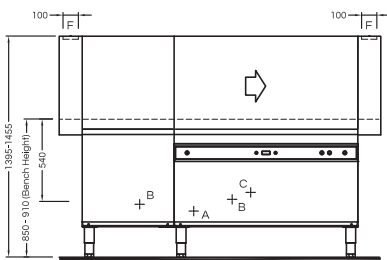

Dimensions

	Machine	Packed
Width (mm)	2100	2300
Depth (mm)	765	1000
Height (mm)	1455	1950
Weight (kg)	265	350
Volume (m3)		4.49

Water Quality

	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.1

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
© Copyright Washtech Limited / Washtech CD180 Series-3 / WCD180xxxx / Sep-25