

## **ch.bmhm.3 d4 datasheet**

SKU: CH.BMHM.3

Distributed by KW Commercial - [kwcommercial.com.au](http://kwcommercial.com.au)

Manufacturer documentation - (c) Culinaire

Retrieved: 2026-07-08

<https://www.kwcommercial.com.au/product/culinaire-ch-bmhm-3-hot-food-bain-marie-3-bay-mobile>


### Product Information

- Designed for wet or dry operation (temperature varies greatly when run dry, should not be left unattended for long periods of time)
- Temperature regulation via digital control, designed to hold product between 65°C - 90°C. Product must be pre-heated above 65°C before being placed into the bain marie hot cupboard
- Air insulated, double skinned tank for energy efficient heating, while minimising heat to external panels
- Hot cupboard features a fan forced heating system which offers energy efficiency, faster heat up times and even heat distribution
- Robust 304 grade stainless steel construction
- Manual fill and manual empty, valve operated waste
- Ergonomic stainless steel handle and wraparound bumper for easy and safe mobility
- Top mounted easy glide doors that do not sit in a bottom track, eliminates dirt trap with locking mechanism on door
- Heavy-duty non-marking 125mm swivel castors with brakes
- Manual fill and manual empty, valve operated waste
- Supplied with 2 x chrome plated steel wire shelves per door
- 1/1 GN sized well, fits pans up to 150mm deep (sold separately)
- Additional accessories sold separately, see below,
- **Stainless steel work shelf fitted to fold down brackets can be added as an optional extra at the time of ordering. This item is required to be factory fitted.**
- **2-month parts and labour warranty**



### Specifications

|                              |                                           |
|------------------------------|-------------------------------------------|
| <b>Model</b>                 | CH.BMHM.3                                 |
| <b>W x D x H (mm)</b>        | 1188 x 686 x 900                          |
| <b>Total Connected Load</b>  | 2.9kW                                     |
| <b>Electrical Connection</b> | 1Ø+N+E 240VAC / 50Hz<br>(15A plug & lead) |

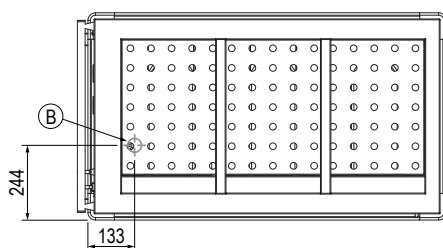

### Accessories

**Work Shelf** (factory fitted - If required, must be nominated at time of order) CA.WA.3

**Long Cross Pan Dividers** CA.PXL

**Short Cross Pan Dividers** CA.PXS

### Legend

- A** Electrical Connection  
**B** Waste Connection

