PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Giorik GL740TGCT 800mm - Gas Char Grill

Model / SKU: GL740TGCT

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au

Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /home/sarah/kw_system/07_Content_Library/product_db/supplier raw data/stoddart_extracted/9_Giorik/Data Sheets/Mo

GIORIK
INNOVATIVE COOKING EQUIPMENT SINCE 1963

GL740TGCT

Char Grill - Gas / Countertop


700



Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 700 series, high performance gas char grill (57.6 MJ/h)
- Piezo ignition burners with flame failure device and pilot burner
- Temperature regulation via variable power flame control
- Lava stone rack over burners spreads and radiates heat while vaporising fats for that authentic char grill taste
- Supplied standard with specialised V-shaped meat char plate to capture and drain fat to front drip tray while providing defined char markings
- Full fish char plate (SPGI.2009356) and 1/2 meat, 1/2 fish char plate (SPGI.2012437) sold separately
- Supplied with removable internal grease tray, ash drawer and 2 x 1/2 char plates
- Robust 304 grade stainless steel construction with rounded corners and splashguards
- Open base with optional doors available (SPGI.2016437)
- Height adjustable stainless steel feet for a 900mm working height
- 24-month warranty

General Drawing:

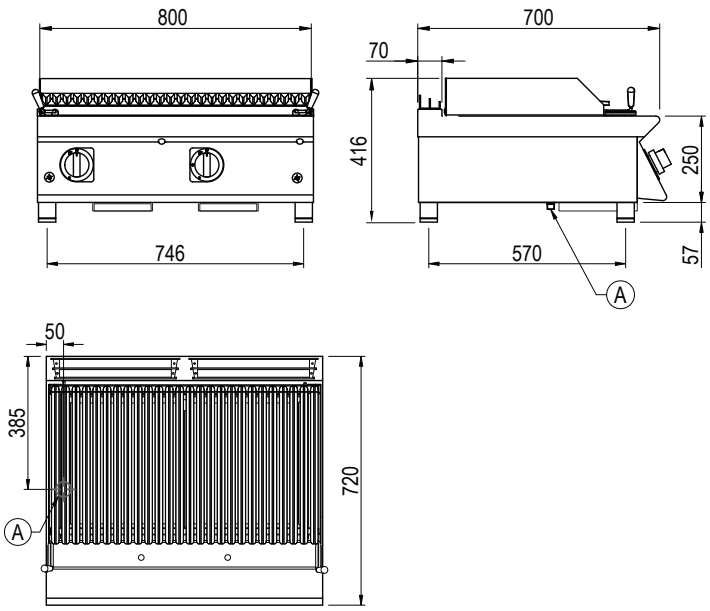

Specifications:

Model	GL740TGCT
W x D x H (mm)	800 x 720 x 416
Weight	70kg
Packed Dimensions (mm)	850 x 825 x 570
Packed Weight (mm)	80Kg

	Natural	Universal LPG
Gas Connection	1/2" BSP	1/2" BSP
Minimum Normal Test Gas Pressure	1.3 kPa	2.75 kPa
Maximum Normal Test Gas Pressure	3.5 kPa	3.5 kPa
Nominal Test Point Pressure	1.0 kPa	2.65 kPa
Total Nominal Gas Consumption	57.6 MJ/h	57.6 MJ/h

Note: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

Legend:

A	Gas Connection

Due to continuous product research and development,
the information contained herein is subject to change without notice.

Revision: A - 27/06/2024 - 02

www.stoddart.com.au
www.stoddart.co.nz

AUSTRALIA AND NEW ZEALAND GAS SAFETY CERTIFICATION

STODDART®