



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**Giorik FLG941GFT Cooktop On Stand – 800mm - Smooth Mild Steel Plate**

**Model / SKU: FLG941GFT**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE


The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.



**Product Information:**

- Class leading, European style, professional quality and reliability since 1963
- 900 series, gas frytop with 12mm smooth mild steel plate (64.8 MJ/h) (also available in 12mm ribbed mild steel plate)
- Piezo ignition burners with flame failure device and pilot burner
- Temperature regulation via variable power flame control
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Hermetically sealed, pressed work surface with raised edges to protect from overflow
- Removable 1/2 GN grease tray
- Open base with optional doors available (SPGI.2016437)
- Height adjustable stainless steel feet for a 900mm working height
- 24-month warranty

**General Drawing:**

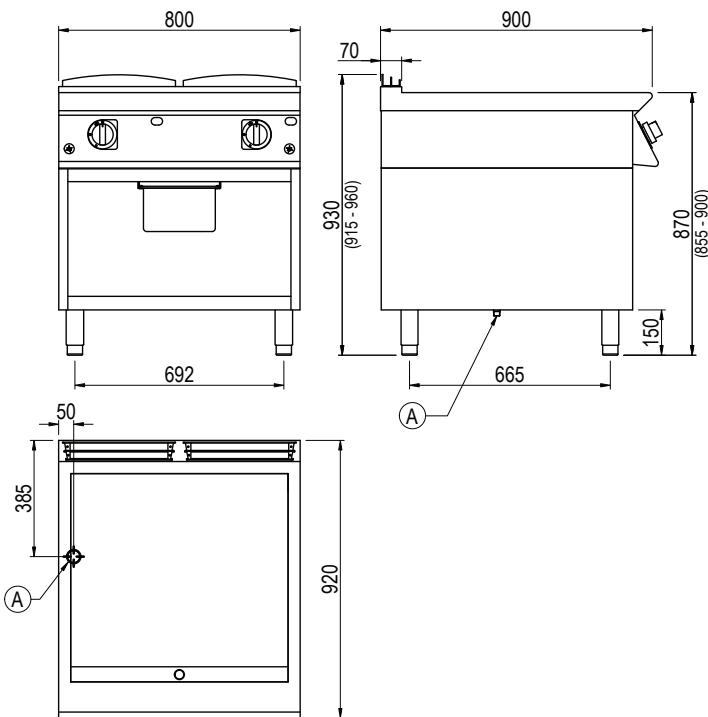

**Specifications:**

|                                         |                   |                      |
|-----------------------------------------|-------------------|----------------------|
| <b>Model - Smooth</b>                   | FLG941GFT         |                      |
| <b>Model - Ribbed</b>                   | FRG941GFT         |                      |
| <b>W x D x H (mm)</b>                   | 800 x 920 x 930   |                      |
| <b>Weight</b>                           | 175kg             |                      |
| <b>Cooktop (mm)</b>                     | 720 x 640         |                      |
| <b>Packed Dimensions (mm)</b>           | 845 x 1025 x 1200 |                      |
| <b>Packed Weight (mm)</b>               | 187kg             |                      |
|                                         | <b>Natural</b>    | <b>Universal LPG</b> |
| <b>Gas Connection</b>                   | 1/2" BSP          | 1/2" BSP             |
| <b>Minimum Normal Test Gas Pressure</b> | 1.3 kPa           | 2.75 kPa             |
| <b>Maximum Normal Test Gas Pressure</b> | 3.5 kPa           | 3.5 kPa              |
| <b>Nominal Test Point Pressure</b>      | 1.0 kPa           | 2.65 kPa             |
| <b>Total Nominal Gas Consumption</b>    | 64.8 MJ/h         | 64.8 MJ/h            |

**Note:** It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

**Legend:**

**A** Gas Connection

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: 01 - 05/01/2022 - A

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)

