KW COMMERCIAL KITCHEN

PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

TurboChef SPTC.HHC.2620.V Conveyor Oven – High h Conveyor - 48" Belt

Model / SKU: SPTC.HHC.2620.V

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au

Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /home/sarah/kw_system/07_Content_Library/product_db/supplier raw data/stoddart_extracted/15_TurboChef/Data Sheet

sptc.hhc.2620.v a3 datasheet

SKU: SPTC.HHC.2620.V

Distributed by KW Commercial - kwcommercial.com.au

Manufacturer documentation - (c) TurboChef

Retrieved: 2026-07-08

https://www.kwcommercial.com.au/product/turbochef-sptc-hhc-2620-v-conveyor-oven-high-h-conveyor-48-bel

TURBO CHEF HIGH h CONVEYOR 2620™

SPTC.HHC.2620.V

Product Information

- 7” intuitive capacitive touch screen with one-touch controls and icons, featuring durable tempered glass
- Variable-speed recirculating air impingement system and variable speed blower motors
- Idle mode for energy conservation
- Self-diagnostics for monitoring oven components and performance
- Independently-controlled top and bottom air impingement
- All stainless steel interior construction
- 660mm (26”) cook chamber opening
- 1227mm (48”) conveyor belt assembly with left or right feed conveyor belt direction (via software)
- Stackable design up to 3 high (requires stacking kit, sold separately)
- Includes two 150mm (6”) conveyor extensions
- External air filtration
- Easy to clean mono-finger design
- Cool to touch covers and panels

- **12-month warranty (Terms and conditions apply)**




Specifications

Model	SPTC.HHC.2620.V
Model - Split Belt	SPTC.HHC.2620.SPLIT.V
W x D x H (mm)	1526 x 1059 x 432
Weight	118kg
Belt Dimensions (mm)	660 x 1227
Split Belt Dimensions (mm)	318 x 1227 (each belt)
Opening (mm)	25 / 75
Total Connected Load	14.4kW (32A circuit*)
Electrical Connection	3Ø + N + E 380-415VAC / 50Hz IEC, 5-pin, 32A plug and lead fitted (1.8m)


*Circuit required to be determined at installation by a qualified electrician.


Shipping	Box: 1372 x 1219 x 660 / 156kg Crate: 1493 x 1295 x 686 / 204kg

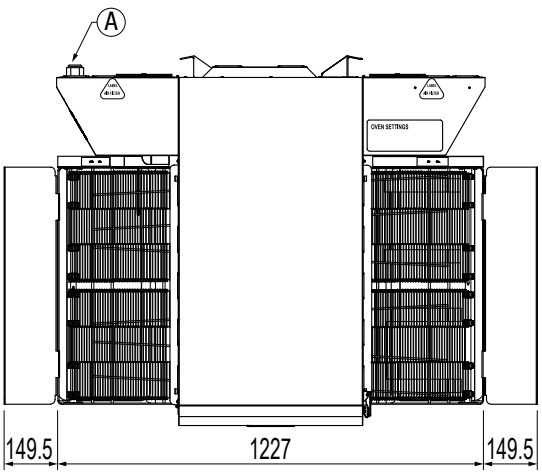

Legend

A Electrical Connection

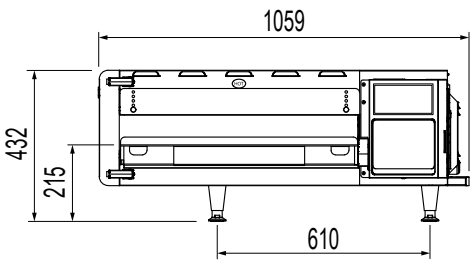

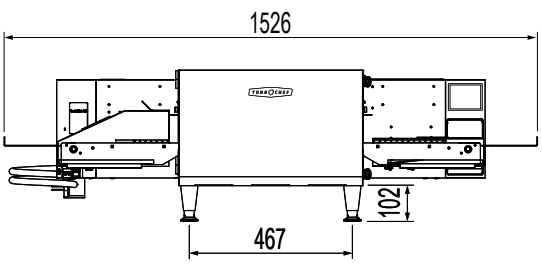

www.stoddart.com.au
www.stoddart.co.nz

Revision: A - 16/04/2025 - 03

Due to continuous product research and development,
the information contained herein is subject to change without notice.