KW COMMERCIAL KITCHEN

PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Blue Seal Evolution Series EB45D 450mm Electric Bain Marie

Model / SKU: EB45D

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au

Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/EB45D_AN.pdf

ELECTRIC BAIN MARIE **450mm**

EB45D

OVERALL CONSTRUCTION

- Bull nose welded 1.5mm 304 stainless steel
- Stainless steel pan
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- 25mm (1") pan drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet

CONTROLS

- Large easy to use knob - heat resistant reinforced
- Mechanical on/off thermostat switch
- Auto reset over-temperature safety cut-out
- Indicator lights for power & heating
- Fine adjustment water faucet for pan filling

CLEANING AND SERVICING

- Open stainless steel pan for easy clean
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

- Heavy-duty contruction
- High performance Bain Marie
- Easy clean 160mm stainless steel 1/1 GN pan
- 1.0kW externally mounted element
- Intergrated water fill and water faucet
- Safety cut-out thermostat - empty pan
- Stainless steel exterior
- Vitreous enamel finish to front panel
- Easy clean
- Easy service
- Fully modular

ELECTRIC BAIN MARIE **450mm**

EB45D

EB45D

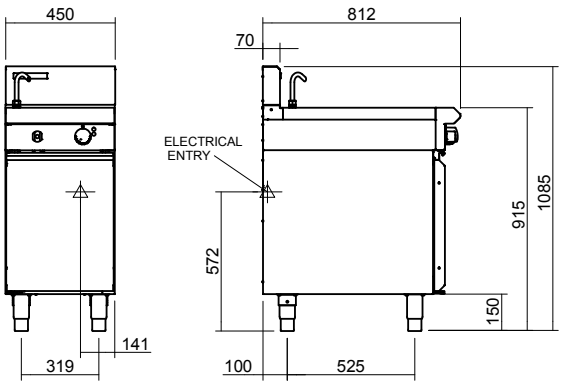



SPECIFICATIONS

Heating Element
1 x 1kW surface mount element

Electrical requirements
1.0kW, 220-240 Vac 50/60Hz,
P+N+E, 4.5A
3 pin 10A cordset fitted

Electrical connection
141mm from RH side,
555mm from floor

Water connection
Cold water connection
184mm from right hand side,
555mm from floor
R1/2 (BSP) male
550kPa 80psi maximum water pressure

Dimensions
Width 450mm
Depth 805mm
Height 915mm
Incl. splashback option 1085mm

Nett weight
53kg

Packing data
0.58m3, 95kg
Width 865mm
Depth 490mm
Height 1350mm

OPTIONS AT EXTRA COST

Castors
Plinth mounting

MOFFAT

moffat.com.au
moffat.co.nz

Australia
moffat.com.au

Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +612-8833 4111
nswsales@moffat.com.au

South Australia
Telephone +613-9518 3888
vsales@moffat.com.au

Queensland
Telephone +617-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone +618-9413 2400
wasales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited

Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz

24:7 Service Support

ISO9001 Quality Management Standard

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.BSE.01.19/1620