



# HB2USBHC

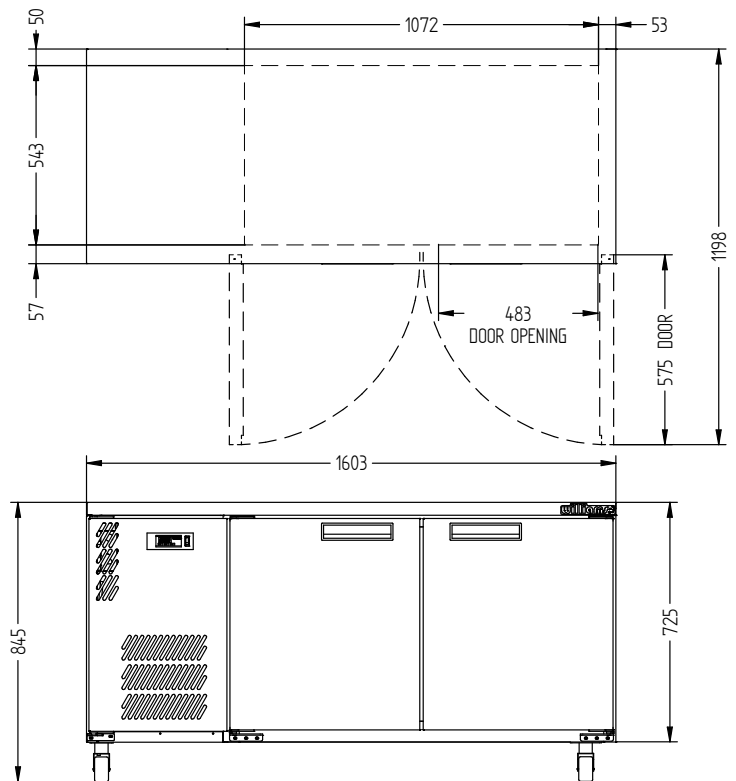

|          |                              |
|----------|------------------------------|
| CATEGORY | GENERAL COUNTERS & BACK BARS |
| RANGE    | <b>Boronia</b>               |
| UNIT     | REFRIGERATOR                 |
| TYPE     | SELF CONTAINED               |
| DOORS    | 2                            |



## SPECIFICATIONS

|                                                 |                        |
|-------------------------------------------------|------------------------|
| CAPACITY LITRES                                 | 360                    |
| TEMPERATURE                                     | 1°C / 4°C              |
| FRONT BREATHING                                 | YES                    |
| DIMENSIONS - W X D X H (ON 120 MM H CASTORS) MM | 1603 W x 650 D x 846 H |
| WEIGHT UNPACKED (KG)                            | 140                    |

## STANDARD INCLUSIONS \*\*\*

|                                                         |                                                              |
|---------------------------------------------------------|--------------------------------------------------------------|
| DOOR TYPE                                               | Standard: S (Solid Door)                                     |
| FINISH (INTERIOR AND EXTERIOR EXCLUDING REAR AND UNDER) | B (Black with stainless steel countertop and internal floor) |
| SHELVES/DOOR (ADJUSTABLE STRIPS AND CLIPS)              | 2                                                            |

## GAS TYPE

|             |      |
|-------------|------|
| REFRIGERANT | R290 |
|-------------|------|

## ELECTRICAL

|                             |        |
|-----------------------------|--------|
| POWER SUPPLY                | 10 amp |
| POWER CABLE LENGTH (METRES) | 2      |
| RUNNING AMPS                | 1.6    |

## PERFORMANCE

|                 |                         |
|-----------------|-------------------------|
| KWH/24H READING | 4.3                     |
| TEST STANDARD   | EN 16825 (Professional) |
| TEST CONDITIONS | 4 M1                    |
| AMBIENT RATING  | 40°C                    |

\*\*\* For **OPTIONS** refer to the current Williams Price Guide