



Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
C-I945 400V 3~

19097582

26/09/2024

DENOMINATION:


"- 6 mm thick glass ceramic, hermetically sealed into the 2 mm thick AISI-304 stainless steel surface top.
- Laser-cut joints, automatic welding and polishes. Screws hidden from view.
- Perfect control of cooking thanks to the energy regulator with 10 power levels, which allows you to work at low power for delicate recipes or at maximum power for fast service.
- Supplies energy only to the area upon which the container rests, with the rest of the glass ceramic surface remaining cold.
- Only functions when the presence of a cooking container is detected. Heating is interrupted upon removing the container.
- As a result, a great energy saving is obtained (energy consumption is reduced by around 50 % compared to gas burners).
- The working environment and atmosphere is more comfortable, as the energy is concentrated on the base of the container to be heated, irradiation and heat dispersal are reduced and the cooking temperature is reached rapidly.
- Safety against overheating. Diagnosis of errors (flashing lights).
- High temperature enamelled cast iron flue protector.
- Access to the components from the front.
- Machines with IPX5 grade water protection.

"

- Cooking areas demarcated by Ø 280 mm circular screen print, with 5 kW of power in each area, rapidly heated and ideal for à la carte service.

DIMENSIONS

X Width	800 mm	X Gross width	840 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	290 mm	Z Gross height	535 mm
Net Weight	85,0 kg	Gross Weight	101,0 kg
Net volume	0,220 m3	Gross volume	0,459 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage	400V
Phases	3~
Electric frequency	50/60Hz
Amperage (A)	32A
Heating power	20,00 kW




Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
C-I945 400V 3~


19097582

26/09/2024


C-I925

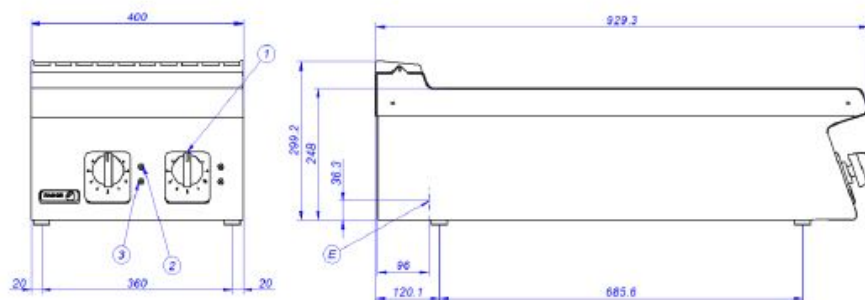

C-I945

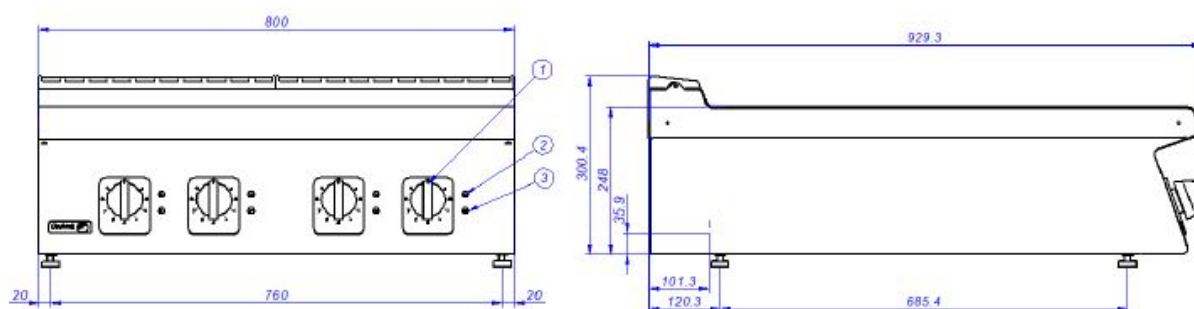

W-I905

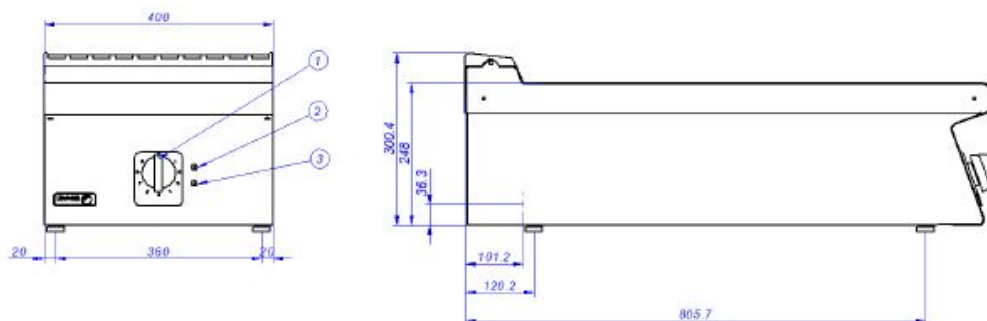

E – Conexión eléctrica
1 – Mando eléctrico
2 – Piloto verde
3 – Piloto ambar

Electrical connection
Electric control
Green pilot
Ambar pilot