



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Tecnodom CN90E Curved Glass Deli Display – 90° Corner Showcase

Model / SKU: CN90E

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page


DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/1563/product/4024/>

PANAREA

VENTILATO (V) - VENTILATED (V)

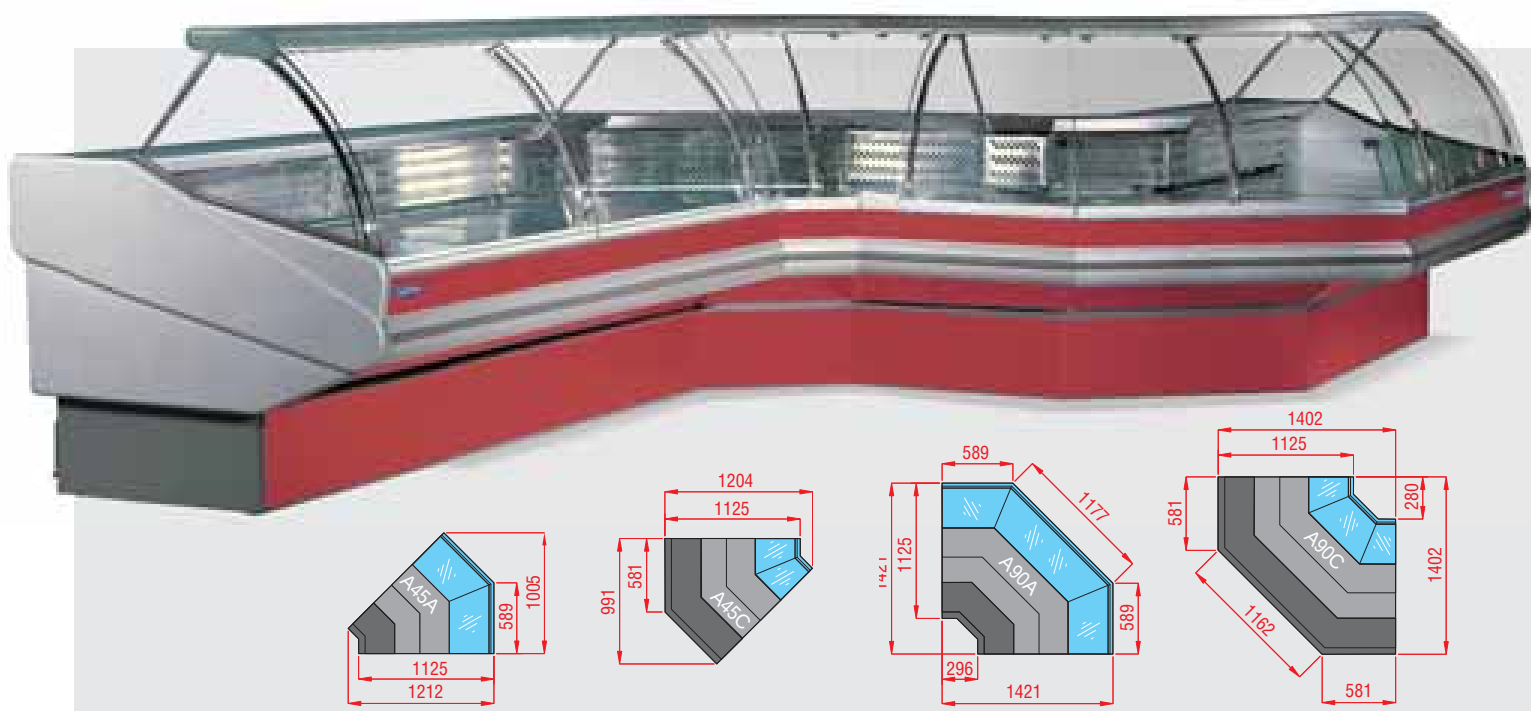


Temperatura - Temperature: 0/+2°C		100	150	200	250	300	350
Lunghezza comprese le spalle spessore 50 mm cad. Lenght (included Side-walls 50 mm thick each)	mm	1060	1540	2020	2500	2980	3700
Potenza elettrica complessiva (senza accessori) gruppo incorporato Total absorbed power (without accessories) built-in unit	W	455	615	658	854	985	1198
Potenza elettrica complessiva (senza accessori) gruppo remoto Total absorbed power (without accessories) remote version	W	1092	1612	2017	2573	3065	3818
Potenza elettrica assorbita dall'illuminazione Power absorbed by lighting	N°/W	1x18	1x36	1x36	2x36	2x36	2x58
Optional : Potenza assorbita luce mensola intermedia Optional: Power absorbed by intermediary lighting	N°/W	1x18	1x36	1x36	2x36	2x36	2x58
Potenza frigorifera per gruppo remoto Watt T.evap -10°C Refrigerating powers for remote units Watt T.Evap -10°C	W	400	600	800	1000	1200	1450
Volume in litri riserva Reserve volume	L	156	234	312	390	468	546
Numero sportelli (luce sportello 240x555 mm) Storage door quantity (net size 240x555 mm)	n°	1	2	2	3	4	4
Superficie di esposizione Ventilato Display area Ventilated	m²	0,84	1,26	1,68	2,10	2,52	3,15
Peso complessivo (con imballo standard) Total weight (with standard packing)	Kg	130	170	210	250	285	320

TECNODOM

Espositori refrigerati orizzontali

Horizontal serve-over displays

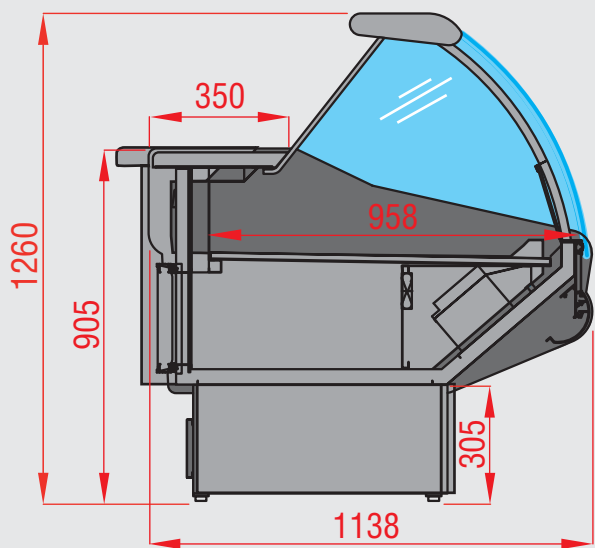

PANAREA^{AV}
VENTILATO
VENTILATED



400	450	500	550	600	A90A	A90C	A45A	A45C
3940	4420	4900	5380	5860	1440 no spalle no side walls	1440 no spalle no side walls	-	-
1316	1512	1708	1839	1970	499	464	-	-
4034	4590	5146	5638	6130	790	1102	-	-
2x36	3x36	4x36	4x36	2x36	1x18	1x18	-	-
2x36	3x36	4x36	4x36	2x36	1x18	1x18	-	-
1600	1800	2000	2200	2400	400	400	-	-
624	702	780	858	936	188	271	-	-
4	5	6	7	8	1	1	-	-
3,36	3,78	4,20	4,62	5,04	1,35	1,35	-	-
420	460	500	535	570	120	120	-	-



Vetrina refrigerata ventilata, canalizzabile

CARATTERISTICHE:

- Fiancate (spessore 50 mm) in termo-plastica antiurto, coibentate, con finiture estetiche di grande effetto
- Piano espositivo in acciaio inox
- Struttura superiore con vetri panoramici curvi temperati sollevabili con pistoni e montanti cromati
- Plafoniera con illuminazione neon
- Sistema antiappannamento con vetri antibirina e resistenza bordo vetro
- Ampio piano di lavoro in acciaio inox
- Grande superficie espositiva con visibilità ottimale
- Vasca interamente in acciaio inox
- Riserva refrigerata a sportelli
- Vaschetta evapora-condensa automatica solo nella versione a gruppo incorporato.
- Sbrinamento gas caldo (versioni CG)
- Sbrinamento elettrico (versioni SG)

VERSIONI DISPONIBILI:

- Con gruppo incorporato (CG, Gruppo remoto (SG), Neutro (N))
- Libero servizio (Self)
- Angoli refrigerati interni ed esterni, a 45° e 90°
- Personalizzazioni su richiesta

Multiplexable serve-over refrigerated counter

FEATURES:

- Foamed, thermoplastic (50 mm thick each) side-walls, with impressive appearance
- Stainless steel display
- Upper structure with panorama liftable curved tempered glass and rear chrome-plated posts
- Neon lighting
- Anti-water condensation glass and frontal side gasket with anti-fog heater
- Large stainless steel working shelf
- Wide display surface for optimal visibility
- Fully stainless steel belly
- Refrigerated storage with doors
- Automatic water evaporating tray included only for built-in version
- Hot gas defrosting system (CG version)
- Electric gas defrosting system (SG version)

AVAILABLE VERSIONS:

- With built-in unit (CG), remote unit (SG), Neutral (N)
- Self-service (Self)
- Inside and outside refrigerated corners, 45° and 90°
- Customization on demand

