



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Hoshizaki 91000905 KMD-270AB Crescent Cube Ice Machine - Head Unit Only

Model / SKU: 91000905


KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /media/products/21230/documents/hoshizaki-91000905-spec-sheet-b33db31fe15a__kw.pdf



HOSHIZAKI

KMD-270AB


Crescent 255kg Ice Maker - Modular

Model Number
91000905

PRODUCT FEATURES

- Individually shaped crescent ice.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver® technology includes a double-sided evaporator, uniquely crafted in stainless steel, which produces ice on both sides, resulting in more ice in less amount of time.
- EverCheck Control board with audible alarm and diagnostic features, designed to assist services technicians in diagnosing problems.
- Durable stainless-steel exterior.
- Easily removable & cleanable air filters on front panel.
- Ice storage bin, top kit and water filter sold separately.

TECHNICAL DRAWING

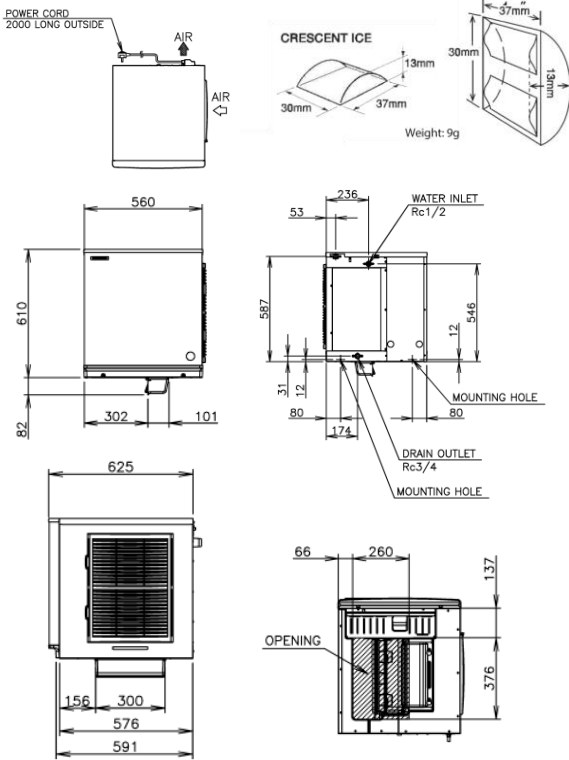

PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 255kg @ 21°C Air temp; 15°C Water
Recommended Storage Bins	Approx. 221kg @ 32°C Air temp; 21°C Water
Freeze Cycle Time	B-301 SA B-501 SA B-801 SA B-1300 SS B-1500 SS
Ice Production / cycle	Approx. 26.8 Min (At. 21°C Air ; 15°C Water)
Dimensions	Approx. 5.3kg / 572pcs
Cooling	560mm (W) x 625mm (D) x 610mm (H)
Weight Net/Gross (kg)	Air
Refrigeration System	57/73
AC Supply Voltage	Forced Air Circulation
Amperage	1 PHASE 220-240V 50Hz
Refrigerant Charge	Running: 4.9A Starting: 24A
Operating Conditions:	R404A/780g
Ambient Temp	
Water Supply Temp	7-40°C
Water Supply Pressure	7-35°C
Voltage Range	0.07-0.8MPa (0.7-8bar)
Electrical consumption	±6%
Water Consumption / 24hrs	984W (AT. 32°C; WT 21°C)
GEMS Number	Approx. 0.55m³/d(AT. 21°C ; WT 15°C)
	AIM0002

INSTALLATION REQUIREMENTS

- Qualified plumber required for installation.
- Included accessories & fittings pack can be found behind front panel.
- Allow 30cm clearance at rear, sides and top for proper air circulation and ease of maintenance.
- Install bin control switch according to installation manual.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications

*Refer to manual for full installation & maintenance requirements.



For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au



Descriptions and specifications are subject to change at any time, without notice.
Illustrations for demonstration purposes. Copyright © 2023 Hoshizaki Lancer Pty Ltd. All right reserved.