



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Hoshizaki 97000942 RT-156MA-A-ML 2 Door Pillarless Under Counter Fridge – 1500mm

Model / SKU: 97000942

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page


DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /media/products/21257/documents/hoshizaki-97000942-spec-sheet-59b3b6171a44__kw.pdf



ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RT-156MA-A-ML
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.5kVA (2.5A)
AMPERAGE	Rated 2.0A
ELECTRIC CONSUMPTION	245W Heater 189W Defrost 165W
HEAT REJECTION	*W
POWER CORD	2.0m (Plug with Earth Wire)
EFFECTIVE CAPACITY	318L
OUTSIDE DIMENSIONS	1500mm (W) x 600mm (D) x 815 mm (H)
INSIDE DIMENSIONS	1140mm (W) x 436mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)
INTERIOR	Stainless Steel, ABS Plastic (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic
CONDENSER	Wire and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R134a
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
CASTER	Urethane (76mm DIA, 115mm HIGH)
SHELF	4pcs.
WEIGHT	Net: 81kg (Gross: Approx. 86kg)
PACKAGE	Carton 1565mm (W) x 680mm (D) x 790mm (H)
ACCESSORIES	-
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage±6%

- *We reserve the right to make changes in specifications and design without prior notice.
1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz.
The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.
 3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.
 4. Product code: T265-C410 (HLP)

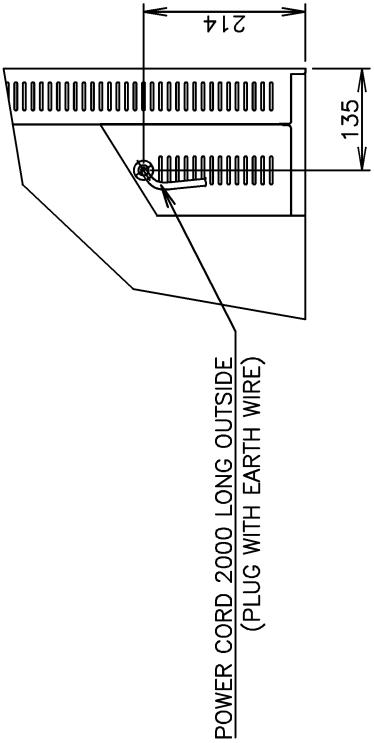

POWER CORD 2000 LONG OUTSIDE
(PLUG WITH EARTH WIRE)

VIEW A

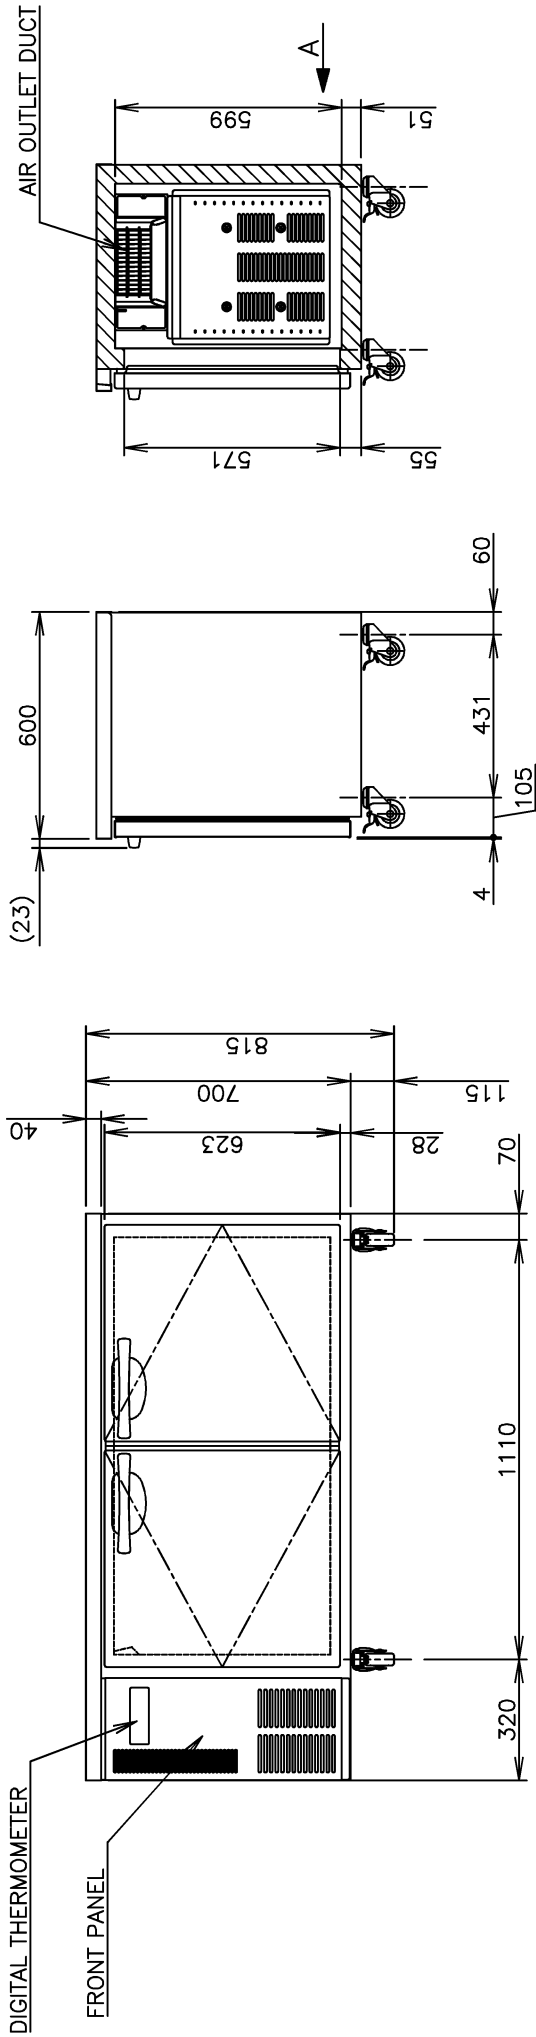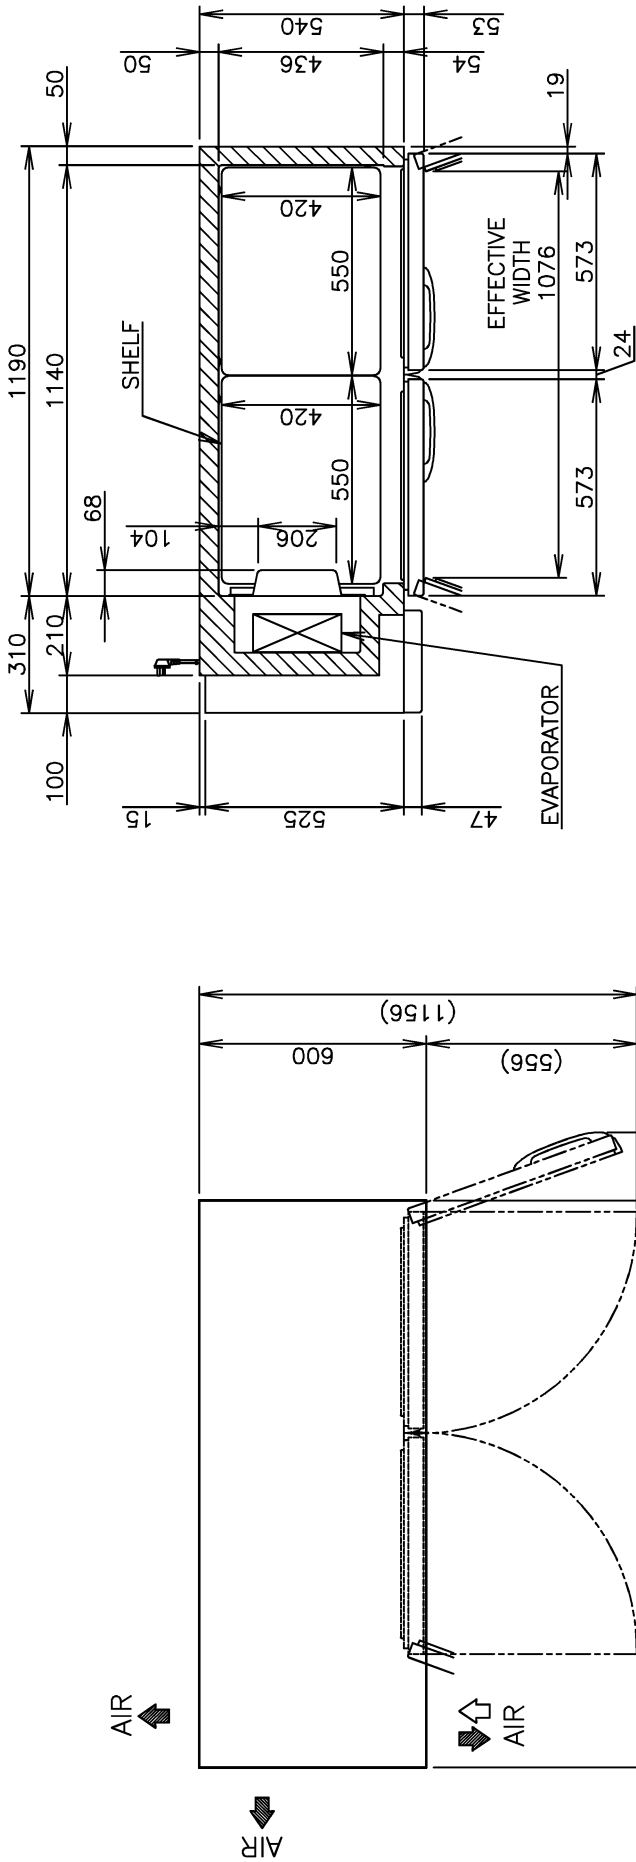

HOSHIZAKI UNDERCOUNTER REFRIGERATOR RT-156MA-A-ML

APPROVED	CHECKED	DESIGNED	DRAWN	SCALE	1/20	TRIGONOMETRY
KUROYANAGI	LIANG	LIANG	WANGXIN			
*	*	*	*	DATE	2022.06.30	DRAWING NO. D34047
APPROVED	DESIGNED	SYMBOL	DATE			SYMBOL