



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Hoshizaki 91000116 DCM-60KE-P Ice & Water Dispenser – 50kg Cubelet Ice | KW

Model / SKU: 91000116


KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /media/products/53635/documents/hoshizaki-91000116-spec-sheet-64f3d1413cbb__kw.pdf

HOSHIZAKI

OPERATING CONDITION		Ambient Temp.: 5-40° C, Water Supply Temp.: 5-35℃ Water Supply Pressure: 0.05-0.78MPa Voltage Range: Rated Voltage±6%	ITEM	HOSHIZAKI CUBELET ICE DISPENSER	
*We reserve the right to make changes in specifications and design without prior notice. 1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. 2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual. 3. The amperage and electric consumption are based on measurements with the ice dispensing solenoid off. 4. Product Code: L014 L014-C101 L014-C201 L014-C301			MODEL	DCM-60KE-P	
			POWER SUPPLY	1 Phase 220 - 240V 50Hz Capacity: 0.60kVA (2.6A)	
			AMPERAGE	1.5A Starting: 9.5A	
			ELECTRIC CONSUMPTION	280W (Power Factor: 81%)	
			ICE PRODUCTION PER 24h	Approx. 60kg (Ambient Temp. 10℃, Water Temp. 10℃) Approx. 50kg (Ambient Temp. 21℃, Water Temp. 15℃) Approx. 38kg (Ambient Temp. 32℃, Water Temp. 21℃)	
			SHAPE OF ICE	Cubelet(Compressed Flake Ice)	
			STORAGE CAPACITY	Approx. 1.9kg	
			ICE DISPENSING RATE (40g/CUP)	Approx. 78cups/30min (Ambient Temp. 10℃, Water Temp. 10℃) Approx. 110cups/1hour(Ambient Temp. 10℃, Water Temp. 10℃) Approx. 73cups/30min (Ambient Temp. 21℃, Water Temp. 15℃) Approx. 99cups/1hour (Ambient Temp. 21℃, Water Temp. 15℃) Approx. 67cups/30min (Ambient Temp. 32℃, Water Temp. 21℃) Approx. 87cups/1hour (Ambient Temp. 32℃, Water Temp. 21℃)	
				WATER CONSUMPTION PER 24h	Approx. 0.060m³(Ambient Temp. 10℃, Water Temp. 10℃) Approx. 0.050m³(Ambient Temp. 21℃, Water Temp. 15℃) Approx. 0.038m³ (Ambient Temp. 32℃, Water Temp. 21℃)
				OUTSIDE DIMENSIONS	350mm(W)× 585mm(D)× 695(~710)mm(H)
				INSULATION FOAM BLOWING AGENT	HFC-free
△		HEAT REJECTION	460W (Ambient Temp. 32℃, Water Temp. 21℃)		
		EXTERIOR	Stainless Steel(Side, Rear) ABS Molding(Front, Top, Drain Pan)		
		ICE MAKING SYSTEM	Thin ice forming inside Cylinder		
		CONNECTIONS-ELECTRIC	Y-Type Connection with CONT. Plug (L014) with UK. Plug (L014-C101) with OCEANIA. Plug (L014-C201) with CHINA Plug (L014-C301)		
△		CONNECTIONS-WATER SUPPLY	Direct Connection to Water Main, Inlet G3/4(Bottom)		
		CONNECTIONS-DRAIN	Drain Hose, I.D. ϕ 25mm(Bottom)		
		HARVESTING SYSTEM	Direct driven Auger		
		ICE DISPENSING SYSTEM	Push Switch and Solenoid(with Select Switch) Portion control by Dispense Switch		
		WATER DISPENSING SYSTEM	Push Switch and Water Valve (with Select Switch) Portion control by Dispense Switch		
		COMPRESSOR	Hermetic		
		CONDENSER	Fin and Tube type, Air-cooled		
		EVAPORATOR	Tube coiled around Cylinder (Solder Plated)		
		REFRIGERANT	R134a/210g		
		BIN CONTROL	Mechanical Bin Control (Time Delay Controlled)		
		ICE MAKING WATER CONTROL	Float Switch and Water Valve		
		ELECTRICAL CIRCUIT PROTECTION	10A Circuit Breaker		
		REFRIGERANT CIRCUIT PROTECTION	Compressor Internal Thermostat Condensing Temperature detected by Thermistor(Auto-reset)		
		INTERLOCK	Shutdown by Microprocessor (Manual-reset)		
		WEIGHT	Net: 47kg(Gross: 56kg)		
PACKAGE	Carton 440mm(W)× 655mm(D)× 906mm(H)				
ACCESSORIES	Installation Kit, Brush				

585



AIR

380

444

34

DRAIN HOSE L1000 (I.D. ϕ 25)

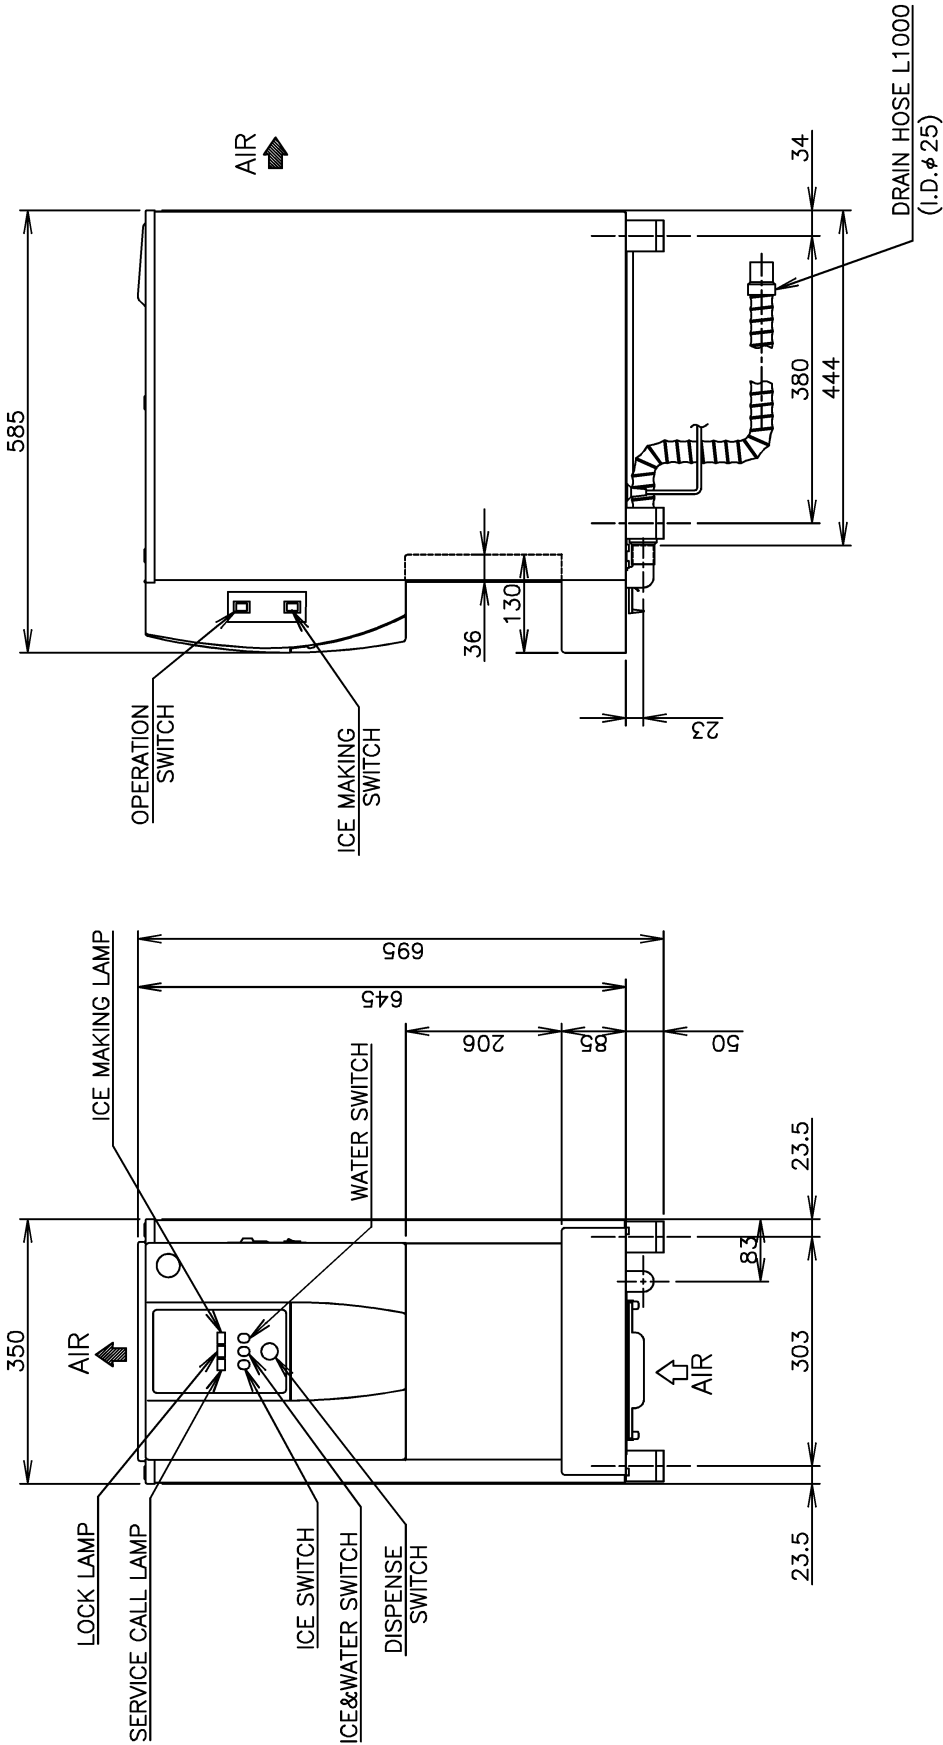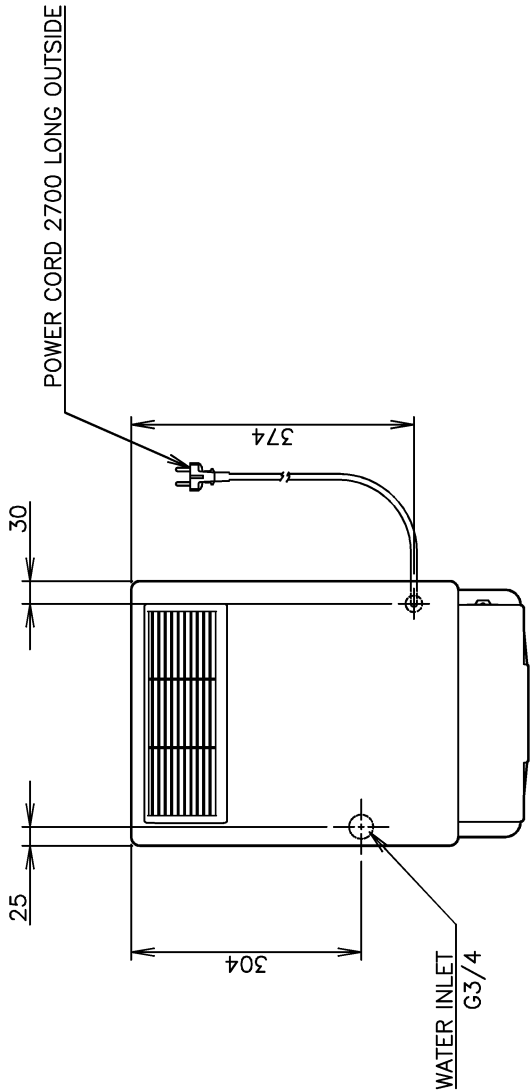

HOSHIZAKI CUBELET ICE DISPENSER DCM-60KE-P

APPROVED	CHECKED	DESIGNED	DRAWN	SCALE	1/10	TRIGONOMETRY
YOSHIDA	KUROYANAGI	HIRANO	WATANABE	DATE	2012.02.20	DRAWING NO. D11050
KUROYANAGI	MIZUTANI	DATE	2016.12.15	DATE	2012.02.20	SYMBOL
APPROVED	DESIGNED	SYMBOL				