



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Hoshizaki HF-128MA-A Upright Freezer | 1,047L Split Door Commercial Freezer Australia

Model / SKU: HF-128MA-A

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au





Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.


Official supplier source: /media/products/55957/documents/hoshizaki-hf-128ma-a-spec-sheet-40dc5cb835a5__kw.pdf

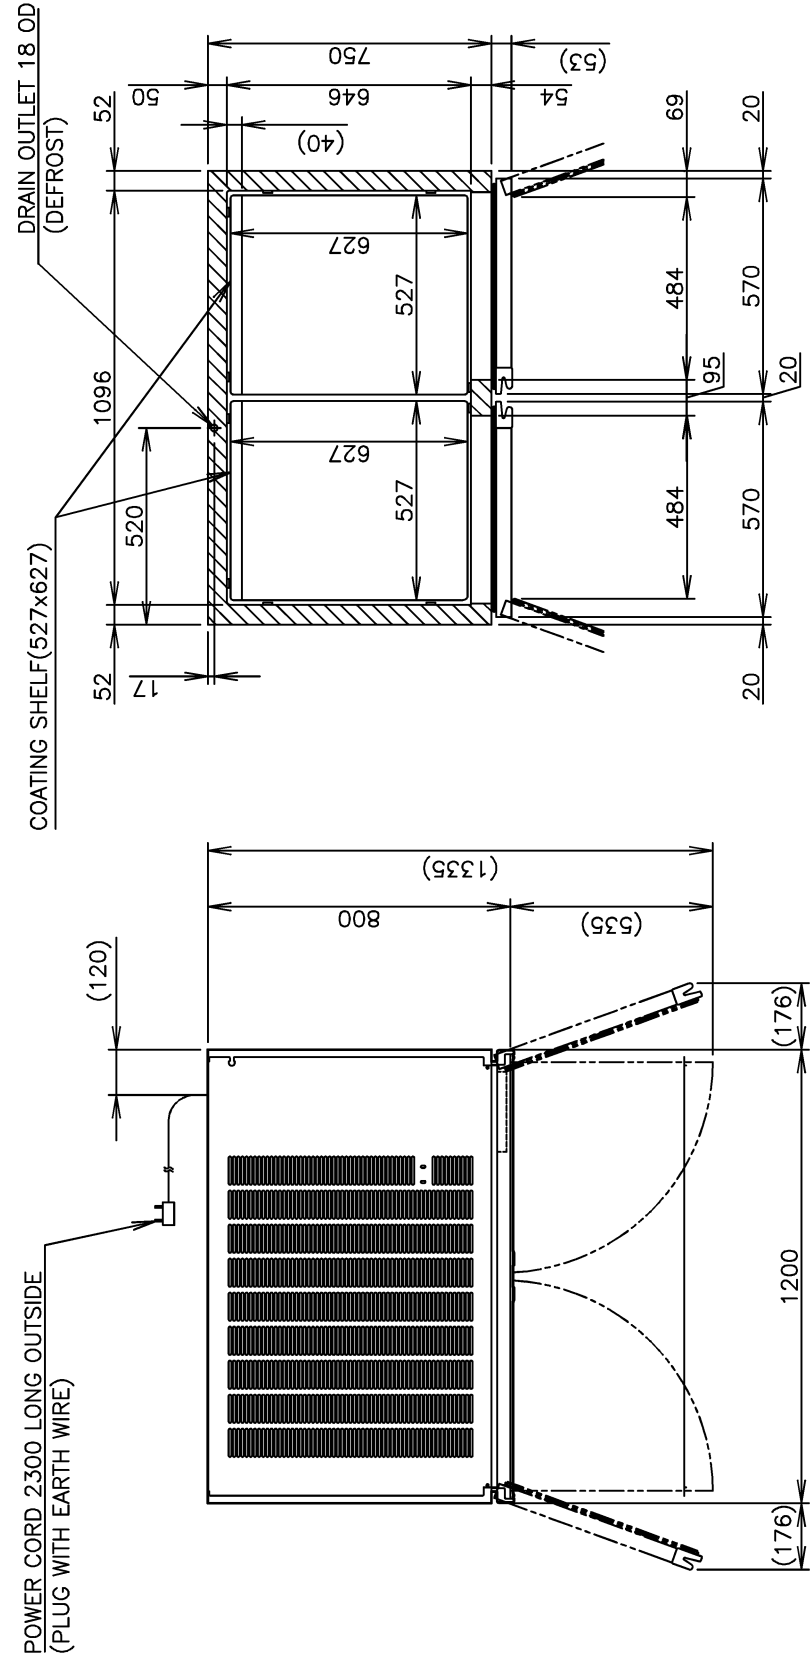

ITEM	Hoshizaki Reach-in Freezer
MODEL	HF-128MA-A
POWER SUPPLY	1 Phase 220 - 240V 50Hz Capacity: 1.02kVA (4.64A)
AMPERAGE	Rated: 4.9A Starting: 15.6A
ELECTRIC CONSUMPTION	700W Heater: 474W Defrost: 474W
HEAT REJECTION	*W
POWER CORD	2.3m (Plug with Earth Wire)
EFFECTIVE CAPACITY	1047L
OUTSIDE DIMENSIONS	1200mm(W) x 800mm(D) x 2015mm(H)
INSIDE DIMENSIONS	1096mm(W) x 646mm(D) x 1484mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel(Top, Rear, Bottom)
INTERIOR	Stainless Steel, ABS Plastic(Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Heater
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube type
REFRIGERANT	R404A
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -23 to -7°C
DEFROST CONTROL	Microprocessor
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker
REFRIGERANT CIRCUIT PROTECTION	Motor Protector (Auto-reset)
CASTER	Urethane (76mm DIA, 115mm HIGH)
SHELF	8 pcs.
WEIGHT	149kg (Gross 180kg)
PACKAGE	Carton (Wooden Pallet) 1260mm(W) x 900mm(D) x 2075mm(H)
ACCESSORIES	
OPERATING CONDITIONS	Ambient Temperature: 5 - 43°C Voltage Range: Rated Voltage ±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C.
3. Product Code: R595-C400 (HLP)

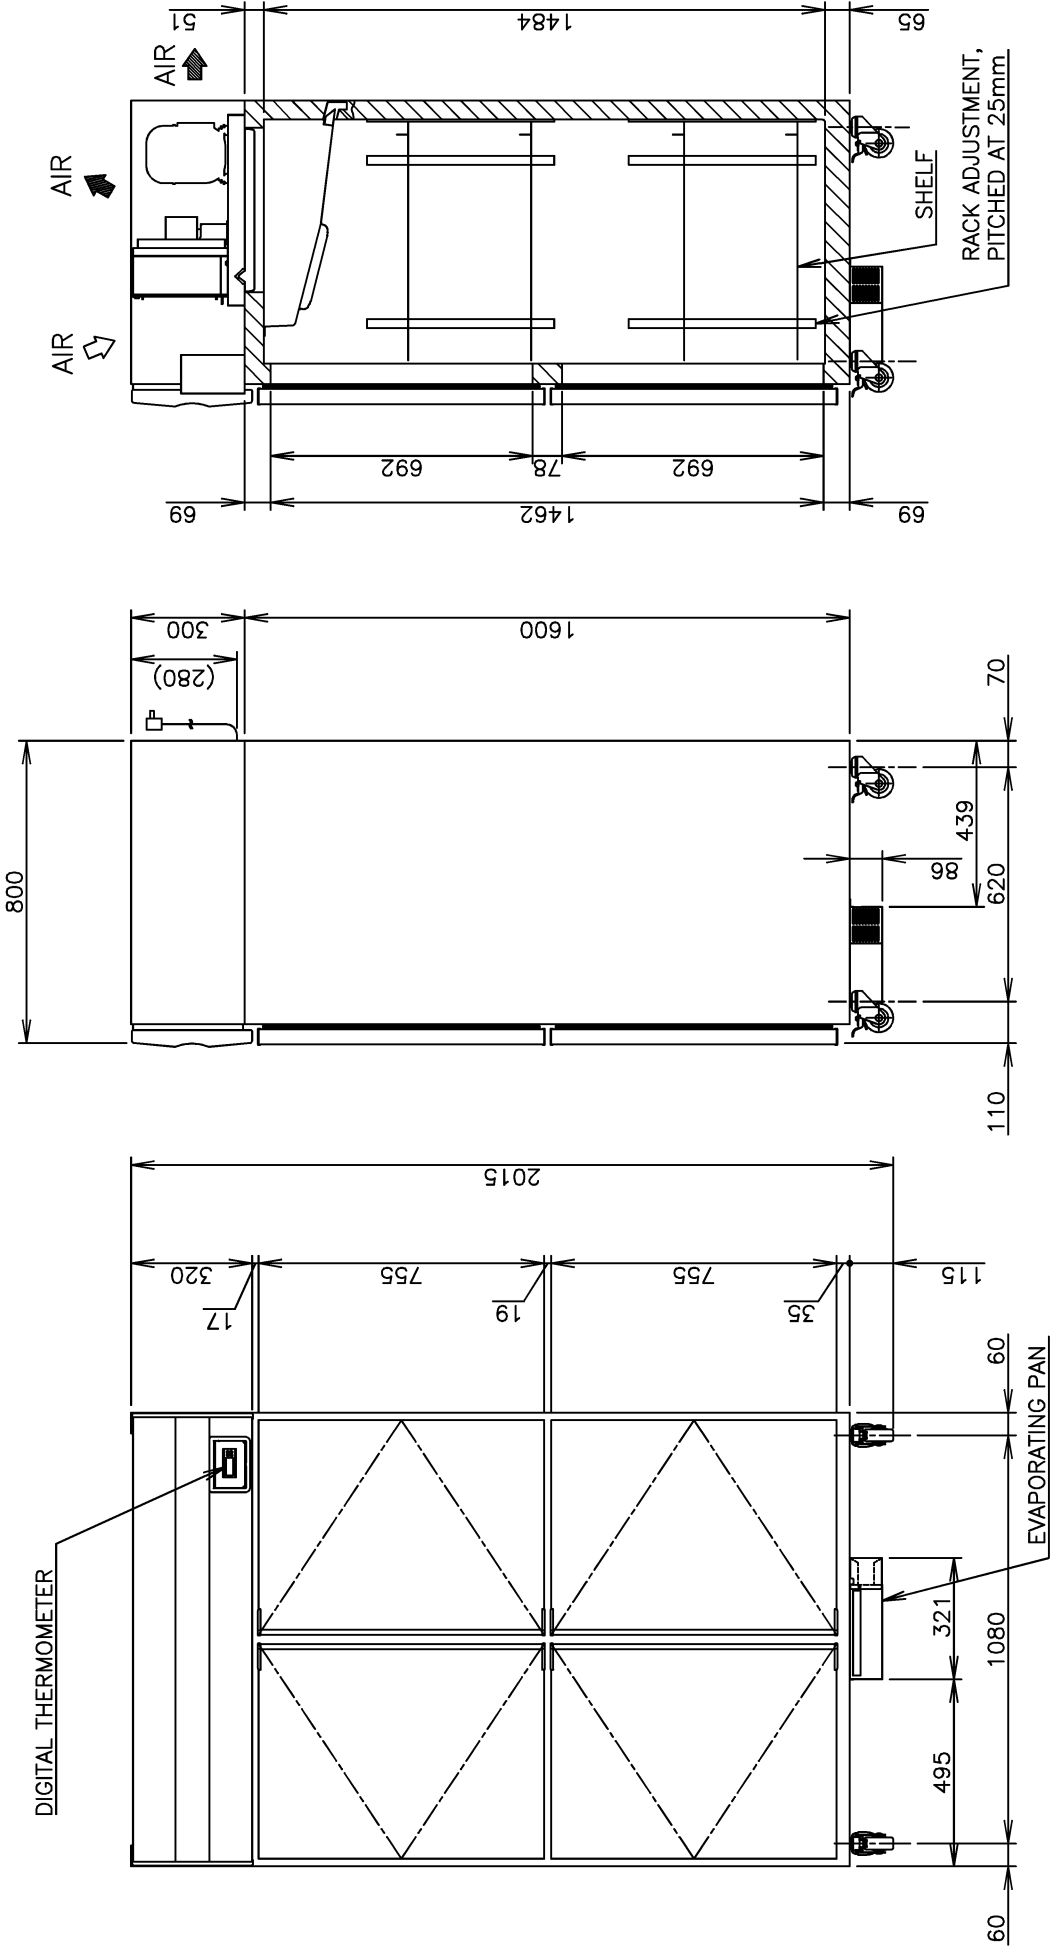

HOSHIZAKI REACH-IN FREEZER HF-128MA-A

APPROVED	CHECKED	DESIGNED	DRAWN	SCALE	1/20	TRIGONOMETRY
NAGASE	WANG	LIANG	SHAN			
**	**	**	**	DATE	2019.08.23	DRAWING NO.
APPROVED	DESIGNED	SYMBOL	DATE			D26824
						SYMBOL
						△